




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

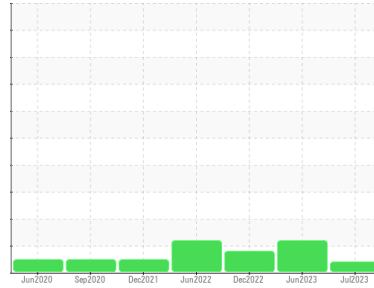

Machine Id
723002
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. No other corrective action is recommended at this time. The fluid was specified as PETRO CANADA DURON SHP 15W40, however, a fluid match indicates that this fluid is SAE 30 Diesel Engine Oil. Please confirm the oil type and grade on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090839	GFL0082566	GFL0065881
Sample Date	Client Info		31 Jul 2023	08 Jun 2023	19 Dec 2022
Machine Age	kms	Client Info	14666	0	27126
Oil Age	kms	Client Info	0	273016	1902
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			ABNORMAL	ABNORMAL	MARGINAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	16	20	23
Chromium	ppm	ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >5	1	2	2
Titanium	ppm	ASTM D5185(m) >2	<1	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	4	4	3
Lead	ppm	ASTM D5185(m) >40	2	<1	1
Copper	ppm	ASTM D5185(m) >330	3	4	2
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	23	2	2
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	46	59	56
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	585	928	880
Calcium	ppm	ASTM D5185(m) 1070	1754	1121	1071
Phosphorus	ppm	ASTM D5185(m) 1150	891	990	980
Zinc	ppm	ASTM D5185(m) 1270	991	1160	1116
Sulfur	ppm	ASTM D5185(m) 2060	2311	2261	2131
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	5	4
Sodium	ppm	ASTM D5185(m)	4	9	5
Potassium	ppm	ASTM D5185(m) >20	1	<1	<1
Fuel	%	ASTM D7593* >3.0	2.5	▲ 4.1	▲ 4.3

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.6	0.4	0.5
Nitration	Abs/cm	ASTM D7624* >20	10.5	11.0	12.1
Sulfation	Abs/.1mm	ASTM D7415* >30	22.6	23.1	25.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	21.4	19.3	20.3











OIL ANALYSIS REPORT

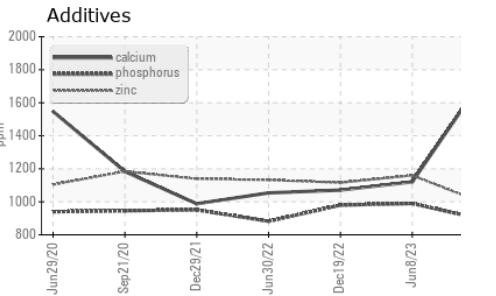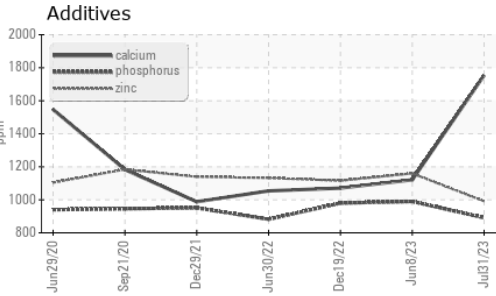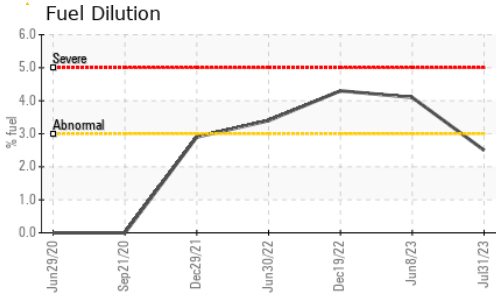

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.2	▲ 12.2

GRAPHS

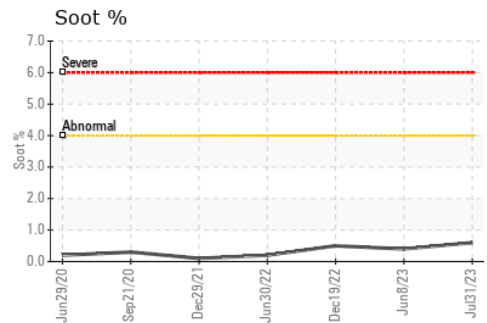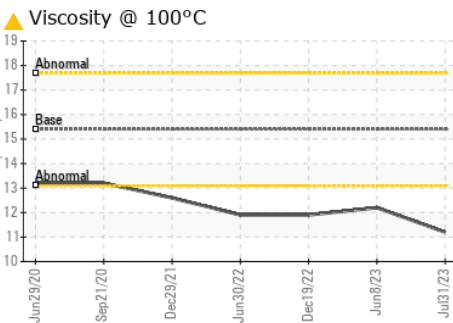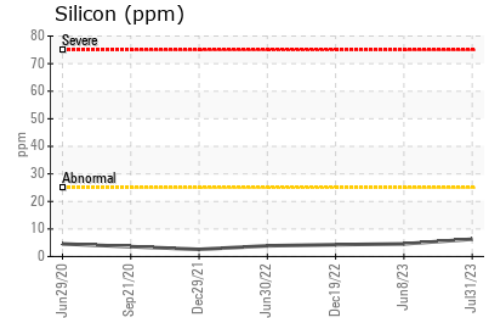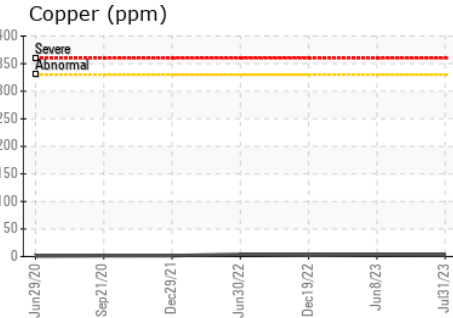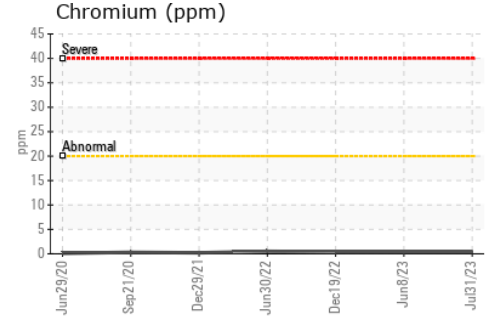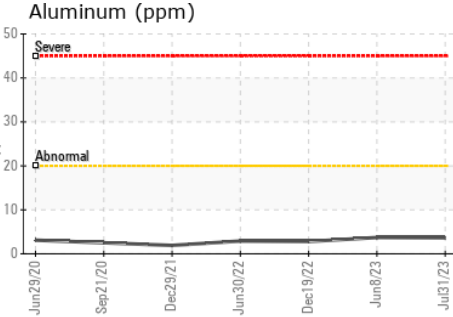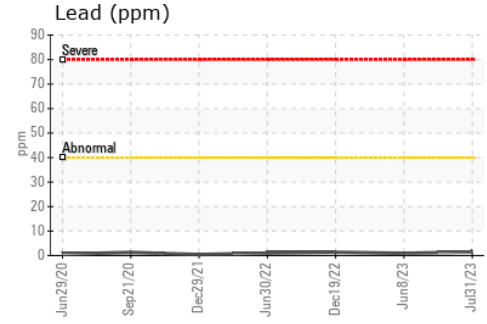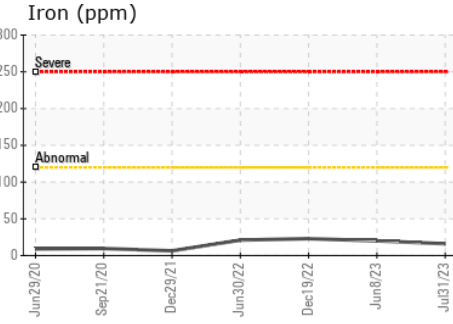

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 246 - Windsor**
Sample No. : GFL0090839 **Received** : 01 Aug 2023
Lab Number : 02573341 **Diagnosed** : 02 Aug 2023
Unique Number : 5618392 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

2700 Deziel Dr
 Windsor, ON
 CA N8W 5H8
 Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F: