




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

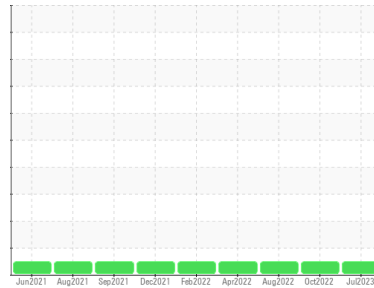

Machine Id
427013

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0084081	GFL0057550	GFL0039337
Sample Date	Client Info		10 Jul 2023	13 Oct 2022	03 Aug 2022
Machine Age	hrs	Client Info	31780	29143	0
Oil Age	hrs	Client Info	600	600	1200
Oil Changed		Client Info	N/A	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	45	28	16
Chromium	ppm	ASTM D5185(m) >20	2	1	<1
Nickel	ppm	ASTM D5185(m) >4	0	0	0
Titanium	ppm	ASTM D5185(m)	<1	<1	<1
Silver	ppm	ASTM D5185(m) >3	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	1	1	<1
Lead	ppm	ASTM D5185(m) >40	11	5	2
Copper	ppm	ASTM D5185(m) >330	2	1	<1
Tin	ppm	ASTM D5185(m) >15	1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	3	2
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	64	61	58
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	1043	981	962
Calcium	ppm	ASTM D5185(m) 1070	1101	1155	1084
Phosphorus	ppm	ASTM D5185(m) 1150	1112	1074	973
Zinc	ppm	ASTM D5185(m) 1270	1273	1221	1191
Sulfur	ppm	ASTM D5185(m) 2060	2431	2519	2586
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	5	5	4
Sodium	ppm	ASTM D5185(m)	5	2	4
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	1.5	1	0.5
Nitration	Abs/cm	ASTM D7624* >20	11.6	9.9	8.1
Sulfation	Abs/.1mm	ASTM D7415* >30	26.8	24.0	22.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	22.9	19.9	17.4











OIL ANALYSIS REPORT

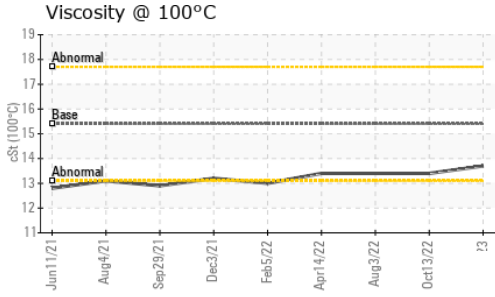

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	13.4

GRAPHS

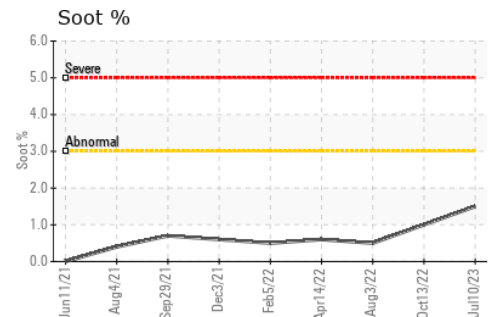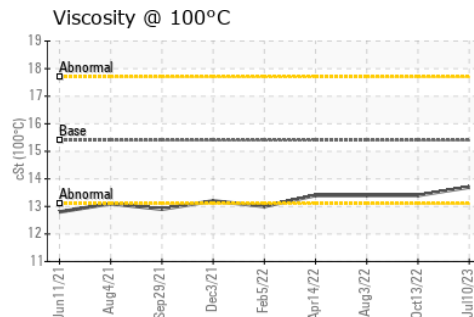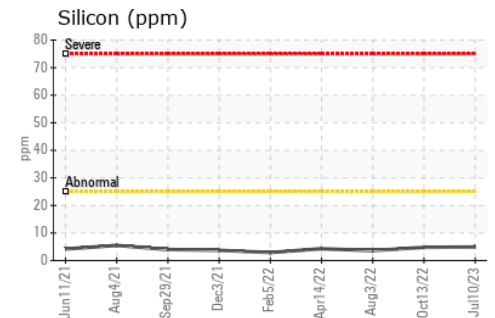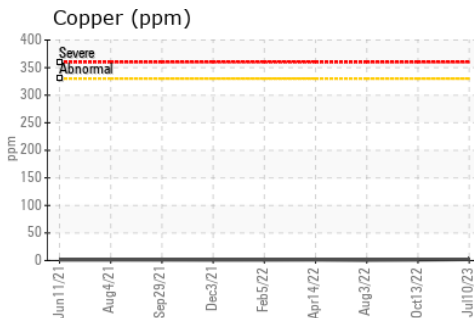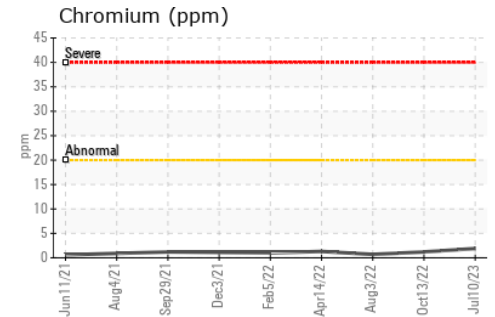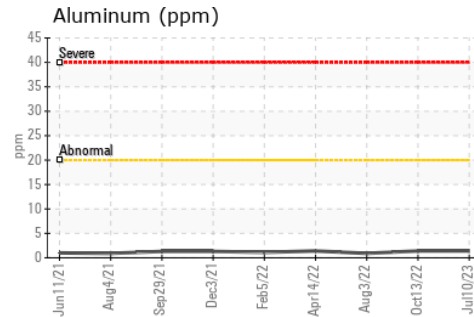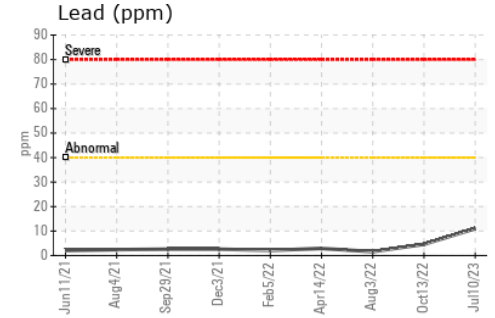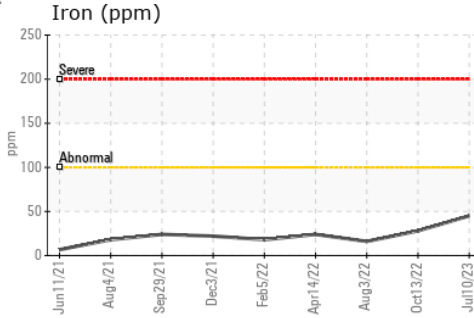

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 574 - Vancouver Fleet
Sample No. : GFL0084081 **Received** : 02 Aug 2023
Lab Number : 02573593 **Diagnosed** : 02 Aug 2023
Unique Number : 5618644 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Allison Adams
 aadams@gflenv.com
 T: (604)529-4023
 F: