




OIL ANALYSIS REPORT

Sample Rating Trend

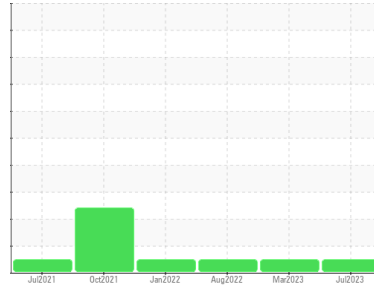

NORMAL



Machine Id
359046

Component
Gasoline Engine

Fluid
MOTORCRAFT SYNTHETIC BLEND 5W20 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0084076	GFL0073113	GFL0050495
Sample Date	Client Info	11 Jul 2023	07 Mar 2023	12 Aug 2022
Machine Age	hrs	4535	5437	56280
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >150	16	23	11
Chromium	ppm ASTM D5185(m) >20	<1	0	0
Nickel	ppm ASTM D5185(m) >5	0	<1	0
Titanium	ppm ASTM D5185(m)	<1	0	<1
Silver	ppm ASTM D5185(m) >2	0	0	0
Aluminum	ppm ASTM D5185(m) >40	3	3	3
Lead	ppm ASTM D5185(m) >50	0	0	<1
Copper	ppm ASTM D5185(m) >155	2	2	3
Tin	ppm ASTM D5185(m) >10	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	<1	<1	<1
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	8	8	16
Barium	ppm ASTM D5185(m)	0	0	0
Molybdenum	ppm ASTM D5185(m)	87	66	225
Manganese	ppm ASTM D5185(m)	1	1	1
Magnesium	ppm ASTM D5185(m)	422	369	512
Calcium	ppm ASTM D5185(m)	1082	1057	1673
Phosphorus	ppm ASTM D5185(m)	636	560	626
Zinc	ppm ASTM D5185(m)	706	591	740
Sulfur	ppm ASTM D5185(m)	1856	1609	1871
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >30	13	7	15
Sodium	ppm ASTM D5185(m) >400	26	18	28
Potassium	ppm ASTM D5185(m) >20	2	2	4
Glycol	% ASTM D7922*	0.0	NEG	0.0

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% ASTM D7844*	0	0	0
Nitration	Abs/cm ASTM D7624*	11.6	10.8	11.3
Sulfation	Abs/.1mm ASTM D7415*	27.9	26.0	23.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414*	21.7	17.0	19.0











OIL ANALYSIS REPORT

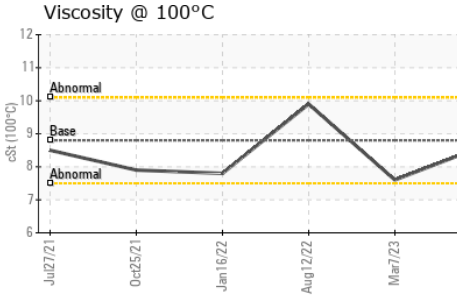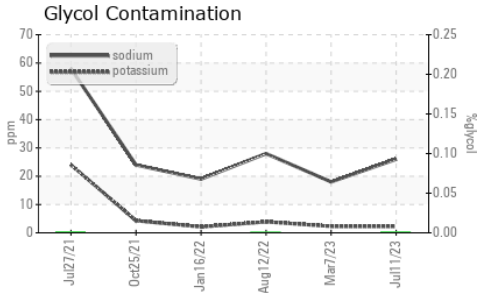

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	8.8	8.6	7.6

GRAPHS

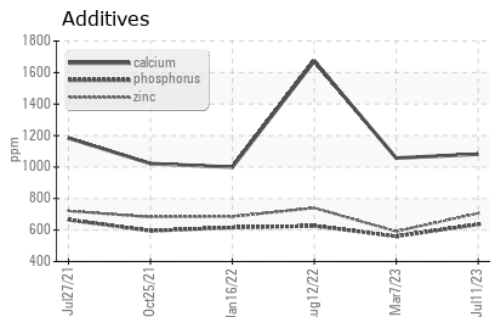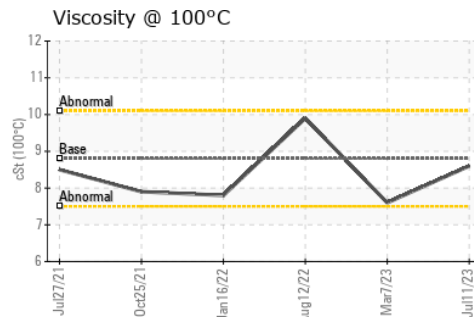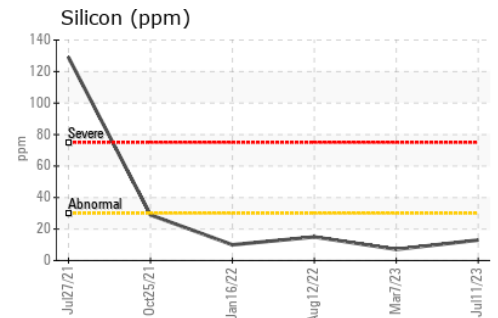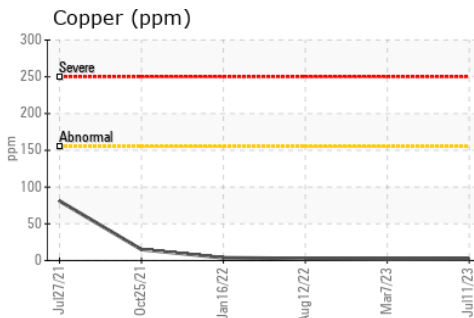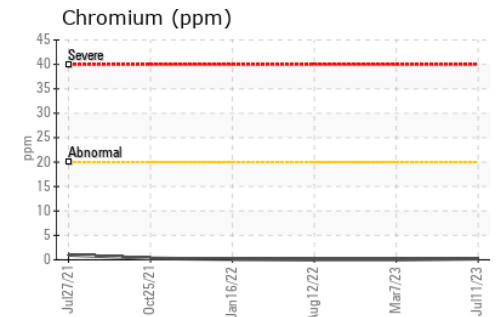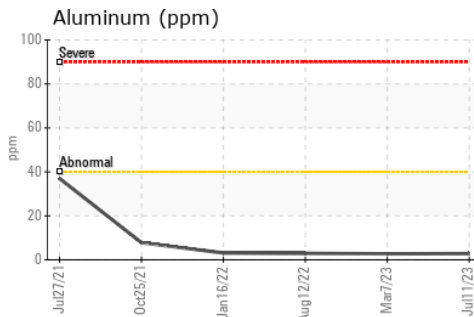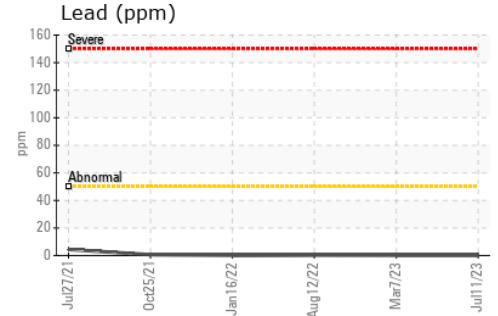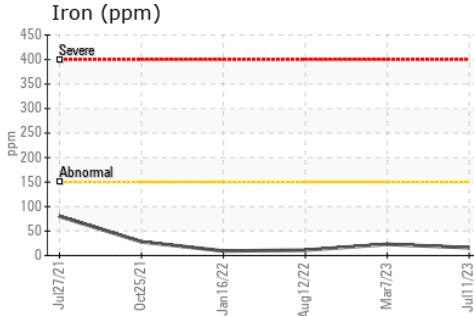

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 574 - Vancouver Fleet
Sample No. : GFL0084076 **Received** : 02 Aug 2023
Lab Number : 02573600 **Diagnosed** : 02 Aug 2023
Unique Number : 5618651 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Allison Adams
 aadams@gflenv.com
 T: (604)529-4023
 F: