


# PROBLEM SUMMARY


Area  
**Fwd Machinery Space [450164935]**  
 Machine Id  
**Thruster Aft Port - Steering Tube Seal (S/N Sample Tag CL-06002-S5)**  
 Component  
**Steering**  
 Fluid  
**CASTROL ALPHA SP150 (35 LTR)**

Sample Rating Trend

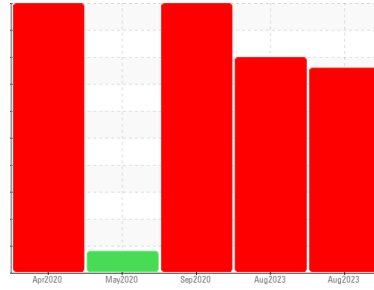

## COMPONENT CONDITION SUMMARY

Particle Trend

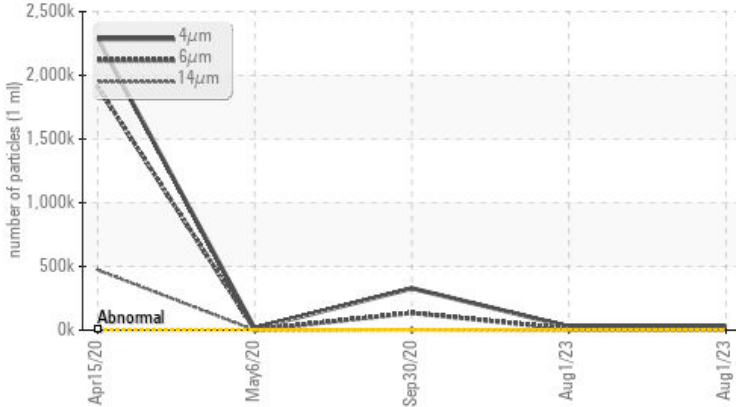

## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	SEVERE
Particles >4µm	ASTM D7647	>2500	28125	30533	328396
Particles >6µm	ASTM D7647	>640	9254	9290	135250
Particles >14µm	ASTM D7647	>80	749	737	5387
Particles >21µm	ASTM D7647	>20	280	199	1285
Oil Cleanliness	ISO 4406 (c)	>18/16/13	22/20/17	22/20/17	26/24/20

Customer Id: TERHAM  
 Sample No.: PC  
 Lab Number: 02573834  
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

## HISTORICAL DIAGNOSIS

### 01 Aug 2023 Diag: Kevin Marson

ISO



We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the fluid. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



### 30 Sep 2020 Diag: Kevin Marson

ISO



Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this fluid. We recommend that you drain the fluid from the component if this has not already been done. We recommend that you change the oil. Resample in 30-45 days to monitor this situation. Chromium, iron and nickel ppm levels are abnormal. Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Particles >4µm are severely high. Particles >4µm are severely high.. Particles >4µm are severely high... Particles >38µm are abnormally high. There is a moderate concentration of water present in the fluid. Free water present. The white residue present in the sample is fluid additive precipitate. The AN level is acceptable for this fluid. The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

view report



### 06 May 2020 Diag: Kevin Marson

ISO




We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. Particles >4µm are abnormally high. Particles >6µm are abnormally high. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



Area  
**Fwd Machinery Space [450164935]**  
 Machine Id  
**Thruster Aft Port - Steering Tube Seal (S/N Sample Tag CL-06002-S5)**  
 Component  
**Steering**  
 Fluid  
**CASTROL ALPHA SP150 (35 LTR)**

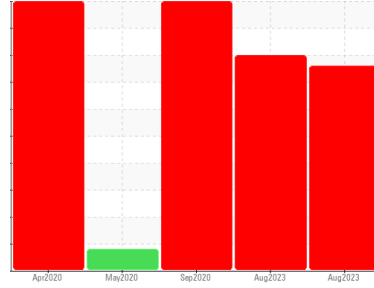

**DIAGNOSIS**

**Recommendation**

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

**Wear**

All component wear rates are normal.

**Contamination**

There is a high amount of particulates (2 to 100 microns in size) present in the fluid.

**Fluid Condition**

The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC</b>	PC	PC
Sample Date	Client Info	<b>01 Aug 2023</b>	01 Aug 2023	30 Sep 2020
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>SEVERE</b>	SEVERE	SEVERE

**WEAR METALS**

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	<b>10</b>	6	56	
Iron	ppm	ASTM D5185(m) >50	<b>1</b>	1	▲ 80
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	0	▲ 15
Nickel	ppm	ASTM D5185(m) >5	<b>0</b>	0	▲ 11
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	<b>4</b>	14	3
Barium	ppm	ASTM D5185(m) 4	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	1
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185(m) 4	<b>1</b>	<1	2
Calcium	ppm	ASTM D5185(m) 4	<b>2</b>	1	3
Phosphorus	ppm	ASTM D5185(m) 330	<b>313</b>	184	258
Zinc	ppm	ASTM D5185(m) 4	<b>5</b>	6	4
Sulfur	ppm	ASTM D5185(m)	<b>7994</b>	9782	8138
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1






**CONTAMINANTS**

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >15	<b>6</b>	3	2
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	8
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

**FLUID CLEANLINESS**

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>2500	<b>28125</b>	30533	328396
Particles >6µm	ASTM D7647	>640	<b>9254</b>	9290	135250
Particles >14µm	ASTM D7647	>80	<b>749</b>	737	5387
Particles >21µm	ASTM D7647	>20	<b>280</b>	199	1285
Particles >38µm	ASTM D7647	>4	<b>5</b>	▲ 8	▲ 30
Particles >71µm	ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>22/20/17</b>	22/20/17	26/24/20

# OIL ANALYSIS REPORT

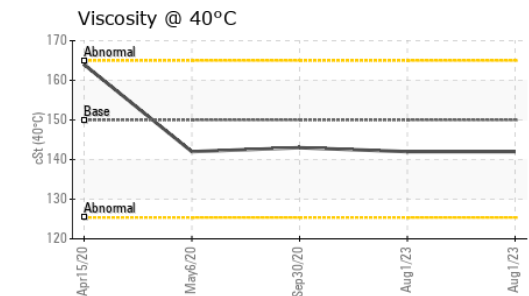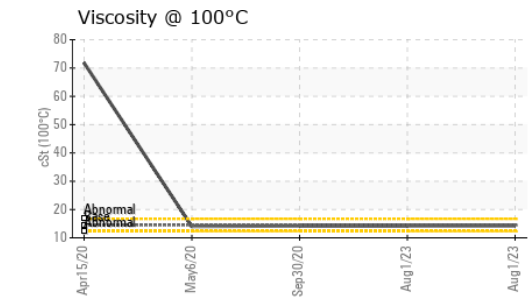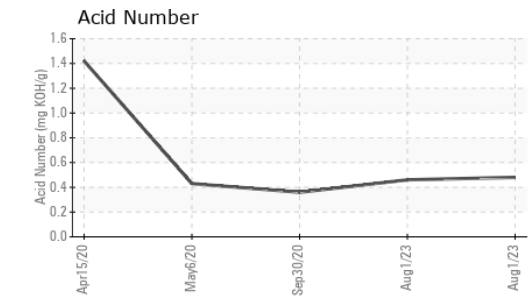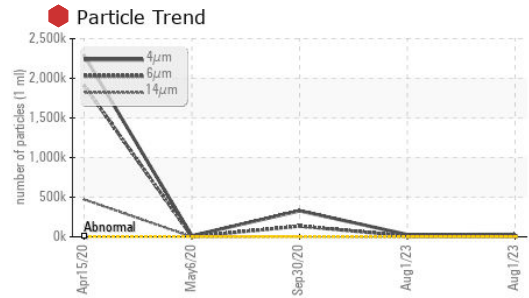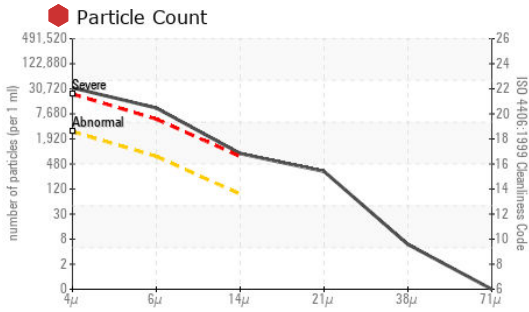

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC  
**Lab Number** : 02573834  
**Unique Number** : 5618885  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, PrtCount, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Strret  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D974*	<b>0.48</b>	0.46	0.36

## VISUAL

method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	▲ LIGHT
Silt	scalar Visual*	NONE	NONE	NONE
Debris	scalar Visual*	NONE	VLITE	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.2	NEG	▲ .5%
Free Water	scalar Visual*		NEG	▲ 1%

## FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D7279(m)	150.0	<b>142</b>	142	143
Visc @ 100°C	cSt ASTM D7279(m)	14.5	<b>14.2</b>	14.2	14.2
Viscosity Index (VI)	Scale ASTM D2270*	95	<b>97</b>	97	96

## SAMPLE IMAGES

