


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

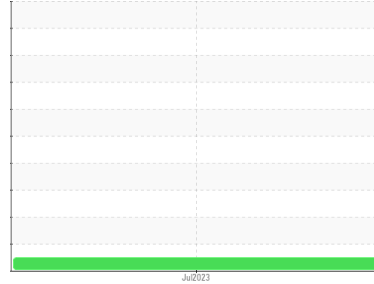

Machine Id  
**1099**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. The water content is negligible. Test for glycol is negative. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0044979</b>	---	---
Sample Date	Client Info			<b>18 Jul 2023</b>	---	---
Machine Age	kms	Client Info		<b>362088</b>	---	---
Oil Age	kms	Client Info		<b>1000</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>65	<b>36</b>	---	---
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>35	<b>13</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>180	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>8	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>35	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>14</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	60	<b>63</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	1010	<b>736</b>	---	---
Calcium	ppm	ASTM D5185(m)	1070	<b>1247</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1083</b>	---	---
Zinc	ppm	ASTM D5185(m)	1270	<b>1167</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2060	<b>2733</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>4</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Fuel	%	ASTM D7593*	>3.0	<b>0.8</b>	---	---
Glycol	%	ASTM D7922*		<b>0.0</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.6</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.5</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>13.5</b>	---	---

# OIL ANALYSIS REPORT











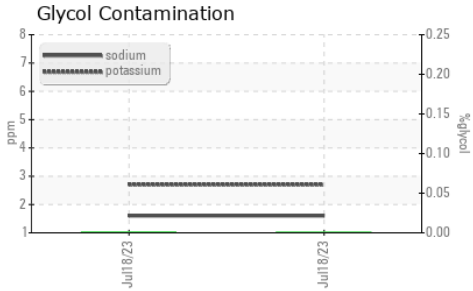


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	<b>107</b>	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>14.6</b>	---
Viscosity Index (VI)	Scale	ASTM D2270*	139	<b>140</b>	---

## GRAPHS

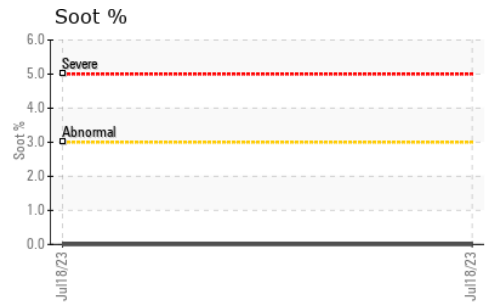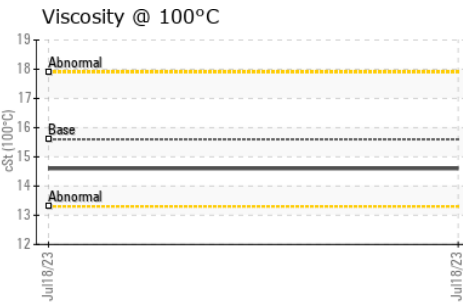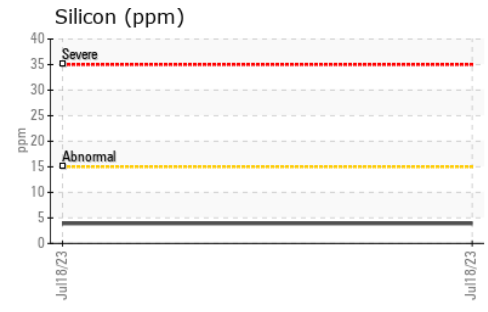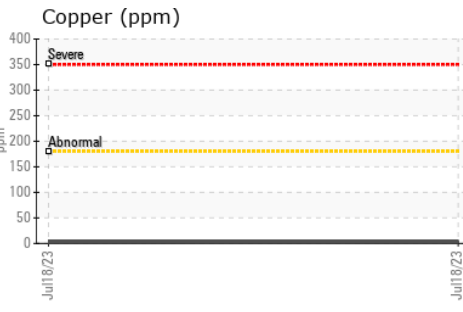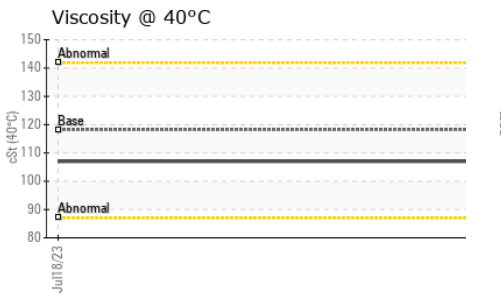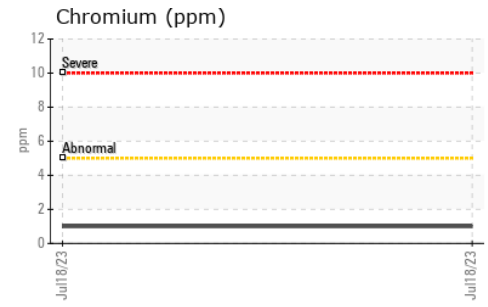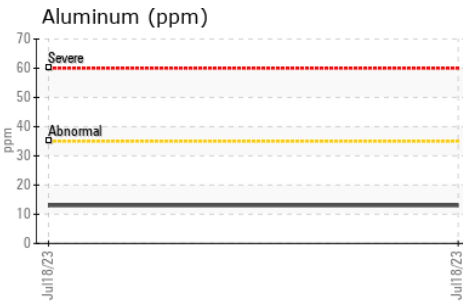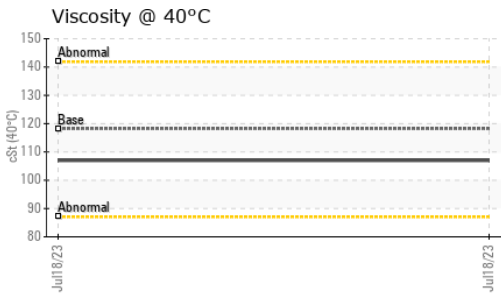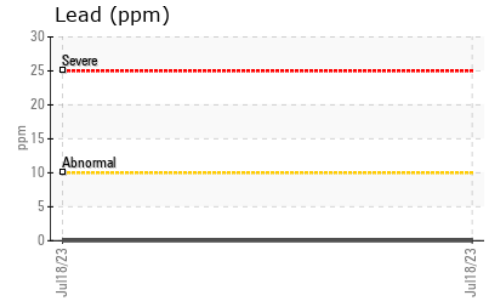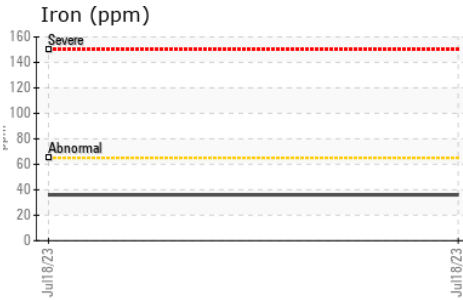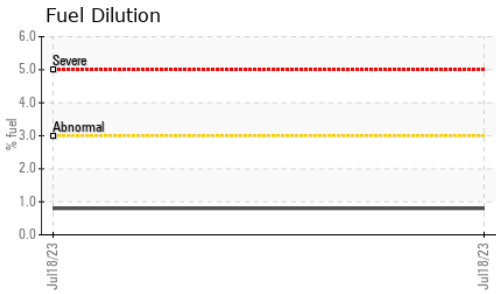

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0044979 **Received** : 04 Aug 2023  
**Lab Number** : **02574165** **Diagnosed** : 09 Aug 2023  
**Unique Number** : 5619216 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FUELDILUTION, GLYCOL, KV40, PercentFuel, VI )

**AJ MECHANICAL**  
 BOX 83  
 SWIFT CURRENT, SK  
 CA S9H 3V5  
 Contact: Alex Dmyterko  
 ajmechanical@sasktel.net  
 T: (306)741-9755  
 F: (306)773-7040

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.