


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

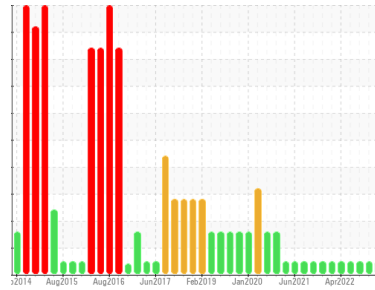

Machine Id
E220721
Component
Rear Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0075548	PC0068527	PC0053766
Sample Date	Client Info		31 Jul 2023	09 Jan 2023	22 Oct 2022
Machine Age	kms	Client Info	205849	188522	0
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	12	12	11
Chromium	ppm	ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >2	0	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	3	4	2
Lead	ppm	ASTM D5185(m) >40	0	<1	0
Copper	ppm	ASTM D5185(m) >330	<1	<1	<1
Tin	ppm	ASTM D5185(m) >15	0	0	0
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	5	6
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	59	60	61
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	971	950	971
Calcium	ppm	ASTM D5185(m) 1070	1046	1134	1109
Phosphorus	ppm	ASTM D5185(m) 1150	1062	1084	1090
Zinc	ppm	ASTM D5185(m) 1270	1202	1205	1195
Sulfur	ppm	ASTM D5185(m) 2060	2559	2666	2654
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	3	3	3
Sodium	ppm	ASTM D5185(m)	5	5	5
Potassium	ppm	ASTM D5185(m) >20	<1	0	0



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	0.5	0.4	0.4
Nitration	Abs/cm	ASTM D7624* >20	8.6	9.6	8.1
Sulfation	Abs/.1mm	ASTM D7415* >30	20.7	21.2	20.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	16.2	17.2	15.8









OIL ANALYSIS REPORT

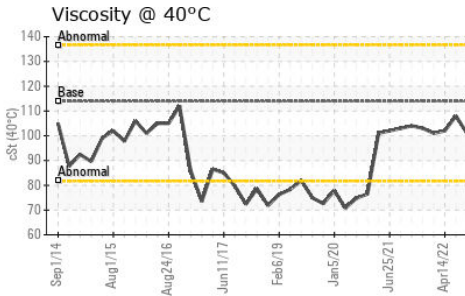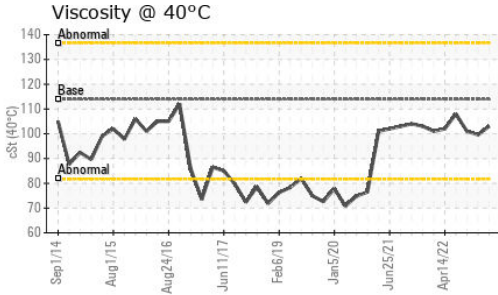

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	113.9	103	99.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.0	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	142	137	138

GRAPHS

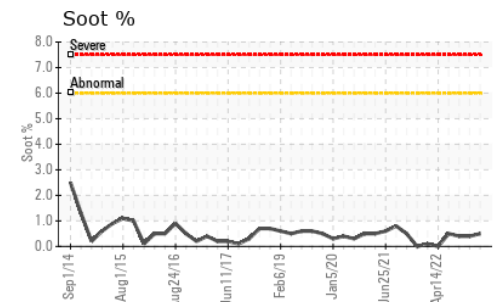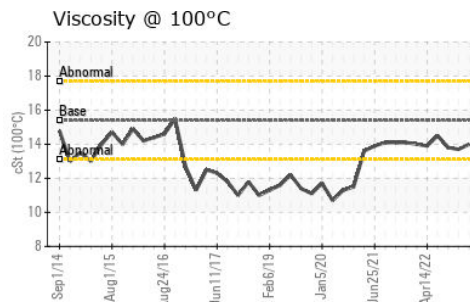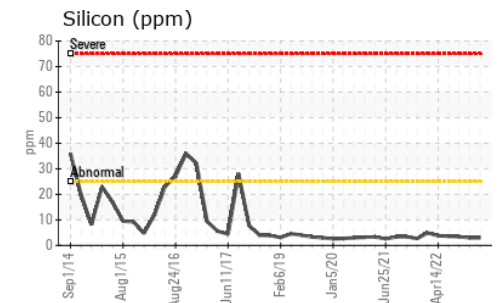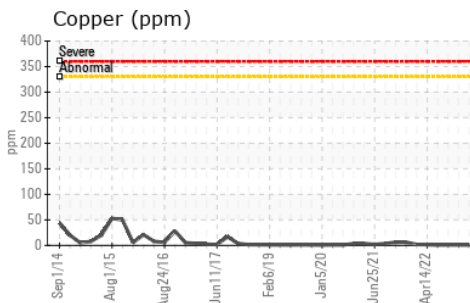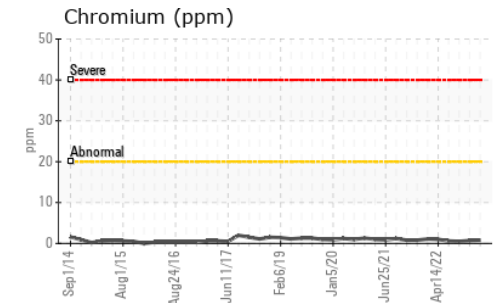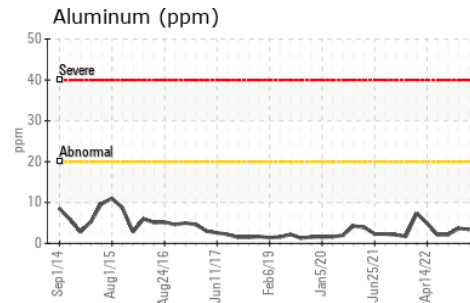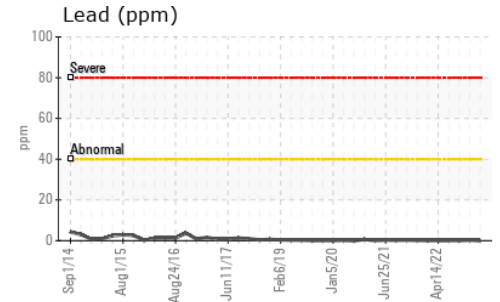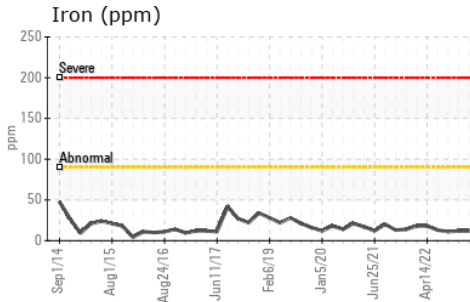

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0075548 **Received** : 08 Aug 2023
Lab Number : 02574458 **Diagnosed** : 08 Aug 2023
Unique Number : 5619509 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

MILLER TRANSIT
 8050 WOODBINE AVE.
 MARKHAM, ON
 CA L3R 2N8
 Contact: Dan Sguigna
 Dan.sguigna@millertransit.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: x:
 F: x: