




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

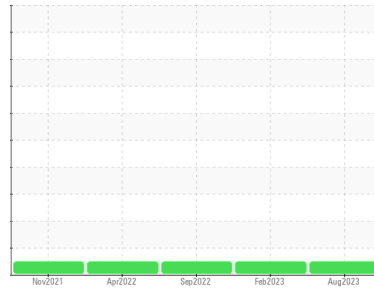

Machine Id  
**731106**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0085850</b>	GFL0071071	GFL0054893
Sample Date	Client Info		<b>08 Aug 2023</b>	21 Feb 2023	22 Sep 2022
Machine Age	hrs	Client Info	<b>5625</b>	4457	3341
Oil Age	hrs	Client Info	<b>1200</b>	1200	1000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	<b>11</b>	10	11
Chromium	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m) >30	<b>6</b>	4	3
Copper	ppm	ASTM D5185(m) >35	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	<b>8</b>	9	7
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>57</b>	65	53
Manganese	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 560	<b>582</b>	481	584
Calcium	ppm	ASTM D5185(m) 1510	<b>1578</b>	1795	1650
Phosphorus	ppm	ASTM D5185(m) 780	<b>726</b>	756	748
Zinc	ppm	ASTM D5185(m) 870	<b>927</b>	937	954
Sulfur	ppm	ASTM D5185(m) 2040	<b>2059</b>	2160	2078
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	<b>4</b>	4	4
Sodium	ppm	ASTM D5185(m)	<b>9</b>	9	9
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	<b>&gt;20</b>	11.6	11.7
Sulfation	Abs/.1mm	ASTM D7415*	<b>&gt;30</b>	26.9	24.5

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>&gt;25</b>	19.9	20.0

## VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	<b>&gt;0.1</b>	<b>NEG</b>	NEG
Free Water	scalar	Visual*	<b>NEG</b>	NEG	NEG











# OIL ANALYSIS REPORT

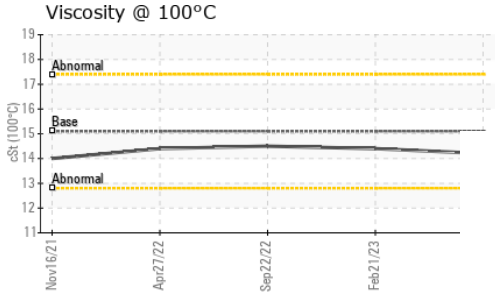

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.2	14.4	14.5

## GRAPHS

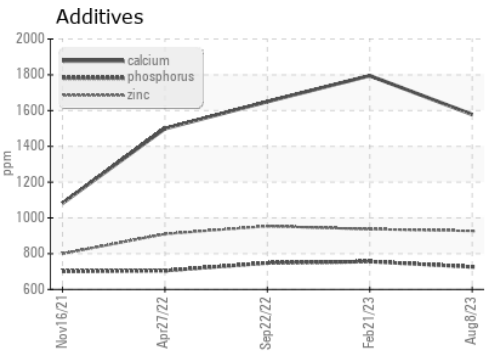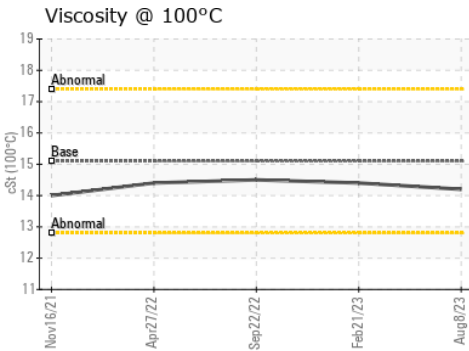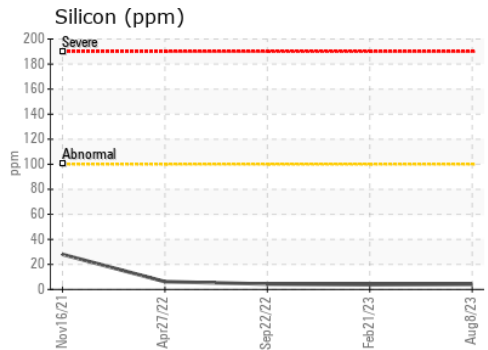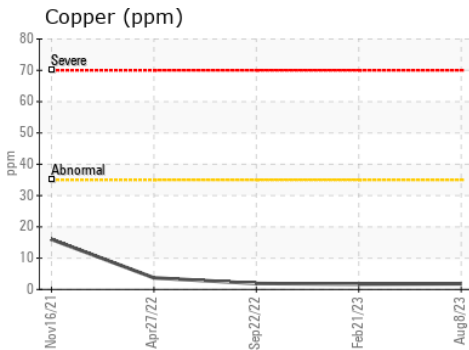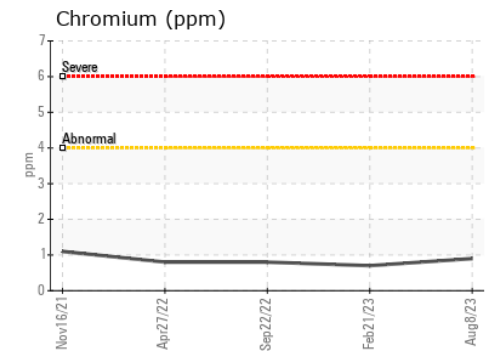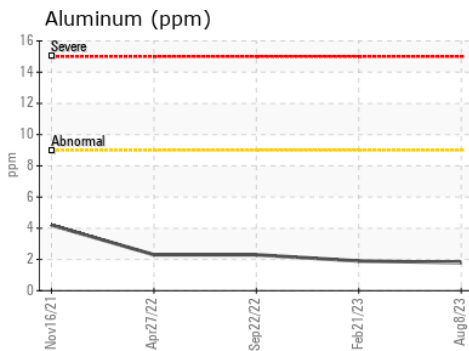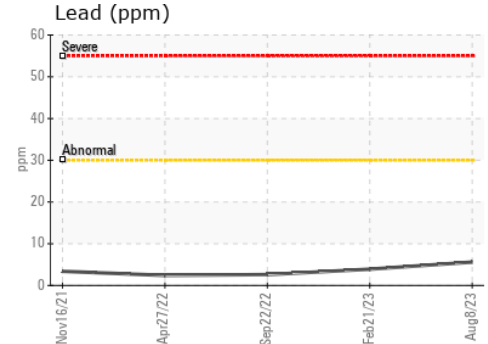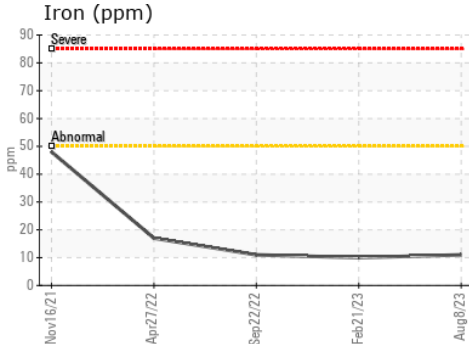

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 209 - Hamilton**  
**Sample No.** : GFL0085850 **Received** : 10 Aug 2023 **560 Seaman Street**  
**Lab Number** : 02575130 **Diagnosed** : 10 Aug 2023 **Stoney Creek, ON**  
**Unique Number** : 5620181 **Diagnostician** : Wes Davis **CA L8E 3X7**  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Contact: Fred Carleton**  
**fred.carleton@gflenv.com**  
**T: (289)925-6693**  
**F: (905)664-9008**