




OIL ANALYSIS REPORT

Sample Rating Trend

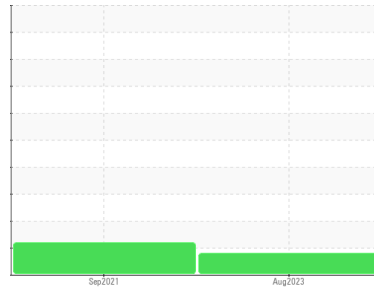

FUEL



Machine Id
OR1022

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0087366	GFL0030486	---
Sample Date	Client Info	02 Aug 2023	22 Sep 2021	---
Machine Age	hrs	14483	12975	---
Oil Age	hrs	500	500	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >100	43	56	---
Chromium	ppm	ASTM D5185(m) >20	1	2	---
Nickel	ppm	ASTM D5185(m) >4	<1	<1	---
Titanium	ppm	ASTM D5185(m)	<1	0	---
Silver	ppm	ASTM D5185(m) >3	0	0	---
Aluminum	ppm	ASTM D5185(m) >20	1	1	---
Lead	ppm	ASTM D5185(m) >40	10	8	---
Copper	ppm	ASTM D5185(m) >330	12	4	---
Tin	ppm	ASTM D5185(m) >15	1	<1	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	<1	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	5	3	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 60	65	58	---
Manganese	ppm	ASTM D5185(m) 0	<1	<1	---
Magnesium	ppm	ASTM D5185(m) 1010	999	986	---
Calcium	ppm	ASTM D5185(m) 1070	1208	1072	---
Phosphorus	ppm	ASTM D5185(m) 1150	1053	1018	---
Zinc	ppm	ASTM D5185(m) 1270	1227	1195	---
Sulfur	ppm	ASTM D5185(m) 2060	2355	2388	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	4	5	---
Sodium	ppm	ASTM D5185(m)	1	4	---
Potassium	ppm	ASTM D5185(m) >20	0	3	---
Fuel	%	ASTM D7593* >5	▲ 5.6	▲ 5.2	---

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	0.5	1	---
Nitration	Abs/cm	ASTM D7624* >20	9.6	11.6	---
Sulfation	Abs/.1mm	ASTM D7415* >30	24.5	26.7	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	20.2	23.6	---











OIL ANALYSIS REPORT

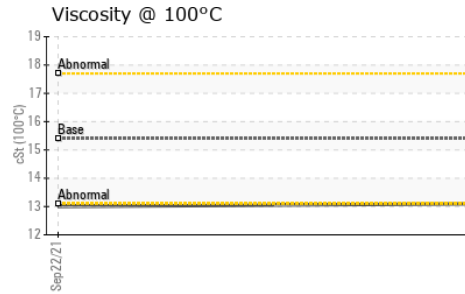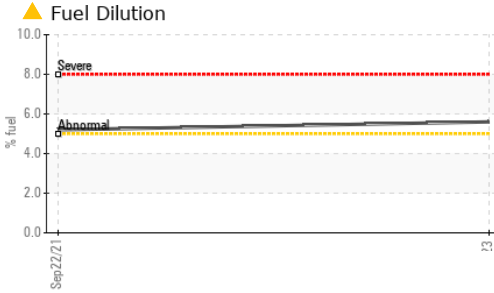

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.1	▲ 13.0

GRAPHS

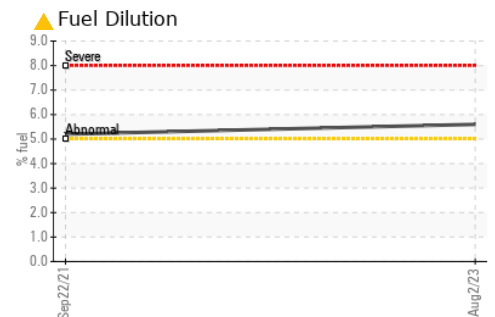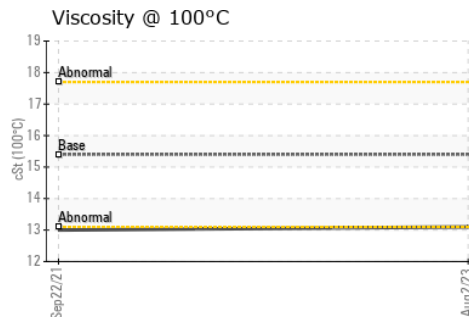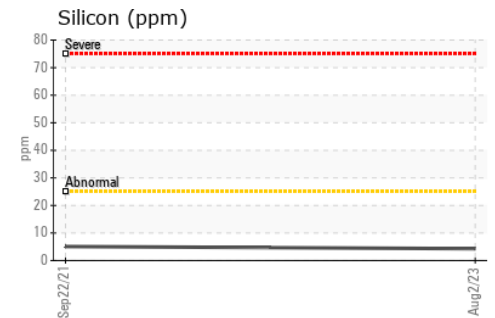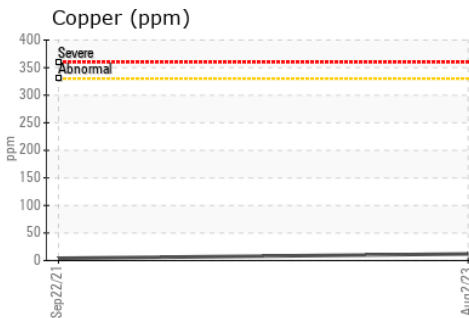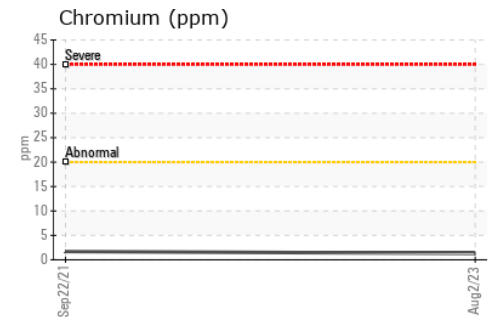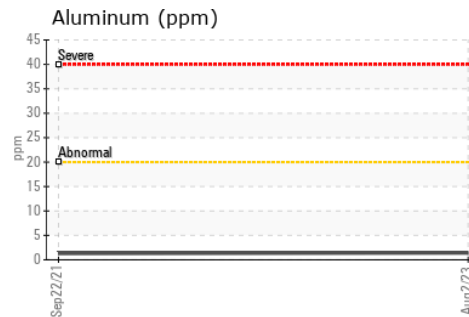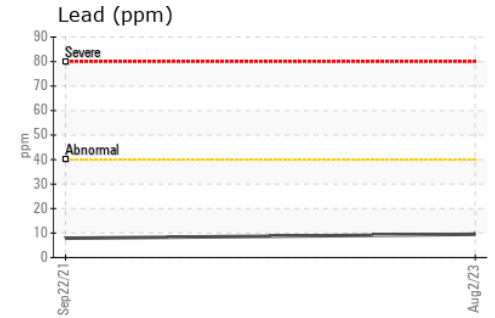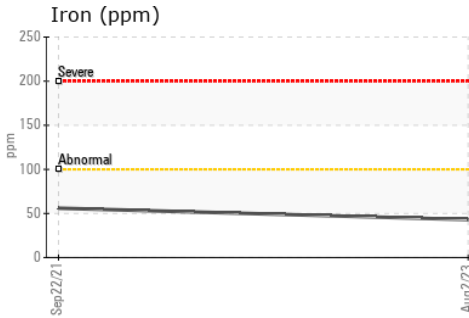

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill
Sample No. : GFL0087366 **Received** : 11 Aug 2023
Lab Number : 02575341 **Diagnosed** : 14 Aug 2023
Unique Number : 5620392 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F: