


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

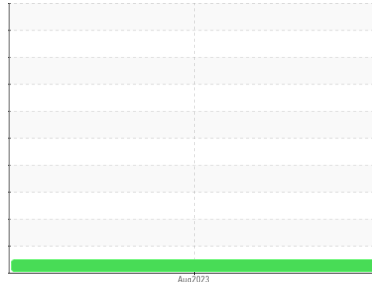

Machine Id
ATF SHOP LINE
Component
New (Unused) Oil
Fluid
HONDA ATF DW-1 (--- GAL)

DIAGNOSIS

Recommendation

This is the baseline readout on this new (unused) oil. The fluid is suitable for service.

Wear

{not applicable}

Contamination

There is no indication of any contamination in the new (unused) oil.

Fluid Condition

The condition of the oil is suitable for service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PC0072084 | --- | --- |
| Sample Date | Client Info | | 09 Aug 2023 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | | Client Info | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | <1 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | <1 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | <1 | --- | --- |
| Lead | ppm | ASTM D5185(m) | <1 | --- | --- |
| Copper | ppm | ASTM D5185(m) | <1 | --- | --- |
| Tin | ppm | ASTM D5185(m) | 0 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | <1 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 287 | --- | --- |
| Barium | ppm | ASTM D5185(m) | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | <1 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | 237 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | 395 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | 4 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | 361 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | 818 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|---------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | 4 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | 1 | --- | --- |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | --- | --- |
| Water | % | ASTM D6304* | 0.175 | --- | --- |
| ppm Water | ppm | ASTM D6304* | 1751.7 | --- | --- |




INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | 0 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | 7.5 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* | 42.2 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* | 42.7 | --- | --- |

OIL ANALYSIS REPORT

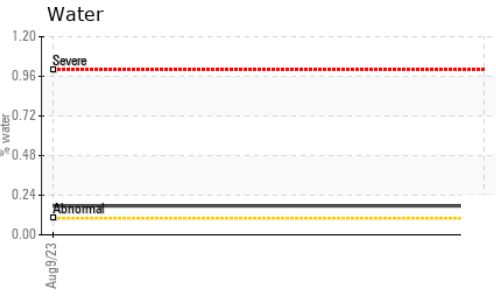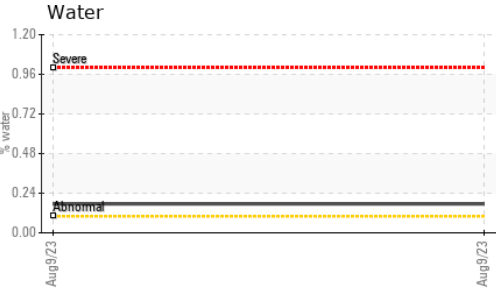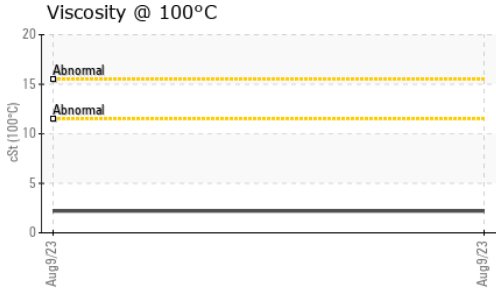


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- |
| Silt | scalar | Visual* | NONE | NONE | --- |
| Debris | scalar | Visual* | NONE | VLITE | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- |
| Odor | scalar | Visual* | NORML | NORML | --- |
| Emulsified Water | scalar | Visual* | NEG | --- | --- |
| Free Water | scalar | Visual* | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 25.6 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | 2.2 | --- | --- |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color | | | no image | no image |
| Bottom | | | no image | no image |

GRAPHS

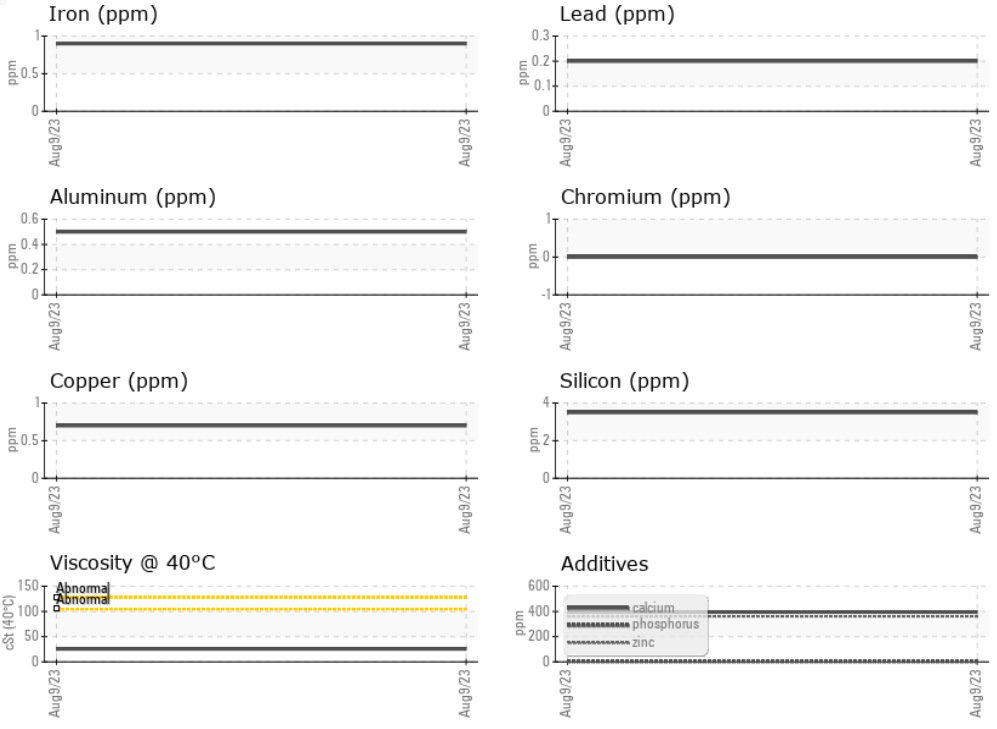

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **Petro-Canada Technical/Yen Garcia**
Sample No. : PC0072084 **Received** : 11 Aug 2023
Lab Number : 02575358 **Diagnosed** : 21 Aug 2023
Unique Number : 5620409 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Bottom, FT-IR, ICP-NewOil, KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Mississauga, ON
 CA L5J 1K2
 Contact: Yen Garcia
 yen.garcia@hfsinclair.com
 T:
 F: (905)403-6740