




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**EX0358**  
 Component  
**Center Swing Drive**  
 Fluid  
**PETRO CANADA TRAXON E SYNTHETIC 80W-140 (5 LTR)**

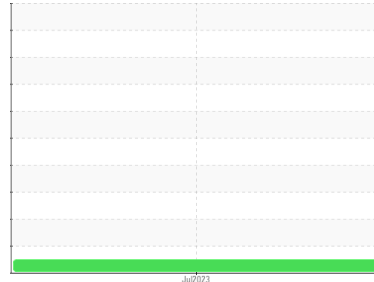

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0087389</b>	---	---
Sample Date	Client Info		<b>28 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>22000</b>	---	---
Oil Age	hrs	Client Info	<b>1000</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >400	<b>33</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >50	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >200	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m) >5	<b>19</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 202	<b>280</b>	---	---
Barium	ppm	ASTM D5185(m) <1	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) <1	<b>3</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>265</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1209	<b>1158</b>	---	---
Zinc	ppm	ASTM D5185(m) 1	<b>11</b>	---	---
Sulfur	ppm	ASTM D5185(m) 20439	<b>19077</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>11</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual* NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual* NONE	<b>NONE</b>	---	---
Silt	scalar	Visual* NONE	<b>NONE</b>	---	---
Debris	scalar	Visual* NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual* NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual* NORML	<b>NORML</b>	---	---
Odor	scalar	Visual* NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual* >0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT








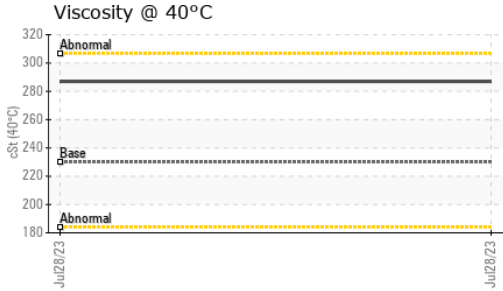


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	230	<b>287</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

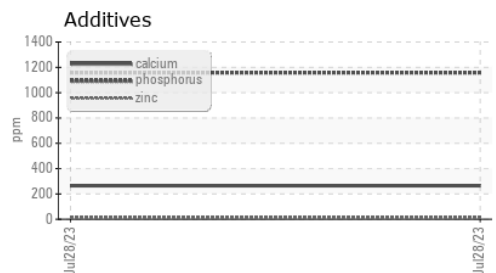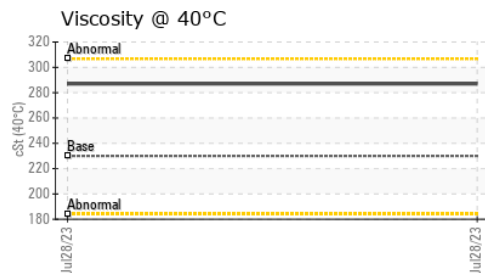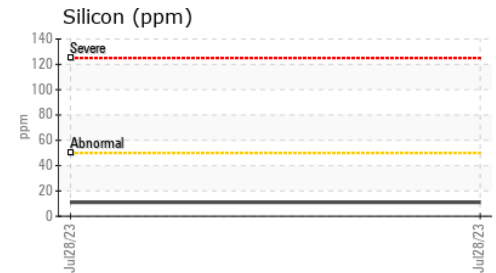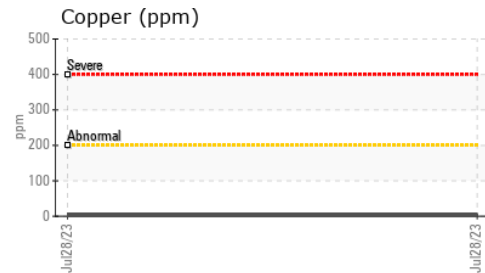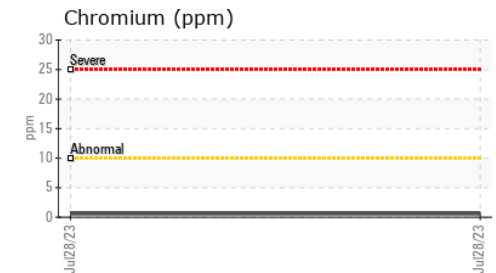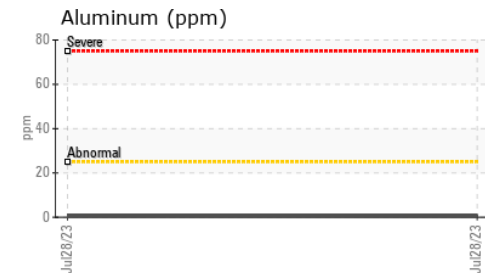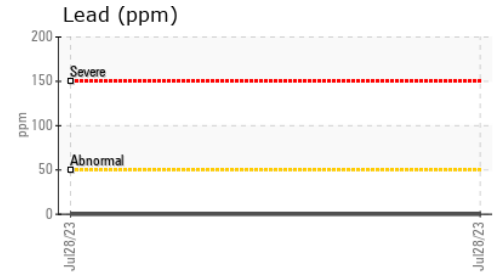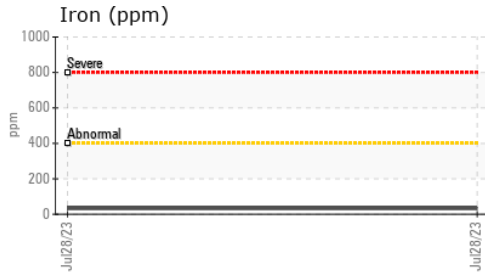

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill  
**Sample No.** : GFL0087389 **Received** : 11 Aug 2023  
**Lab Number** : 02575482 **Diagnosed** : 11 Aug 2023  
**Unique Number** : 5620533 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com  
 T: (613)538-4853  
 F: