




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
WL0424
Component
Front Differential
Fluid
SAE 30W (--- GAL)

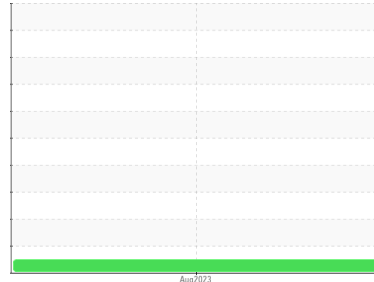

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. The fluid was specified as (GENERIC) SAE 30W, however, a fluid match indicates that this fluid is SAE 50 Transmission/Drive Train Oil. Please confirm the oil type and grade on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 50 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0077020	---	---
Sample Date	Client Info		09 Aug 2023	---	---
Machine Age	kms Client Info		5470	---	---
Oil Age	kms Client Info		0	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m)	>500	80	---	---
Chromium	ppm ASTM D5185(m)	>3	<1	---	---
Nickel	ppm ASTM D5185(m)	>3	0	---	---
Titanium	ppm ASTM D5185(m)	>2	0	---	---
Silver	ppm ASTM D5185(m)	>2	0	---	---
Aluminum	ppm ASTM D5185(m)	>30	2	---	---
Lead	ppm ASTM D5185(m)	>13	<1	---	---
Copper	ppm ASTM D5185(m)	>103	14	---	---
Tin	ppm ASTM D5185(m)	>5	0	---	---
Antimony	ppm ASTM D5185(m)	>5	0	---	---
Vanadium	ppm ASTM D5185(m)		0	---	---
Beryllium	ppm ASTM D5185(m)		0	---	---
Cadmium	ppm ASTM D5185(m)		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)		5	---	---
Barium	ppm ASTM D5185(m)		0	---	---
Molybdenum	ppm ASTM D5185(m)		6	---	---
Manganese	ppm ASTM D5185(m)		2	---	---
Magnesium	ppm ASTM D5185(m)		16	---	---
Calcium	ppm ASTM D5185(m)		3260	---	---
Phosphorus	ppm ASTM D5185(m)		1013	---	---
Zinc	ppm ASTM D5185(m)		1144	---	---
Sulfur	ppm ASTM D5185(m)		5034	---	---
Lithium	ppm ASTM D5185(m)		<1	---	---

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m)	>100	11	---	---
Sodium	ppm ASTM D5185(m)		<1	---	---
Potassium	ppm ASTM D5185(m)	>20	<1	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	---	---
Yellow Metal	scalar Visual*	NONE	NONE	---	---
Precipitate	scalar Visual*	NONE	NONE	---	---
Silt	scalar Visual*	NONE	NONE	---	---
Debris	scalar Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar Visual*	NONE	NONE	---	---
Appearance	scalar Visual*	NORML	NORML	---	---
Odor	scalar Visual*	NORML	NORML	---	---
Emulsified Water	scalar Visual*	>.2	NEG	---	---
Free Water	scalar Visual*		NEG	---	---



OIL ANALYSIS REPORT







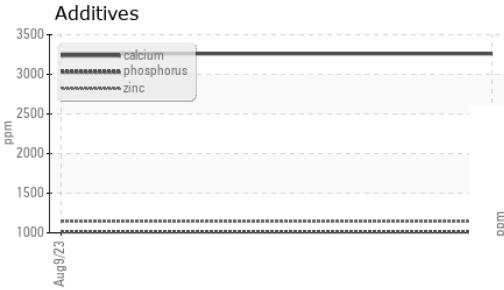
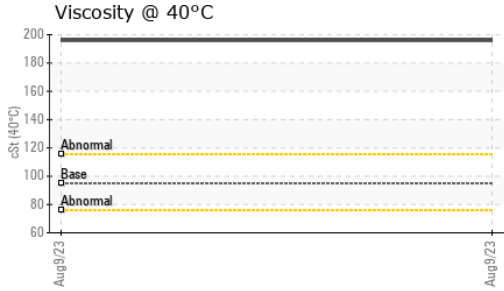


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	196	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

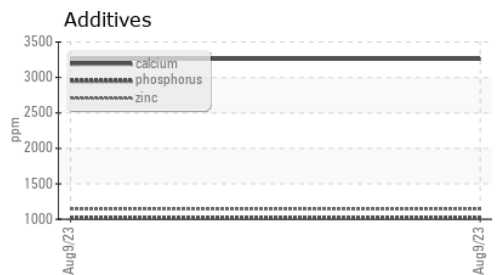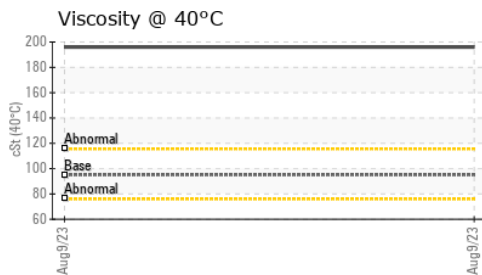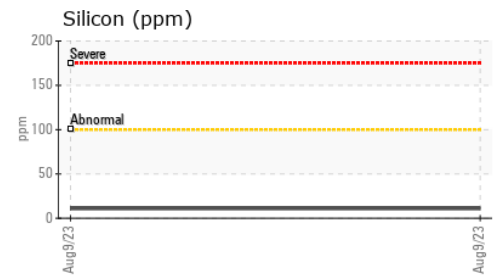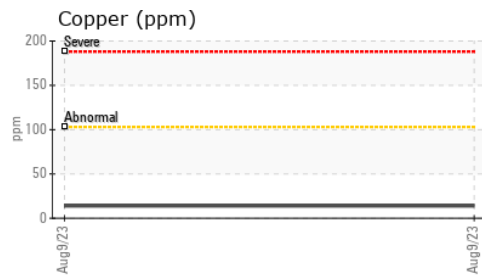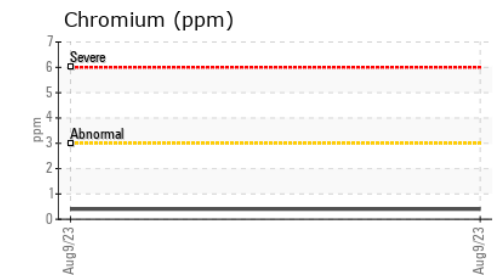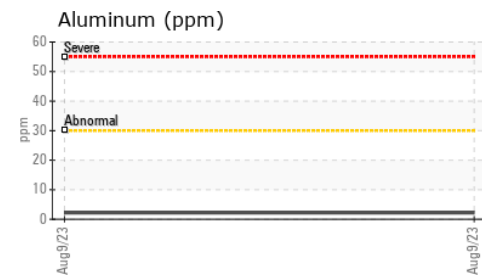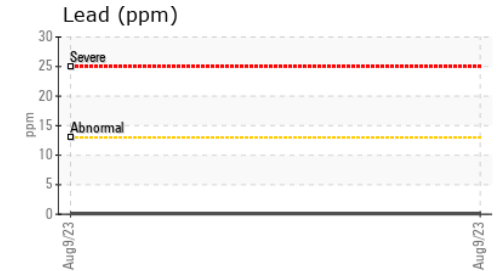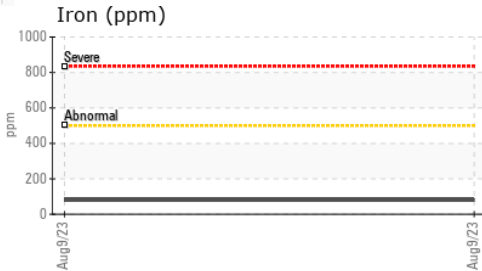

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 575 - Squamish Hauling
Sample No. : GFL0077020 **Received** : 14 Aug 2023 38950 Queens Way,
Lab Number : 02575776 **Diagnosed** : 14 Aug 2023 Squamish, BC
Unique Number : 5620827 **Diagnostician** : Kevin Marson CA V8B 0K8
Test Package : MOB 1 Contact: Jonas Araujo jaraujo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.