


OIL ANALYSIS REPORT

SHARP BUS LINES **INTERNATIONAL 4DRBUSKP5DB257955**

Component

Diesel Engine

PETRO CANADA DURON HP 15W40 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The condition of the oil is acceptable for the time in service.

iAL)				Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0081353		
Sample Date		Client Info		01 Aug 2023		
Machine Age	kms	Client Info		195280		
Oil Age	kms	Client Info		2126		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>127	95		
Chromium	ppm	ASTM D5185(m)	>3	<1		
Nickel	ppm	ASTM D5185(m)	>30	<1		
Titanium	ppm	ASTM D5185(m)	>2	0		
Silver	ppm	ASTM D5185(m)	>2	0		
Aluminum	ppm	ASTM D5185(m)	>59	5		
Lead	ppm	ASTM D5185(m)	>29	3		
Copper	ppm	ASTM D5185(m)	>135	2		
Tin	ppm	ASTM D5185(m)	>2	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	2		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)	60	62		
Manganese	ppm	ASTM D5185(m)	0	<1		
Magnesium	ppm	ASTM D5185(m)	1010	983		
Calcium	ppm	ASTM D5185(m)	1070	1057		
Phosphorus	ppm	ASTM D5185(m)	1150	1082		
Zinc	ppm	ASTM D5185(m)		1203		
Sulfur	ppm	ASTM D5185(m)	2060	2560		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>18	4		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.5		
Nitration	Abs/cm	ASTM D7624*	>20	11.4		
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.7		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.2		



OIL ANALYSIS REPORT

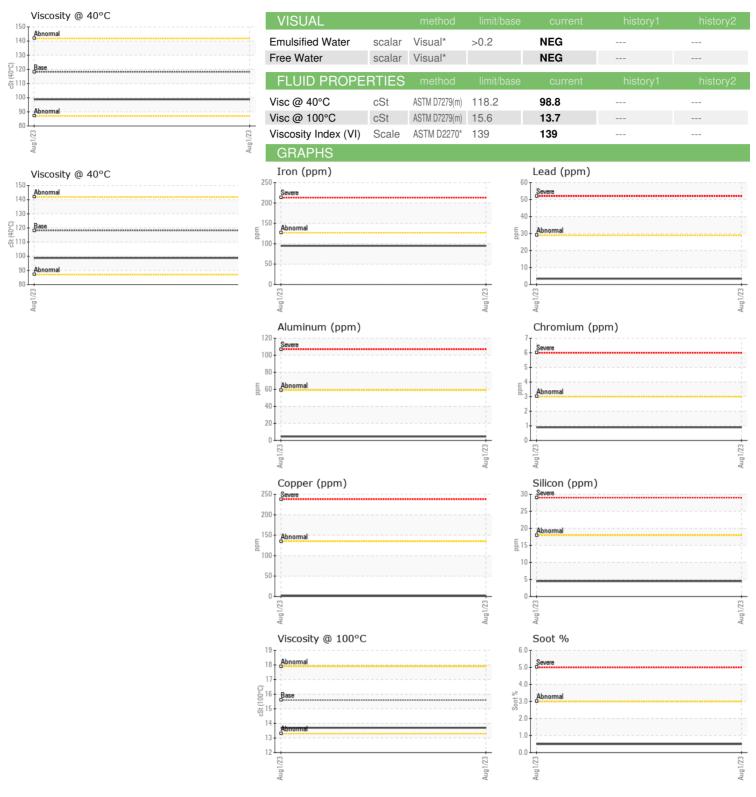



CALA ISO 17025:2017 Accredited

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PC0081353

: 02575823 : 5620874

Received : 15 Aug 2023 Diagnosed

: 15 Aug 2023 Diagnostician : Wes Davis

Test Package : MOB 1 (Additional Tests: KV40, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ICSB - Brantford 567 Oak Park Rd. Brantford, ON CA N3T 5L8 Contact: Doug Hall Djhall@sharpbus.com T: (519)751-3434