




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

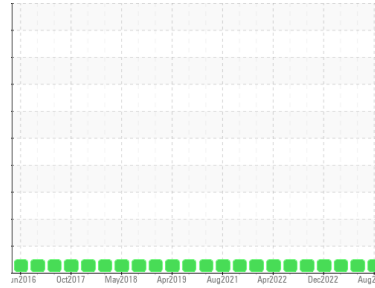

Machine Id  
**4514**

Component  
**Front Diesel Engine**

Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (37 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0084321</b>	GFL0070692	GFL0063760	
Sample Date	Client Info	<b>08 Aug 2023</b>	23 May 2023	06 Feb 2023	
Machine Age	hrs	Client Info	<b>22379</b>	0	21205
Oil Age	hrs	Client Info	<b>600</b>	0	486
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	<b>14</b>	8	13
Chromium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Silver	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >25	<b>4</b>	2	2
Lead	ppm ASTM D5185(m) >40	<b>2</b>	<1	<1
Copper	ppm ASTM D5185(m) >330	<b>1</b>	1	3
Tin	ppm ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Antimony	ppm ASTM D5185(m)	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 1	<b>2</b>	2	2
Barium	ppm ASTM D5185(m) 1	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m) 60	<b>59</b>	56	58
Manganese	ppm ASTM D5185(m) 1	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	<b>983</b>	936	945
Calcium	ppm ASTM D5185(m) 1070	<b>1076</b>	1092	1146
Phosphorus	ppm ASTM D5185(m) 1150	<b>1035</b>	1025	1089
Zinc	ppm ASTM D5185(m) 1270	<b>1198</b>	1153	1197
Sulfur	ppm ASTM D5185(m) 2060	<b>2415</b>	2459	2626
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	<b>7</b>	4	4
Sodium	ppm ASTM D5185(m)	<b>6</b>	4	4
Potassium	ppm ASTM D5185(m) >20	<b>5</b>	1	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.2</b>	0.1	0
Nitration	Abs/cm ASTM D7624* >20	<b>8.3</b>	7.7	7.5
Sulfation	Abs/.1mm ASTM D7415* >30	<b>21.1</b>	19.4	21.0



# OIL ANALYSIS REPORT







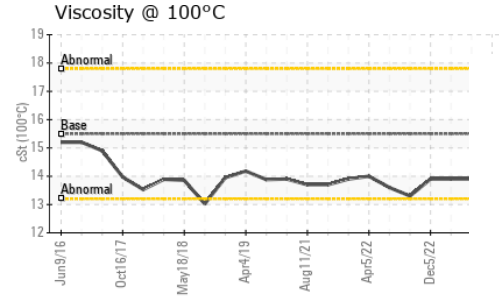
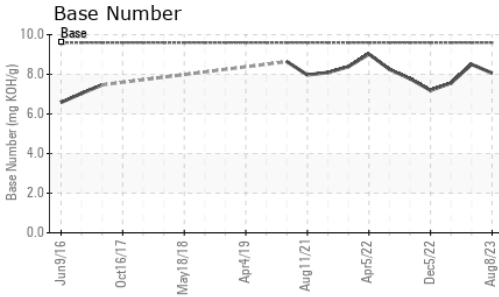


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.9</b>	16.0	15.9
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	<b>8.06</b>	8.50	7.56

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	<b>13.6</b>	13.9	13.9

## GRAPHS

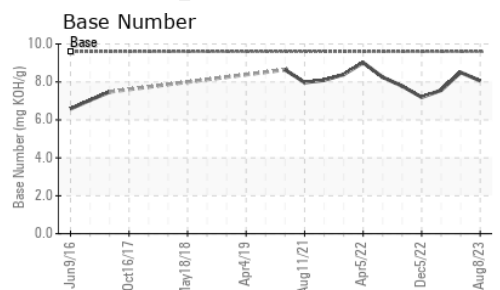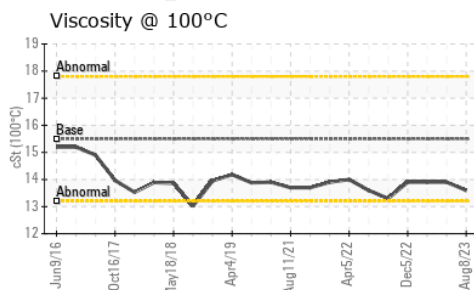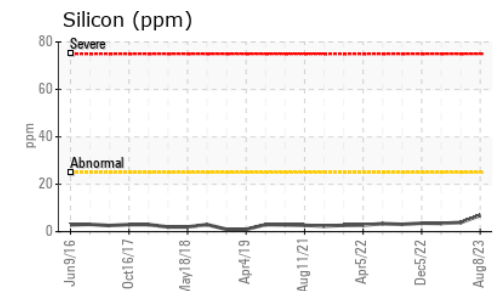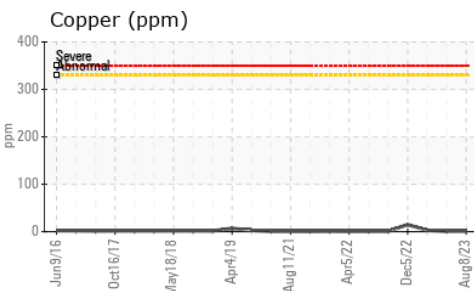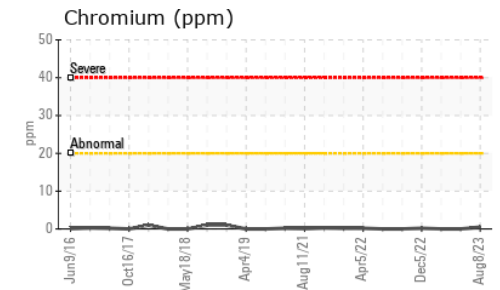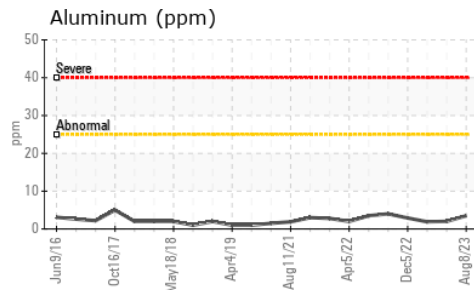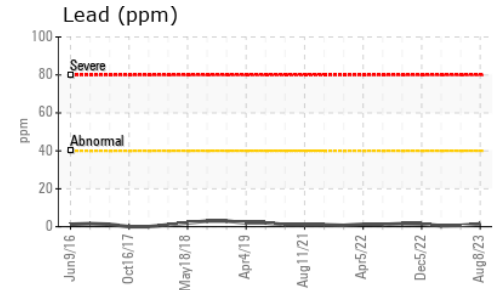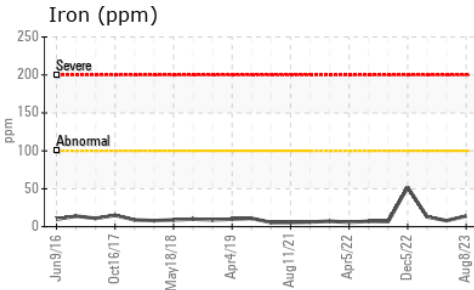

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County  
**Sample No.** : GFL0084321 **Received** : 15 Aug 2023  
**Lab Number** : **02575882** **Diagnosed** : 16 Aug 2023  
**Unique Number** : 5628942 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: GFL Calgary  
 calgarymaintenance@gflenv.com  
 T: (403)369-6163