


Area  
**Fwd Machinery Space [450183004]**  
Machine Id  
**Compressor No. 2 - Start Up Air Crank Case (S/N Sample Tag KB-63205B)**  
Component  
**Air Compressor**  
Fluid  
**COMPRO 100 (4 LTR)**

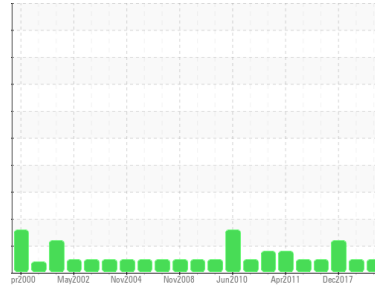

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
The water content is negligible. There is no indication of any contamination in the oil.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC</b>	PC0019452	PC
Sample Date	Client Info		<b>01 Aug 2023</b>	11 Dec 2019	02 Dec 2017
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

**WEAR METALS**

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>7</b>	0	0
Iron	ppm	ASTM D5185(m) >50	<b>17</b>	2	6
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >10	<b>2</b>	0	<1
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES**






	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185(m) 0	<b>2</b>	1	▲ 200
Phosphorus	ppm	ASTM D5185(m) 50	<b>32</b>	10	▲ 158
Zinc	ppm	ASTM D5185(m) 0	<b>3</b>	2	▲ 57
Sulfur	ppm	ASTM D5185(m) 1500	<b>2686</b>	2847	1469
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	0	0
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	1
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	<1	0
Water	%	ASTM D6304* >0.6	<b>0.002</b>	---	---
ppm Water	ppm	ASTM D6304* >6000	<b>19.0</b>	---	---

**FLUID DEGRADATION**


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.3	<b>0.11</b>	0.149	0.420

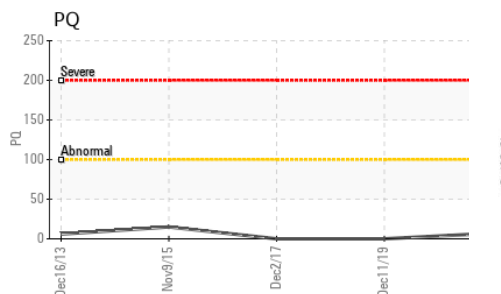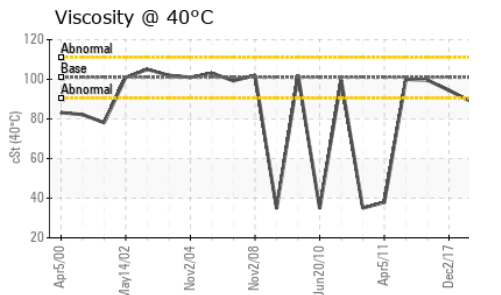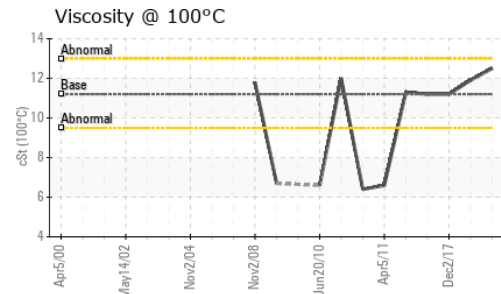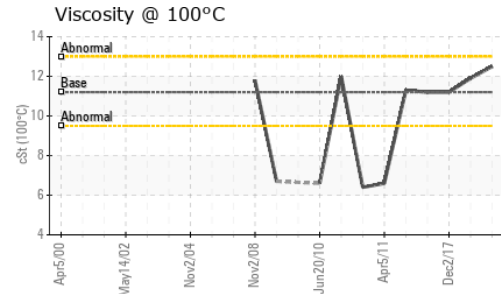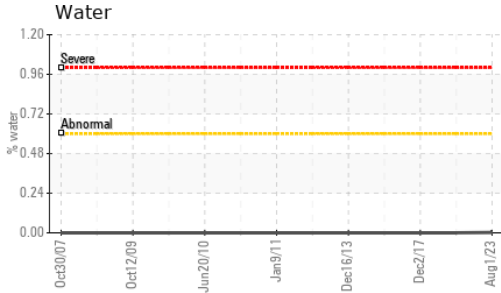






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	101.0	94.3	88.9
Visc @ 100°C	cSt	ASTM D7279(m)	11.2	12.5	11.9
Viscosity Index (VI)	Scale	ASTM D2270*	97	127	125

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

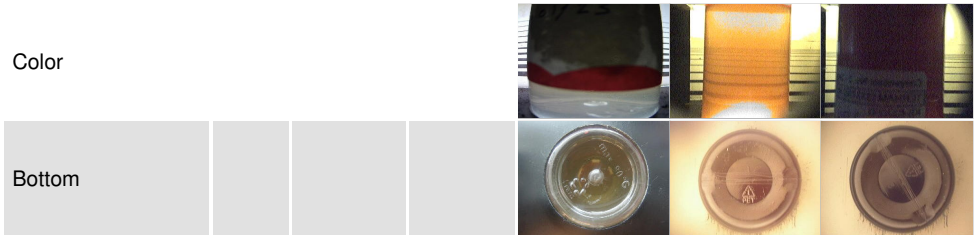

## GRAPHS

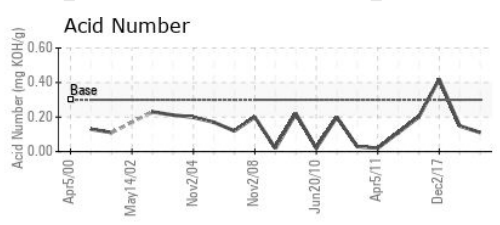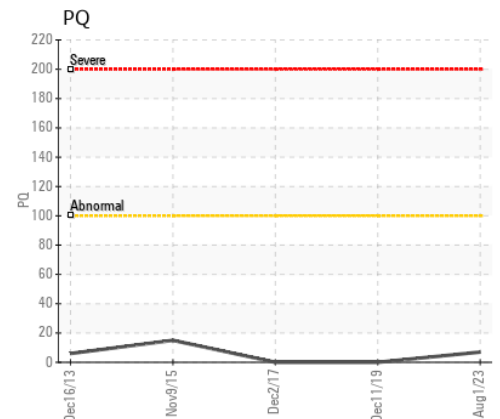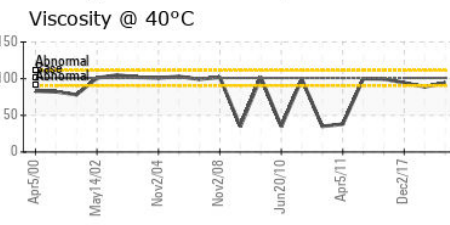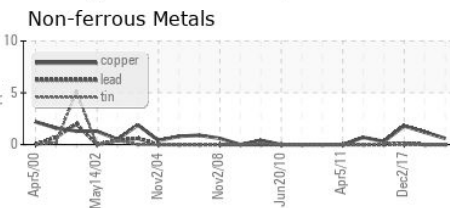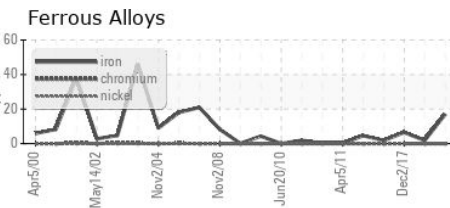

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC  
**Lab Number** : 02576441  
**Unique Number** : 5629501  
**Test Package** : MAR 2 ( Additional Tests: KF, KV100, TAN Man, VI )  
**Received** : 17 Aug 2023  
**Diagnosed** : 18 Aug 2023  
**Diagnostician** : Kevin Marson

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshhynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.