


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id 165172 DRIVE

Component

Gearbox

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jun2021	Aug ² 023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0070417	PC0043558	
Sample Date		Client Info		16 Aug 2023	16 Jun 2021	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	
Iron	ppm	ASTM D5185(m)	>200	2	1	
Chromium	ppm	ASTM D5185(m)	>15	0	0	
Nickel	ppm	ASTM D5185(m)	>15	0	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	
Lead	ppm	ASTM D5185(m)	>100	0	<1	
Copper	ppm	ASTM D5185(m)	>200	0	<1	
Tin	ppm	ASTM D5185(m)	>25	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	<1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	
Barium	ppm	ASTM D5185(m)		0	0	
Molybdenum	ppm	ASTM D5185(m)		0	0	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)		<1	<1	
Calcium	ppm	ASTM D5185(m)		<1	2	
Phosphorus	ppm	ASTM D5185(m)		7	6	
Zinc	ppm	ASTM D5185(m)		2	1	
Sulfur	ppm	ASTM D5185(m)		1091	2712	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	14	2	
Sodium	ppm	ASTM D5185(m)		0	<1	
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D974*

0.13

0.10



OIL ANALYSIS REPORT

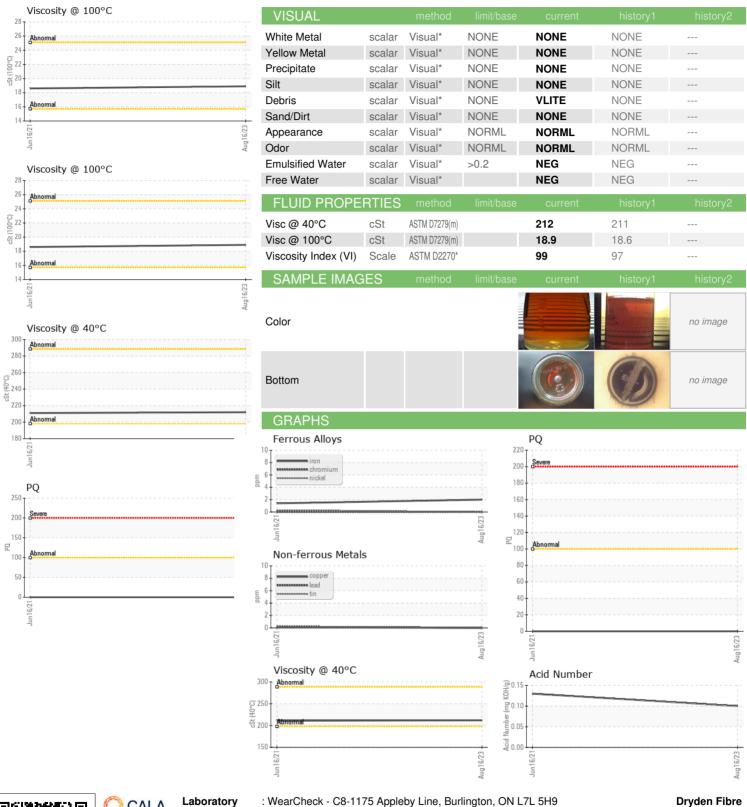



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PC0070417

: 02576565 : 5629625

Received Diagnosed

: 21 Aug 2023 : Wes Davis Diagnostician Test Package : IND 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.

: 17 Aug 2023

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Dryden Fibre

Box 3001, 1 Duke Street Dryden, ON **CA P8N 2Z7**

Contact: Yvon St. Laurent yvon.stlaurent@domtar.com

T: (807)223-9838 F: (807)223-9176