




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

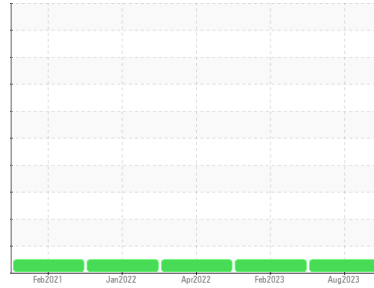

Machine Id  
**719001**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090624</b>	GFL0072819	GFL0039046
Sample Date	Client Info		<b>07 Aug 2023</b>	26 Feb 2023	28 Apr 2022
Machine Age	hrs	Client Info	<b>9078</b>	8022	5992
Oil Age	hrs	Client Info	<b>0</b>	0	1200
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	<b>17</b>	11	13
Chromium	ppm	ASTM D5185(m) >4	<b>2</b>	1	1
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m) >30	<b>6</b>	4	1
Copper	ppm	ASTM D5185(m) >35	<b>1</b>	1	<1
Tin	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	<b>7</b>	7	14
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>54</b>	55	51
Manganese	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 560	<b>591</b>	575	563
Calcium	ppm	ASTM D5185(m) 1510	<b>1681</b>	1721	1456
Phosphorus	ppm	ASTM D5185(m) 780	<b>764</b>	775	729
Zinc	ppm	ASTM D5185(m) 870	<b>924</b>	934	903
Sulfur	ppm	ASTM D5185(m) 2040	<b>2021</b>	2122	2006
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	<b>4</b>	4	5
Sodium	ppm	ASTM D5185(m)	<b>10</b>	10	7
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	4	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	<b>&gt;20</b>	7.0	11.2
Sulfation	Abs/.1mm	ASTM D7415*	<b>&gt;30</b>	18.9	22.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>&gt;25</b>	11.0	18.5












# OIL ANALYSIS REPORT

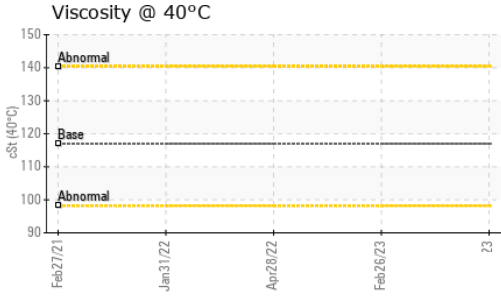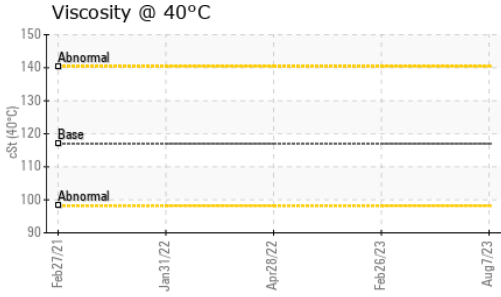

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	117.0	<b>118</b>	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	<b>14.9</b>	14.5
Viscosity Index (VI)	Scale	ASTM D2270*	134	<b>129</b>	---

## GRAPHS

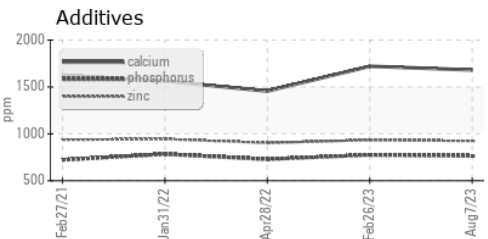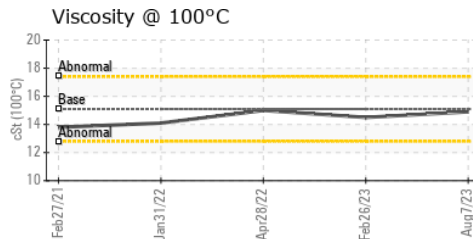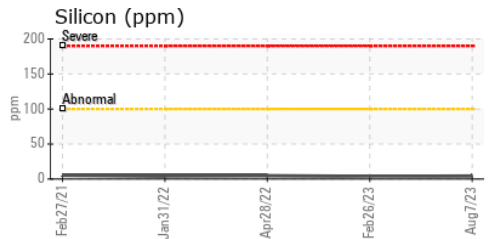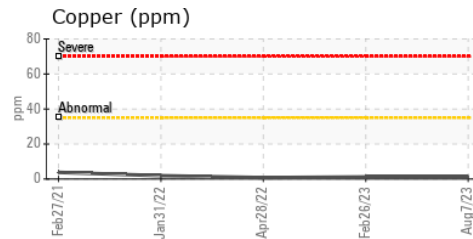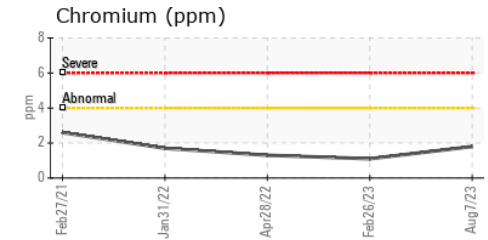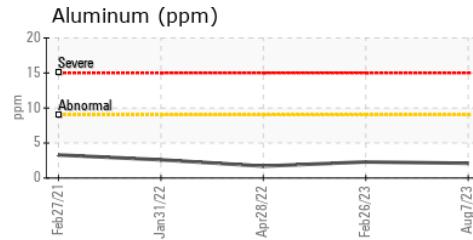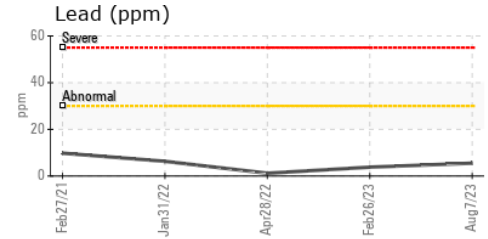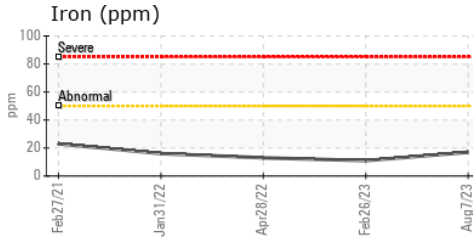

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW  
**Sample No.** : GFL0090624 **Received** : 21 Aug 2023  
**Lab Number** : 02577144 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 5630204 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: