


Machine Id
6024

Component
Rear Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (18 LTR)

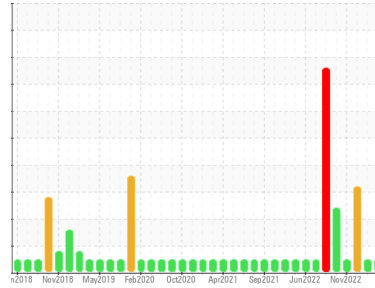

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0074401	PC0073965	PC0073533
Sample Date	Client Info		31 Jul 2023	12 Jun 2023	01 May 2023
Machine Age	kms	Client Info	0	0	0
Oil Age	kms	Client Info	9197	6905	8949
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>130	35	25	57
Chromium	ppm	ASTM D5185(m)	>10	3	4	▲ 11
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	4	4	▲ 12
Lead	ppm	ASTM D5185(m)	>20	0	0	2
Copper	ppm	ASTM D5185(m)	>125	15	14	70
Tin	ppm	ASTM D5185(m)	>4	<1	<1	3
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	2	2	4
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	59	59	58
Manganese	ppm	ASTM D5185(m)	0	<1	<1	2
Magnesium	ppm	ASTM D5185(m)	1010	967	987	921
Calcium	ppm	ASTM D5185(m)	1070	1024	1053	1100
Phosphorus	ppm	ASTM D5185(m)	1150	1032	1074	1041
Zinc	ppm	ASTM D5185(m)	1270	1182	1220	1186
Sulfur	ppm	ASTM D5185(m)	2060	2427	2572	2395
Lithium	ppm	ASTM D5185(m)		<1	<1	<1




CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	11	▲ 30
Sodium	ppm	ASTM D5185(m)		10	5	23
Potassium	ppm	ASTM D5185(m)	>20	5	<1	4

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0.9	0.3	0.5
Nitration	Abs/cm	ASTM D7624*	>20	7.7	7.0	8.7
Sulfation	Abs./1mm	ASTM D7415*	>30	20.9	19.6	20.7

OIL ANALYSIS REPORT






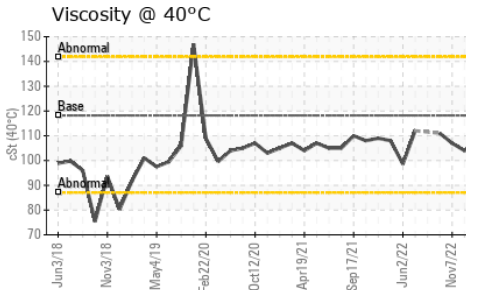
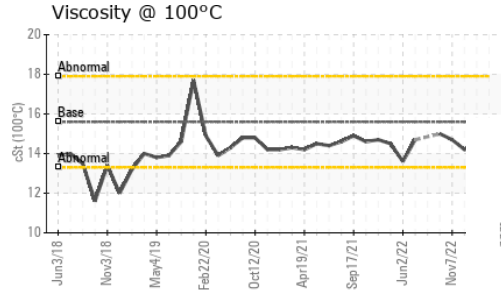
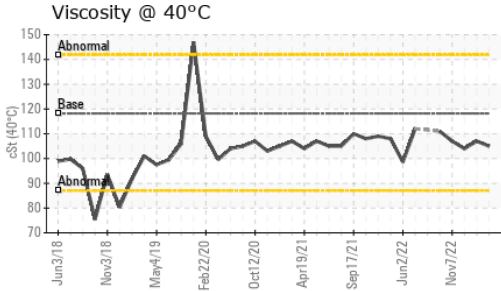


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.8	14.7	16.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	9.28	9.48	8.72

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	105	107	104
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.5	14.5	14.2
Viscosity Index (VI)	Scale	ASTM D2270*	139	142	139	139

GRAPHS

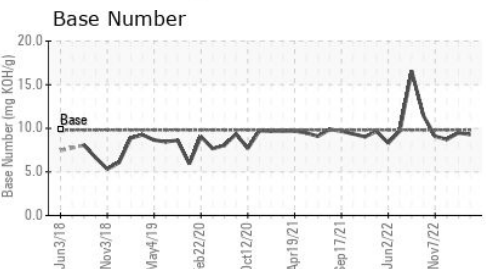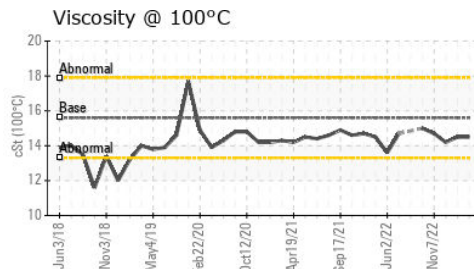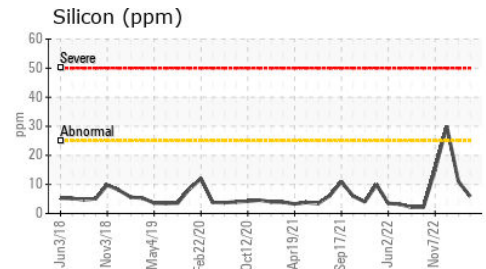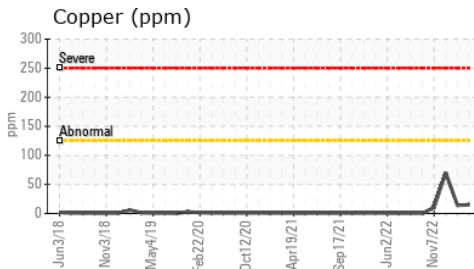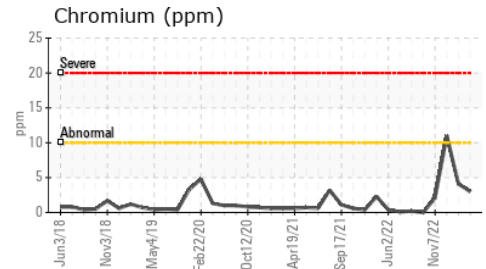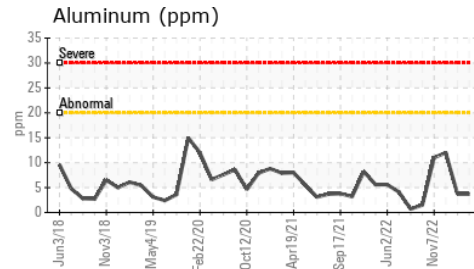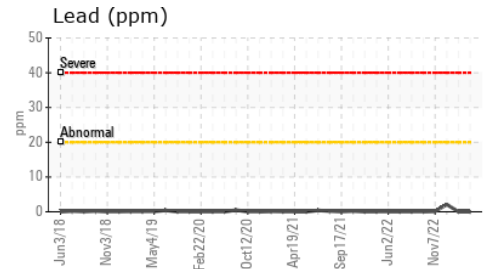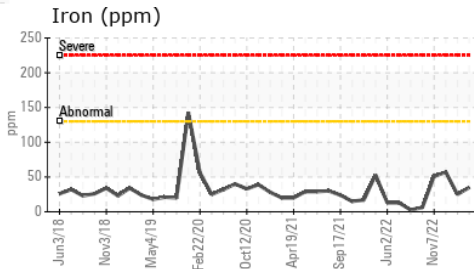

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0074401 **Received** : 22 Aug 2023
Lab Number : **02577338** **Diagnosed** : 22 Aug 2023
Unique Number : 5630398 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

TRANSDEV ST-JEAN
 720 TROTTER
 ST-JEAN-SUR-RICHELIEU, QC
 CA J3B 8T2
 Contact: Eric Breton
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: