


Machine Id  
**6002**

Component  
**Rear Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (21 LTR)**

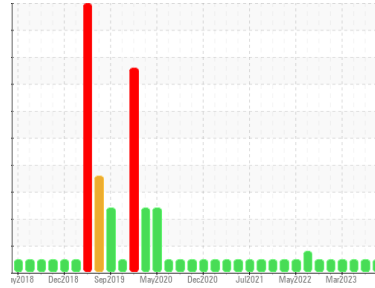

**DIAGNOSIS**

**Recommendation**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

**Wear**

Les taux d'usure de tous les composants sont normaux.

**Contamination**

Il n'y a aucun indice de contamination dans l'huile.

**Fluid Condition**

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0073440</b>	PC0073540	PC0063194
Sample Date	Client Info			<b>04 May 2023</b>	04 May 2023	20 Mar 2023
Machine Age	kms	Client Info		<b>0</b>	0	0
Oil Age	kms	Client Info		<b>5991</b>	7801	8847
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>130	<b>18</b>	19	20
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>8</b>	5	9
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>125	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	3	1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	59	62
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>987</b>	936	1000
Calcium	ppm	ASTM D5185(m)	1070	<b>1035</b>	1092	1124
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1068</b>	1068	1117
Zinc	ppm	ASTM D5185(m)	1270	<b>1209</b>	1202	1235
Sulfur	ppm	ASTM D5185(m)	2060	<b>2560</b>	2551	2585
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	4	3
Sodium	ppm	ASTM D5185(m)		<b>5</b>	4	2
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	2	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.4</b>	0.4	0.6
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.9</b>	8.2	9.2
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>21.0</b>	19.7	19.9

# OIL ANALYSIS REPORT






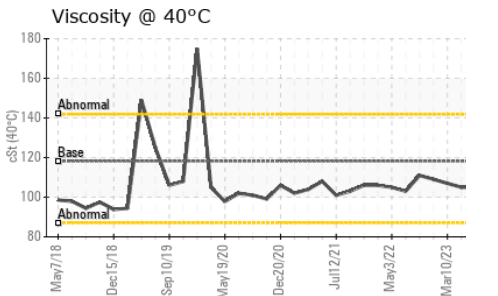
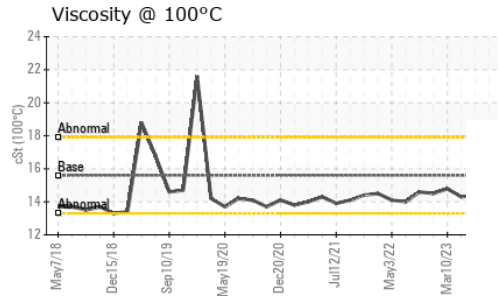
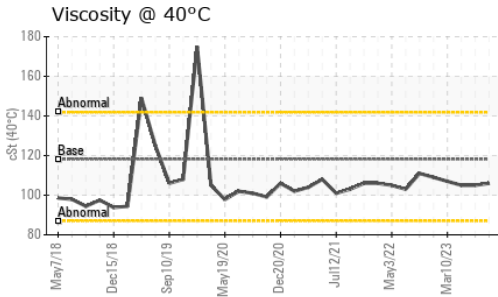


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.7</b>	15.5	16.3
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	<b>9.16</b>	8.94	8.83

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	<b>106</b>	105	105
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>14.5</b>	14.4	14.3
Viscosity Index (VI)	Scale	ASTM D2270*	139	<b>140</b>	140	139

## GRAPHS

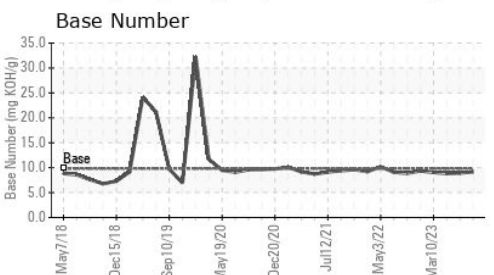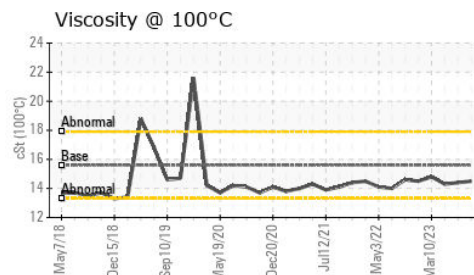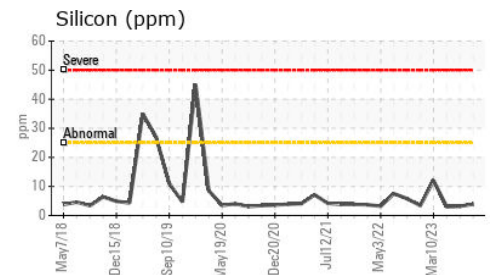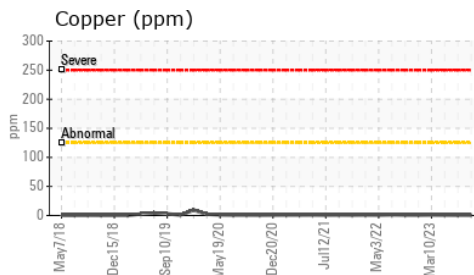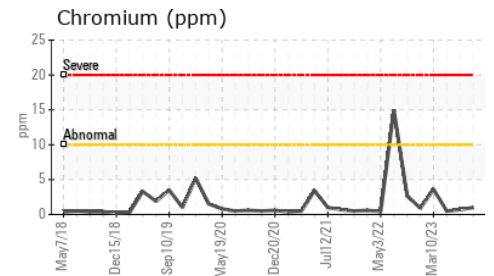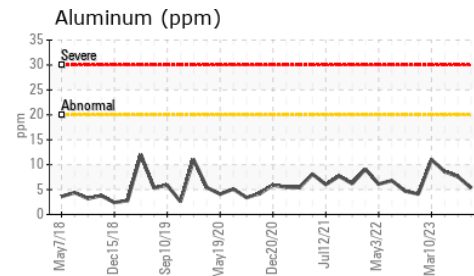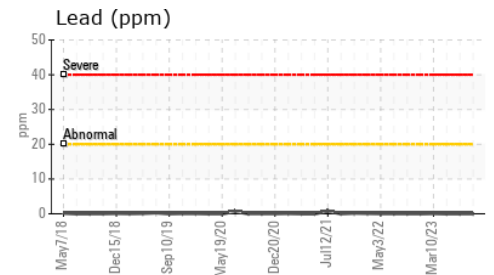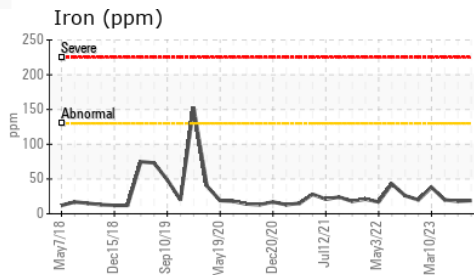

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0073440 **Received** : 22 Aug 2023  
**Lab Number** : **02577339** **Diagnosed** : 22 Aug 2023  
**Unique Number** : 5630399 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

**TRANSDEV ST-JEAN**  
 720 TROTTER  
 ST-JEAN-SUR-RICHELIEU, QC  
 CA J3B 8T2  
 Contact: Eric Breton  
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: