




OIL ANALYSIS REPORT

Sample Rating Trend

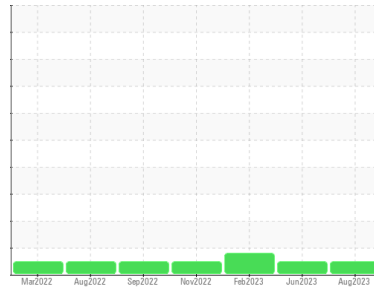

NORMAL



Machine Id
420061

Component
Diesel Engine

Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0084334	GFL0077586	GFL0070731	
Sample Date	Client Info	10 Aug 2023	29 Jun 2023	28 Feb 2023	
Machine Age	mls	Client Info	4440	3946	
Oil Age	mls	Client Info	98546	494	470
Oil Changed	Client Info	Changed	Changed	Changed	
Sample Status		NORMAL	NORMAL	MARGINAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	▲ 2.7
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	22	46	31
Chromium	ppm ASTM D5185(m) >20	<1	2	1
Nickel	ppm ASTM D5185(m) >4	<1	<1	<1
Titanium	ppm ASTM D5185(m)	0	0	<1
Silver	ppm ASTM D5185(m) >3	<1	<1	0
Aluminum	ppm ASTM D5185(m) >20	6	13	14
Lead	ppm ASTM D5185(m) >40	0	<1	0
Copper	ppm ASTM D5185(m) >330	3	7	2
Tin	ppm ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 1	2	2	2
Barium	ppm ASTM D5185(m) 1	0	0	0
Molybdenum	ppm ASTM D5185(m) 60	56	56	55
Manganese	ppm ASTM D5185(m) 1	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	920	910	876
Calcium	ppm ASTM D5185(m) 1070	986	990	1042
Phosphorus	ppm ASTM D5185(m) 1150	1002	980	1015
Zinc	ppm ASTM D5185(m) 1270	1128	1111	1082
Sulfur	ppm ASTM D5185(m) 2060	2418	2223	2332
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	7	7	4
Sodium	ppm ASTM D5185(m)	5	7	5
Potassium	ppm ASTM D5185(m) >20	9	17	17

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.4	0.8	0.5
Nitration	Abs/cm ASTM D7624* >20	8.0	10.8	10.5
Sulfation	Abs./1mm ASTM D7415* >30	21.4	23.0	23.5



OIL ANALYSIS REPORT







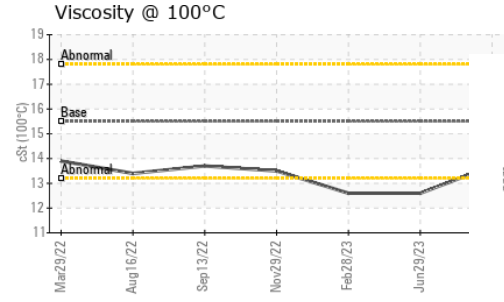
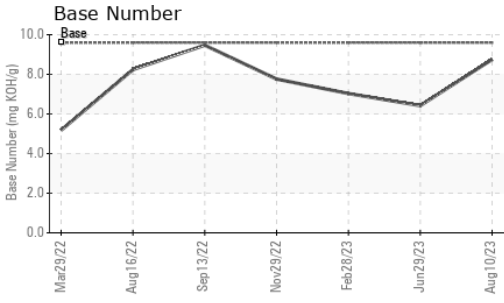


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.3	21.2	18.5
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	8.75	6.42	7.03

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	13.7	12.6	12.6

GRAPHS

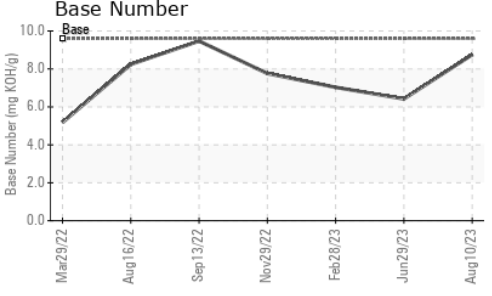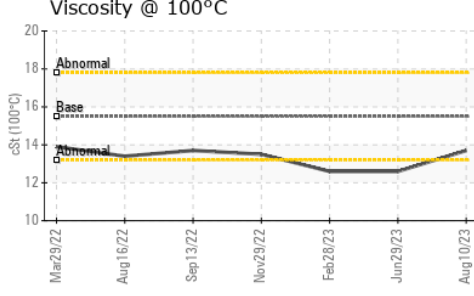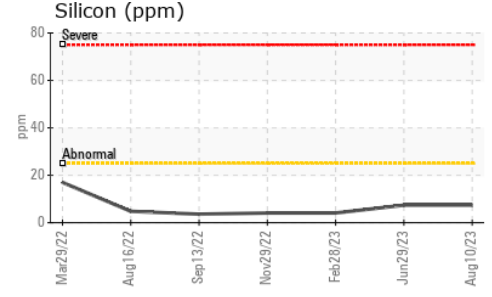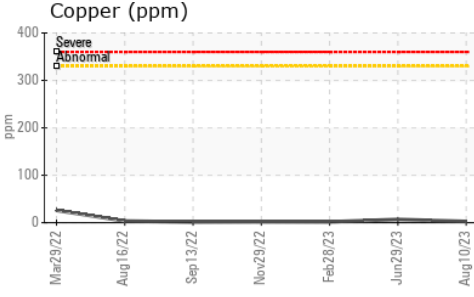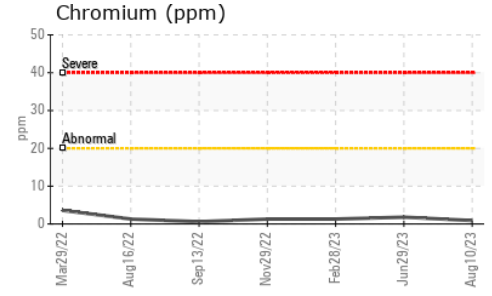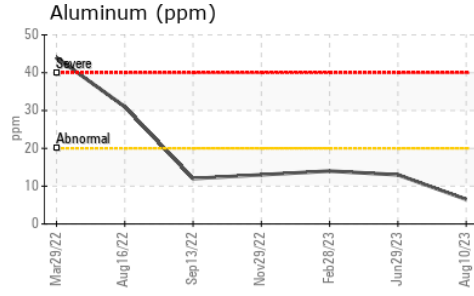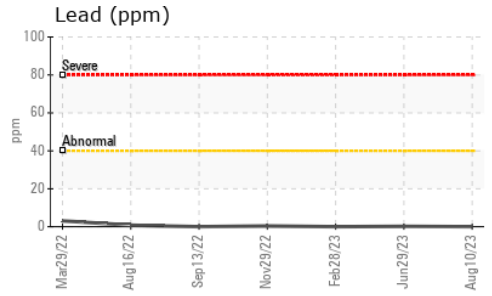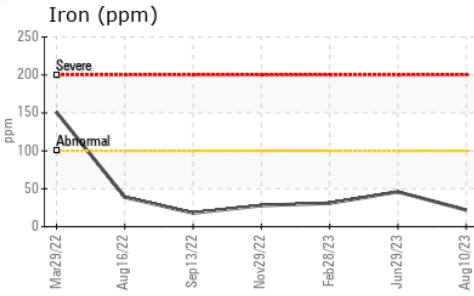

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County
Sample No. : GFL0084334 **Received** : 22 Aug 2023
Lab Number : 02577345 **Diagnosed** : 22 Aug 2023
Unique Number : 5630405 **Diagnostician** : Wes Davis
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: GFL Calgary
 calgarymaintenance@gflenv.com
 T: (403)369-6163