




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

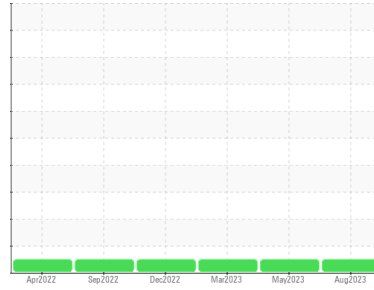

Machine Id  
**421051**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0084323</b>	GFL0077609	GFL0070738
Sample Date	Client Info		<b>14 Aug 2023</b>	25 May 2023	07 Mar 2023
Machine Age	kms	Client Info	<b>107850</b>	95344	2641
Oil Age	kms	Client Info	<b>0</b>	0	382
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	<b>9</b>	9	9
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>3</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>150	<b>1</b>	1	1
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>58</b>	57	56
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>955</b>	928	925
Calcium	ppm	ASTM D5185(m)	1070	<b>1033</b>	1082	1156
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1038</b>	1067	1091
Zinc	ppm	ASTM D5185(m)	1270	<b>1170</b>	1155	1174
Sulfur	ppm	ASTM D5185(m)	2060	<b>2556</b>	2581	2674
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>3</b>	3	2
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	1	<1

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.7</b>	6.7	6.6
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>19.8</b>	19.1	21.5



# OIL ANALYSIS REPORT







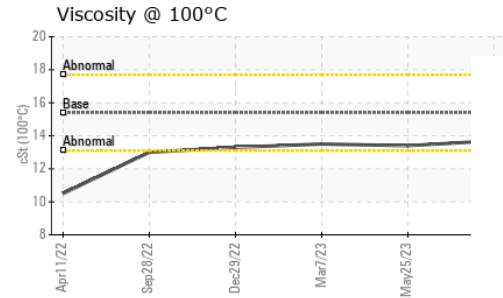
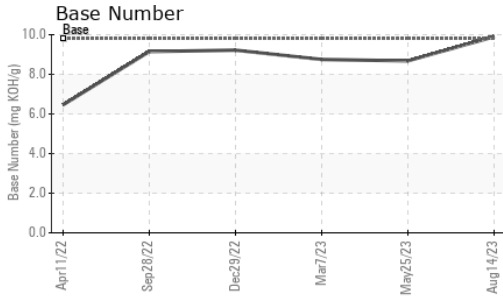


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.5</b>	15.0	15.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	<b>9.90</b>	8.68	8.75

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.7</b>	13.4	13.5

## GRAPHS

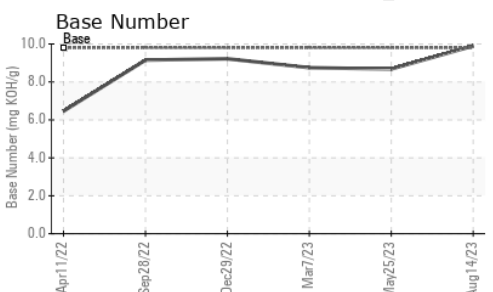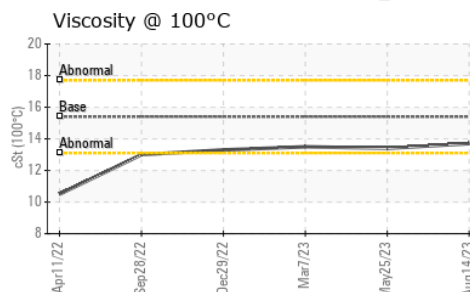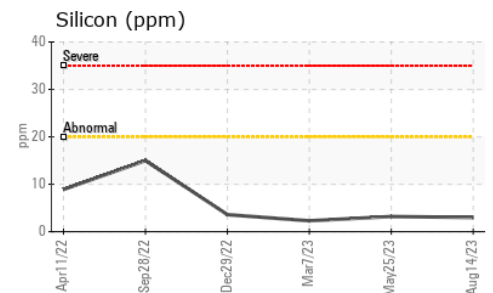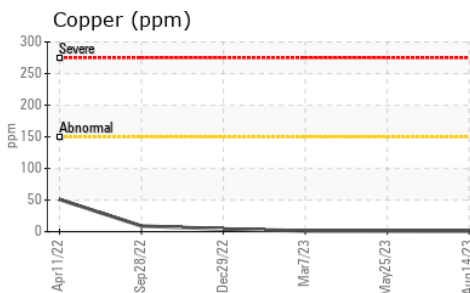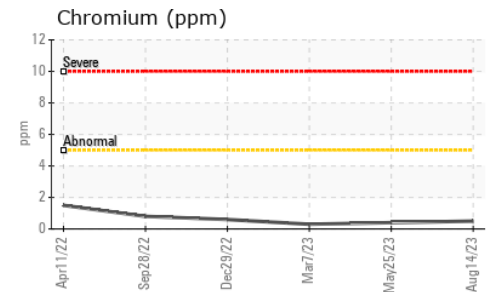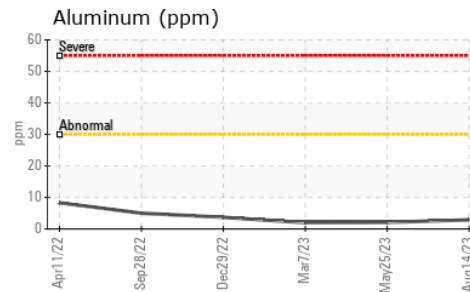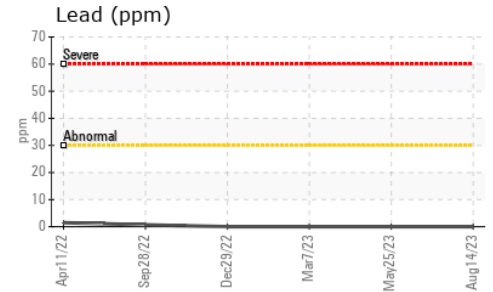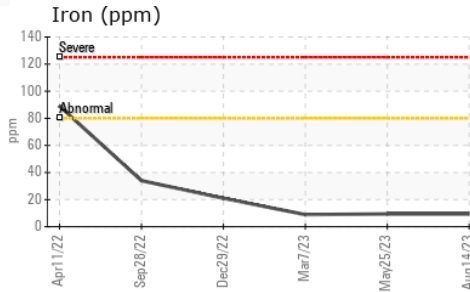

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County  
**Sample No.** : GFL0084323 **Received** : 22 Aug 2023 220 Carmek Blvd  
**Lab Number** : 02577351 **Diagnosed** : 23 Aug 2023 Rocky View County, AB  
**Unique Number** : 5630411 **Diagnostician** : Wes Davis CA T1X 1X1  
**Test Package** : MOB 2 Contact: GFL Calgary calgarymaintenance@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

F: (403)369-6163