


Machine Id  
**300977 E-12**

Component  
**Front Diesel Engine**

Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS 15W40 (18 LTR)**

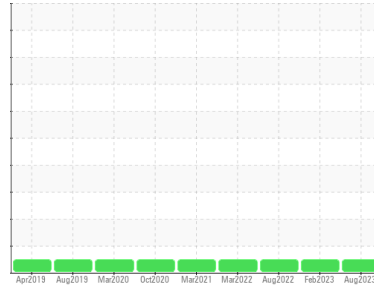

**DIAGNOSIS**

**Recommendation**  
Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078190</b>	PC0054286	PC0050435
Sample Date	Client Info			<b>22 Aug 2023</b>	08 Feb 2023	10 Aug 2022
Machine Age	kms	Client Info		<b>0</b>	85344	76621
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>15</b>	14	23
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>4</b>	3	4
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	4	5
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1.4	<b>1</b>	2	1
Barium	ppm	ASTM D5185(m)	0.1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0.1	<b>59</b>	61	62
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	2.7	<b>997</b>	980	1028
Calcium	ppm	ASTM D5185(m)	2328	<b>1057</b>	1107	1137
Phosphorus	ppm	ASTM D5185(m)	924	<b>1045</b>	1058	1018
Zinc	ppm	ASTM D5185(m)	1004	<b>1219</b>	1211	1272
Sulfur	ppm	ASTM D5185(m)	3828	<b>2461</b>	2551	2552
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	4	5
Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.9</b>	0.5	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.0</b>	7.3	9.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.4</b>	20.9	23.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.4</b>	13.7	17.3











# OIL ANALYSIS REPORT

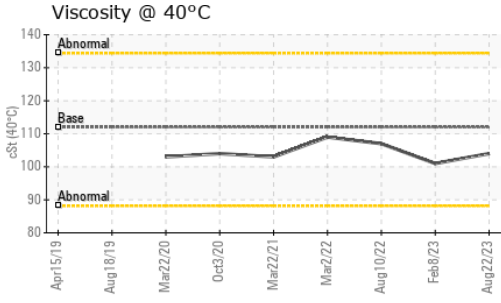

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	112	<b>104</b>	101
Visc @ 100°C	cSt	ASTM D7279(m)	15.3	<b>14.2</b>	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	143	<b>139</b>	136

## GRAPHS

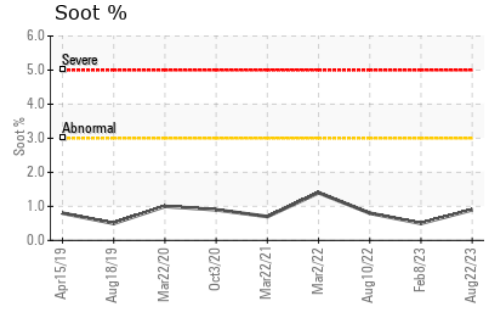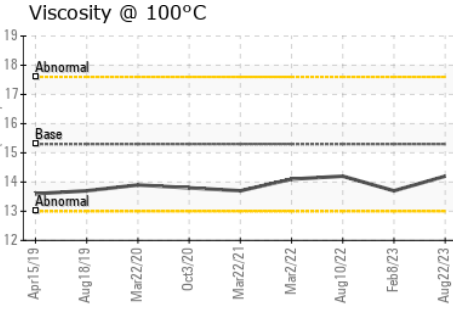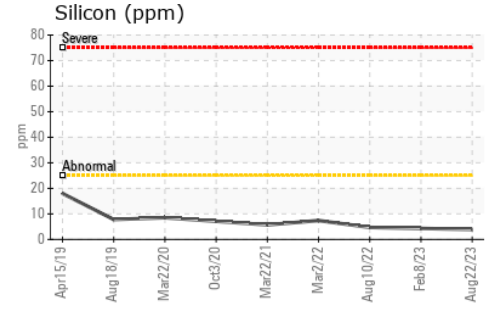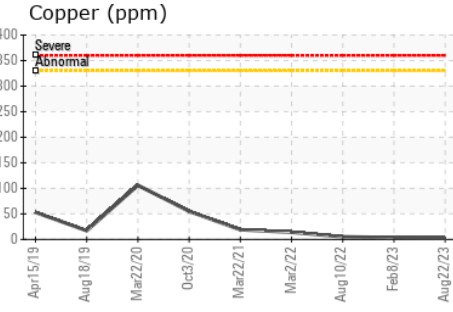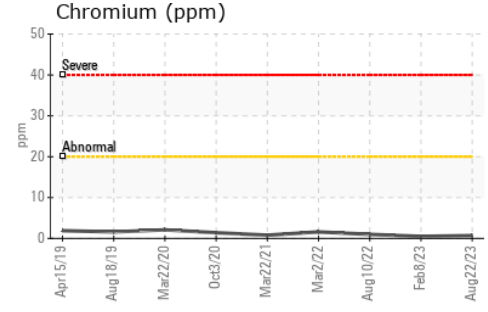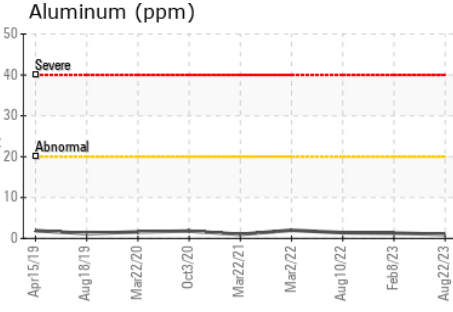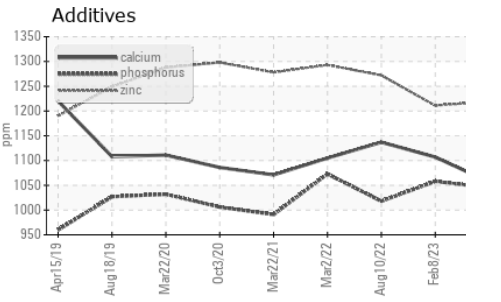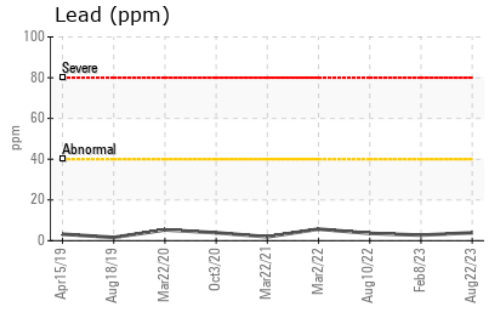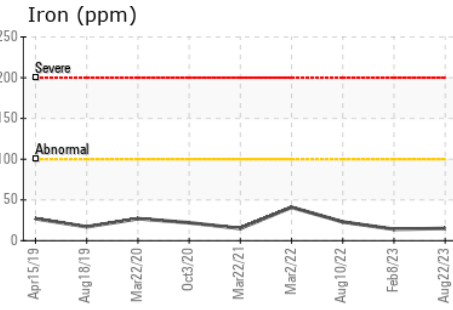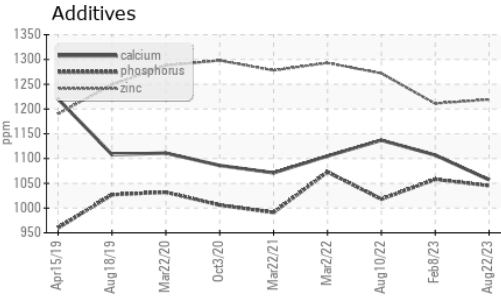

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0078190 **Received** : 23 Aug 2023  
**Lab Number** : **02577684** **Diagnosed** : 23 Aug 2023  
**Unique Number** : 5630744 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**HAMILTON FIRE DEPT**  
 MECHANICAL DIV., 177 BAY STREET NORTH  
 HAMILTON, ON  
 CA L8R 2P8  
 Contact: Jenny-Lynn Pellegrino  
 jenny-lynn.pellegrino@hamilton.ca  
 T: (905)546-2424  
 F: (905)961-9116

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.