


Machine Id
SMEAL 300642 L-42

Component
Front Diesel Engine

Fluid
SAFETY-KLEEN PERFORMANCE PLUS 15W40 (42 LTR)

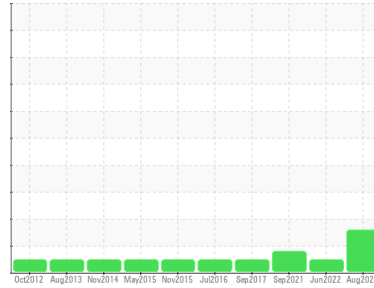

DIAGNOSIS

Recommendation
We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill.

Wear
All component wear rates are normal.

Contamination
Light fuel dilution occurring. Light concentration of carbon/soot present in the oil. No other contaminants were detected in the oil.

Fluid Condition
Additive levels indicate the addition of a different brand, or type of oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0078202	PC0050445	PC0050408
Sample Date	Client Info	22 Aug 2023	16 Jun 2022	23 Sep 2021
Machine Age	kms	0	0	123372
Oil Age	kms	0	0	7000
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >200	20	12	33
Chromium	ppm	ASTM D5185(m) >20	1	<1	2
Nickel	ppm	ASTM D5185(m) >2	0	0	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >30	1	1	1
Lead	ppm	ASTM D5185(m) >30	3	2	4
Copper	ppm	ASTM D5185(m) >30	2	1	3
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 1.4	4	2	2
Barium	ppm	ASTM D5185(m) 0.1	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0.1	57	59	58
Manganese	ppm	ASTM D5185(m)	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 2.7	918	1000	966
Calcium	ppm	ASTM D5185(m) 2328	1129	1021	1026
Phosphorus	ppm	ASTM D5185(m) 924	1070	1074	980
Zinc	ppm	ASTM D5185(m) 1004	1198	1199	1164
Sulfur	ppm	ASTM D5185(m) 3828	2653	2616	2486
Lithium	ppm	ASTM D5185(m)	<1	0	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >30	6	4	6
Sodium	ppm	ASTM D5185(m)	4	1	2
Potassium	ppm	ASTM D5185(m) >20	<1	0	<1
Fuel	%	ASTM D7593* >3.0	▲ 1.8	<1.0	0.8


INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	▲ 3.3	1.5	▲ 4.9
Nitration	Abs/cm	ASTM D7624* >20	11.3	7.8	20.2
Sulfation	Abs/.1mm	ASTM D7415* >30	26.9	22.5	35.0

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	16.4	14.1	39.3













OIL ANALYSIS REPORT

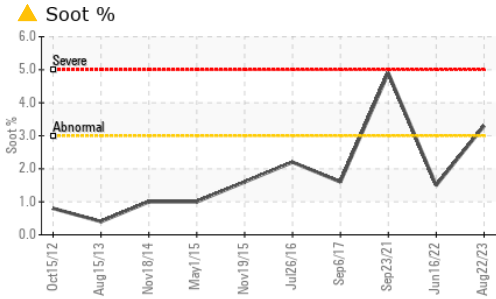

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	112	105	113
Visc @ 100°C	cSt	ASTM D7279(m)	15.3	14.2	15.3
Viscosity Index (VI)	Scale	ASTM D2270*	143	137	141

GRAPHS

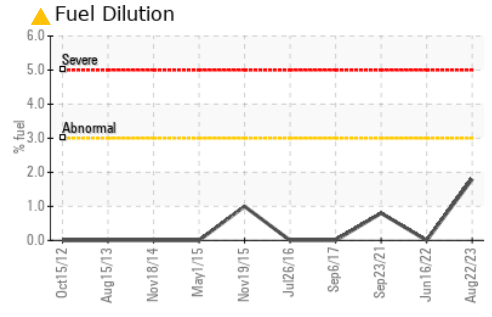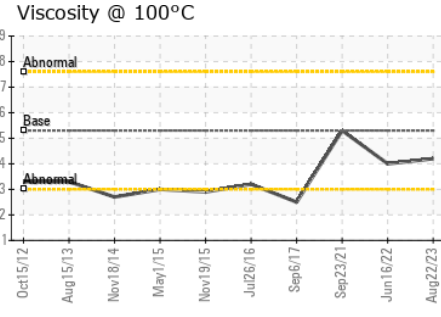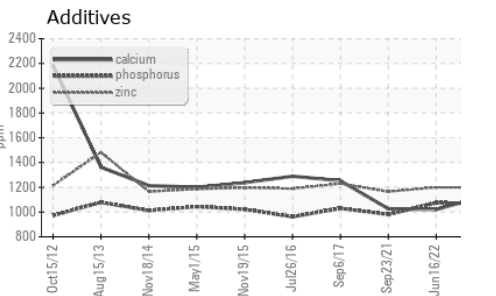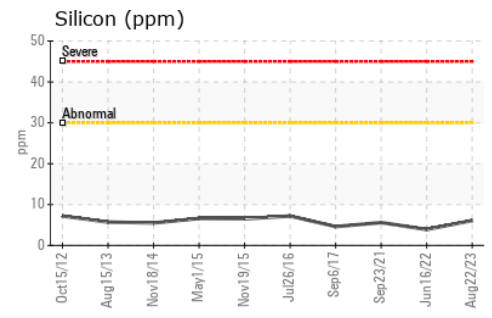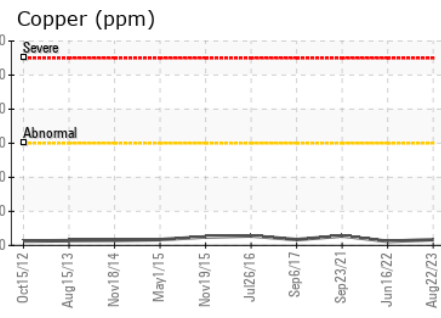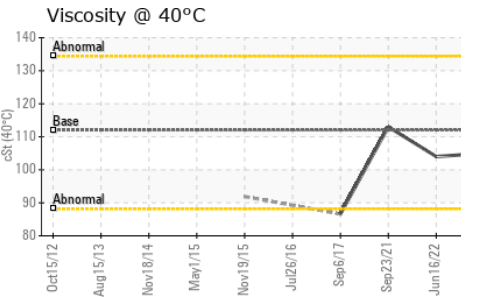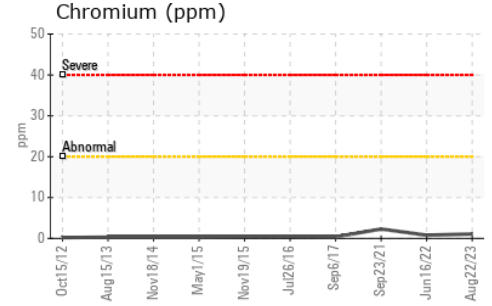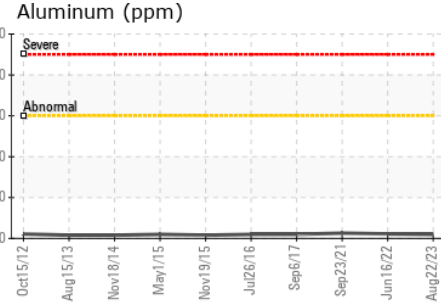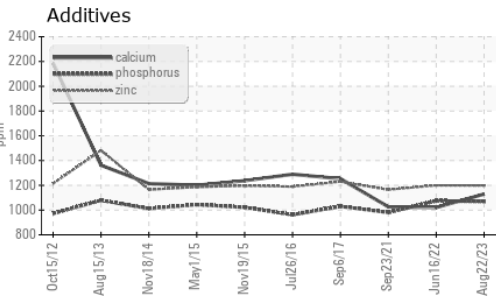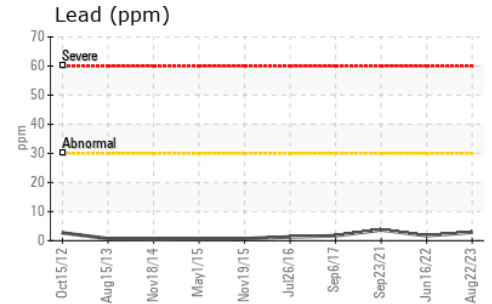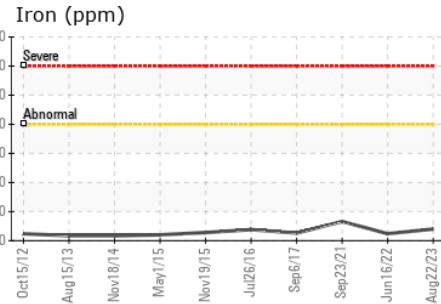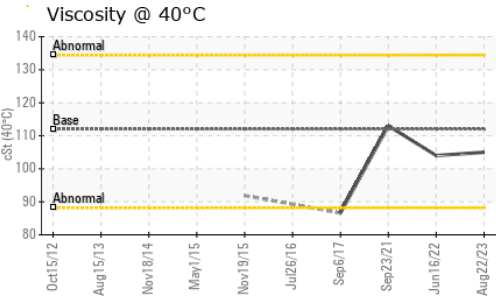

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078202 **Received** : 23 Aug 2023
Lab Number : 02577685 **Diagnosed** : 24 Aug 2023
Unique Number : 5630745 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

HAMILTON FIRE DEPT
 MECHANICAL DIV., 177 BAY STREET NORTH
 HAMILTON, ON
 CA L8R 2P8
 Contact: Jenny-Lynn Pellegrino
 jenny-lynn.pellegrino@hamilton.ca
 T: (905)546-2424
 F: (905)961-9116

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.