


# OIL ANALYSIS REPORT

Area  
**TEAM 15**  
Machine Id  
**150145**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX AW 46 (400 GAL)**

Sample Rating Trend

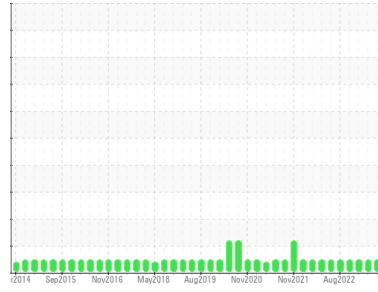

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the component(unconfirmed).

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0074837</b>	PC0074773	PC0070328
Sample Date	Client Info		<b>21 Aug 2023</b>	25 May 2023	31 Jan 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>4</b>	5	4
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0


## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>4</b>	4	4
Calcium	ppm	ASTM D5185(m) 50	<b>67</b>	71	72
Phosphorus	ppm	ASTM D5185(m) 330	<b>362</b>	369	371
Zinc	ppm	ASTM D5185(m) 430	<b>440</b>	421	433
Sulfur	ppm	ASTM D5185(m) 760	<b>1893</b>	1979	2006
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	<b>5</b>	6	5
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

# OIL ANALYSIS REPORT

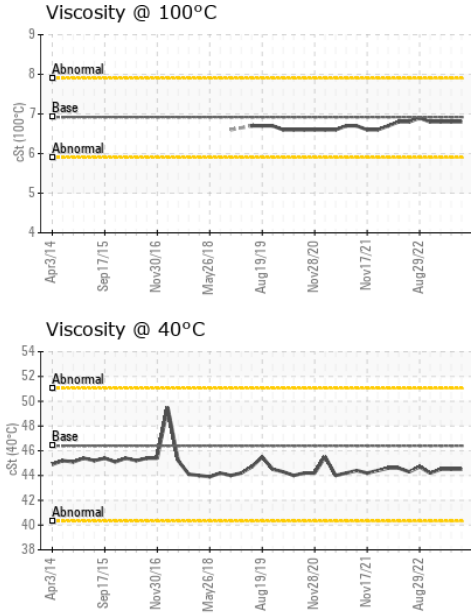


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	44.5	44.5
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	6.8	6.8
Viscosity Index (VI)	Scale	ASTM D2270*	104	107	107

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

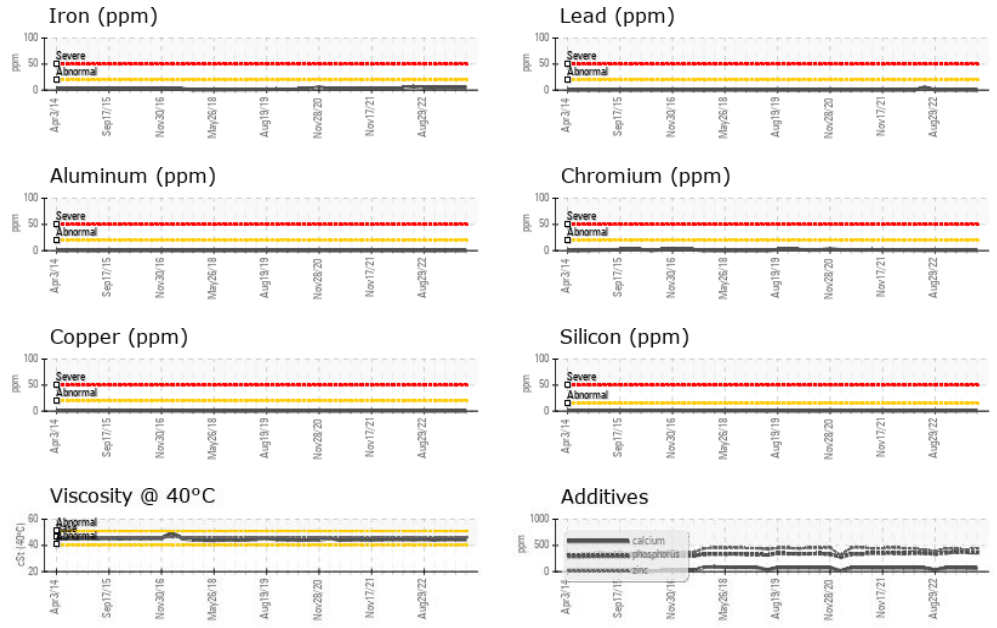

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0074837 **Received** : 24 Aug 2023  
**Lab Number** : **02578100** **Tested** : 25 Aug 2023  
**Unique Number** : 5631160 **Diagnosed** : 25 Aug 2023 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**Dryden Fibre**  
 Box 3001, 1 Duke Street  
 Dryden, ON  
 CA P8N 2Z7  
 Contact: Adebukola Adekanye  
 aadekanye@drydenfibre.ca  
 T: (807)223-9950  
 F: (807)223-9176

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.