


Machine Id
JOHN DEERE NO UNIT PC0071733
Component
Diesel Engine
Fluid
ESSO 15W40 (--- GAL)

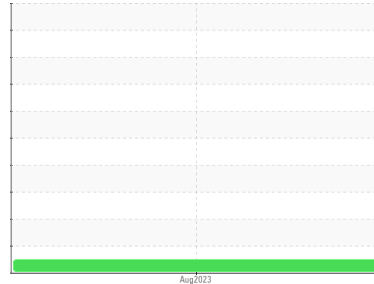

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
Metal levels are typical for a new component breaking in.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PC0071733	---	---
Sample Date	Client Info	21 Aug 2023	---	---
Machine Age	kms Client Info	8941	---	---
Oil Age	kms Client Info	213	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>2.1	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>51	17	---	---
Chromium	ppm	ASTM D5185(m)	>11	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>31	2	---	---
Lead	ppm	ASTM D5185(m)	>26	1	---	---
Copper	ppm	ASTM D5185(m)	>26	1	---	---
Tin	ppm	ASTM D5185(m)	>4	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		60	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		922	---	---
Calcium	ppm	ASTM D5185(m)		1979	---	---
Phosphorus	ppm	ASTM D5185(m)		1083	---	---
Zinc	ppm	ASTM D5185(m)		1205	---	---
Sulfur	ppm	ASTM D5185(m)		3240	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>22	4	---	---
Sodium	ppm	ASTM D5185(m)	>31	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---



INFRA-RED method limit/base current history1 history2

Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.3	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	---	---

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	ASTM D7414*	>25	14.7	---	---
-----------	----------	-------------	-----	-------------	-----	-----









OIL ANALYSIS REPORT

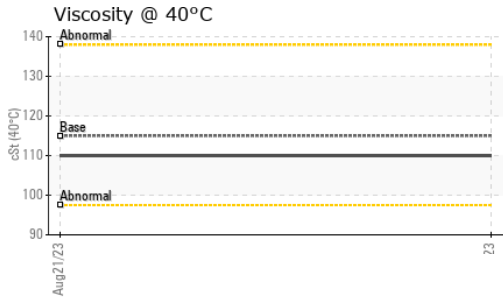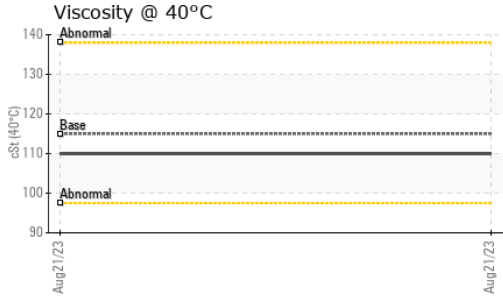

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.21	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	110	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.5	---
Viscosity Index (VI)	Scale	ASTM D2270*		134	---

GRAPHS

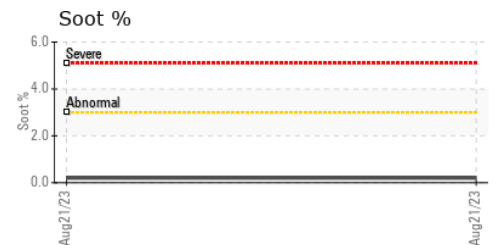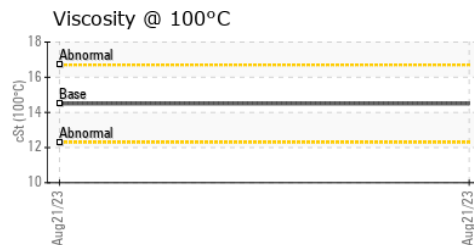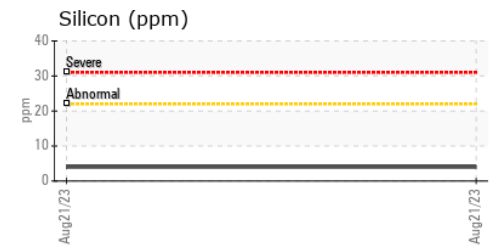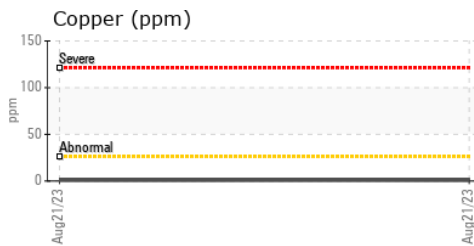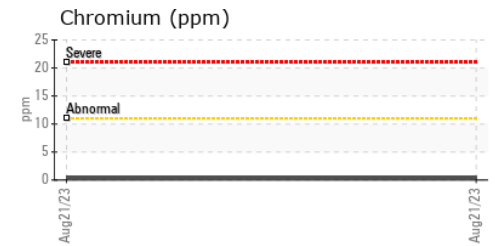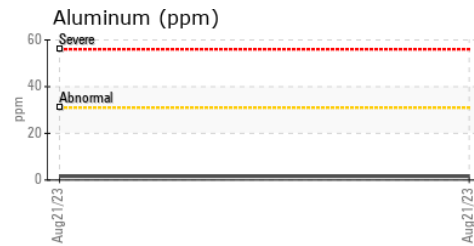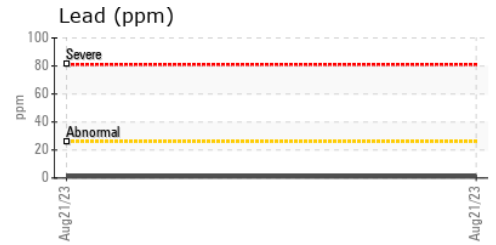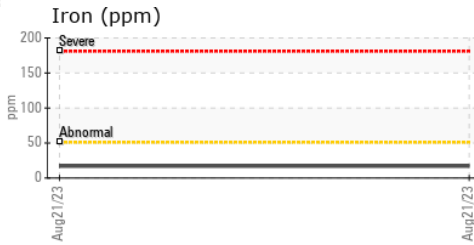

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0071733 **Received** : 24 Aug 2023
Lab Number : **02578294** **Diagnosed** : 25 Aug 2023
Unique Number : 5631354 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

BOB LUNN
 6812 LAMBTON LINE
 BOTHWELL, ON
 CA N0P 1C0
 Contact: Bob Lunn
 bobdanellelunn@gmail.com
 T: (519)695-5320
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.