



Machine Id  
**ACCURPRESS 00123**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (35 GAL)**

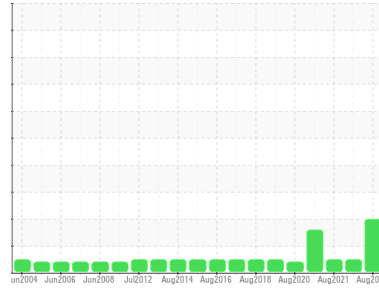

**COMPONENT CONDITION SUMMARY**

▲ Particle Trend

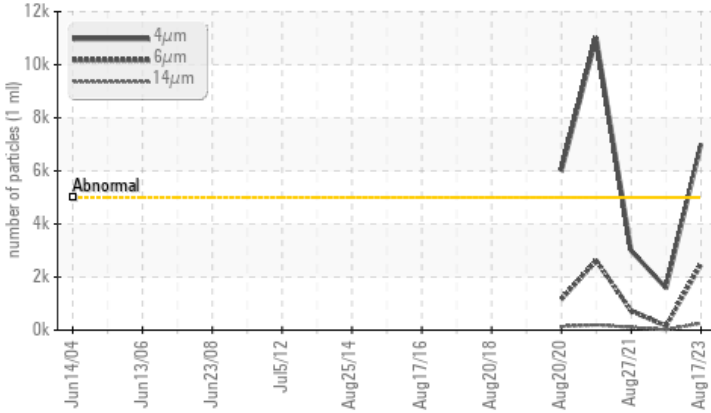

**RECOMMENDATION**

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

**PROBLEMATIC TEST RESULTS**

Sample Status			ATTENTION	NORMAL	NORMAL
Particles >4µm	ASTM D7647	>5000	▲ <b>7012</b>	1585	2991
Particles >6µm	ASTM D7647	>1300	▲ <b>2472</b>	161	730
Particles >14µm	ASTM D7647	>160	▲ <b>266</b>	15	105
Particles >21µm	ASTM D7647	>40	▲ <b>69</b>	6	33
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>20/18/15</b>	18/15/11	19/17/14

Customer Id: TRI123WIN  
Sample No.: PC0076085  
Lab Number: 02578303  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

## HISTORICAL DIAGNOSIS

### 08 Aug 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 27 Aug 2021 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 10 Aug 2021 Diag: Wes Davis

ISO




We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. Particles >4µm are abnormally high. Particles >6µm are abnormally high. Particles >14µm are notably high. Particles >21µm are notably high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report





Machine Id  
**ACCURPRESS 00123**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (35 GAL)**

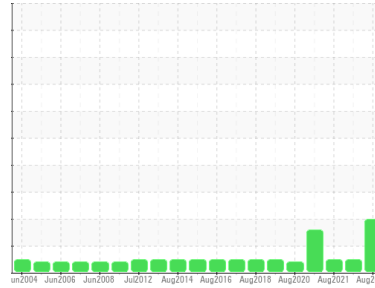

## DIAGNOSIS

**Recommendation**  
We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is a light amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0076085</b>	PC267830	PC267825
Sample Date	Client Info		<b>17 Aug 2023</b>	08 Aug 2022	27 Aug 2021
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<1	<1	<1
Chromium	ppm	ASTM D5185(m) >10	0	0	<1
Nickel	ppm	ASTM D5185(m) >10	0	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	<1
Aluminum	ppm	ASTM D5185(m) >10	<1	<1	0
Lead	ppm	ASTM D5185(m) >10	0	<1	<1
Copper	ppm	ASTM D5185(m) >75	1	<1	6
Tin	ppm	ASTM D5185(m) >10	0	0	<1
Antimony	ppm	ASTM D5185(m)	<1	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	<1	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<1	0	<1
Barium	ppm	ASTM D5185(m) 5	0	0	0
Molybdenum	ppm	ASTM D5185(m) 5	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m) 25	<1	<1	3
Calcium	ppm	ASTM D5185(m) 200	59	61	120
Phosphorus	ppm	ASTM D5185(m) 300	335	314	260
Zinc	ppm	ASTM D5185(m) 370	403	395	317
Sulfur	ppm	ASTM D5185(m) 2500	717	734	654
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	1	5	<1
Sodium	ppm	ASTM D5185(m)	0	0	0
Potassium	ppm	ASTM D5185(m) >20	<1	0	<1






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ <b>7012</b>	1585	2991
Particles >6µm	ASTM D7647	>1300	▲ <b>2472</b>	161	730
Particles >14µm	ASTM D7647	>160	▲ <b>266</b>	15	105
Particles >21µm	ASTM D7647	>40	▲ <b>69</b>	6	33
Particles >38µm	ASTM D7647	>10	2	0	2
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>20/18/15</b>	18/15/11	19/17/14

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.57	<b>0.36</b>	0.38	0.25

# OIL ANALYSIS REPORT

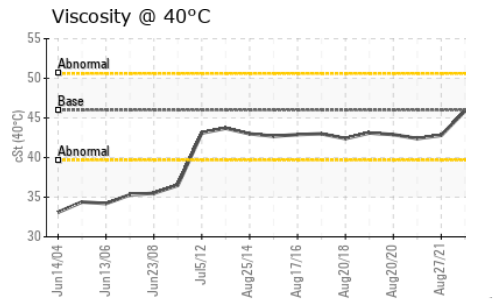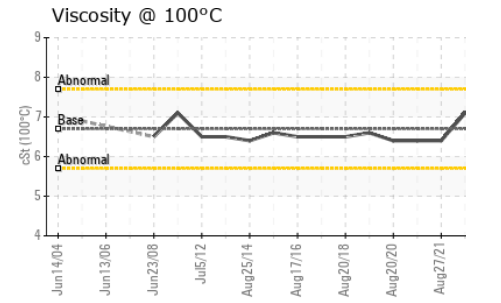
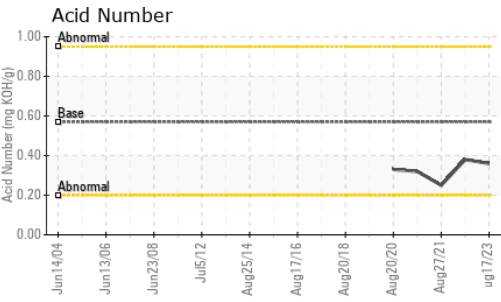
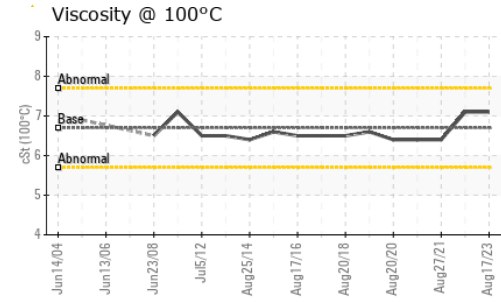
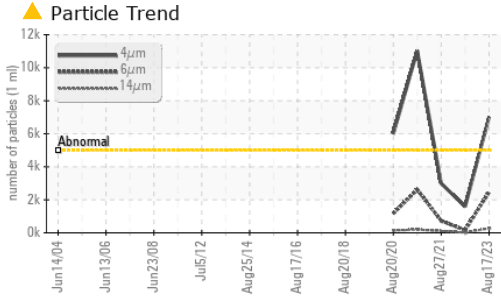


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D2729(m)	46	45.9	42.8
Visc @ 100°C	cSt	ASTM D2729(m)	6.7	7.1	6.4
Viscosity Index (VI)	Scale	ASTM D2270*	97	113	97

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

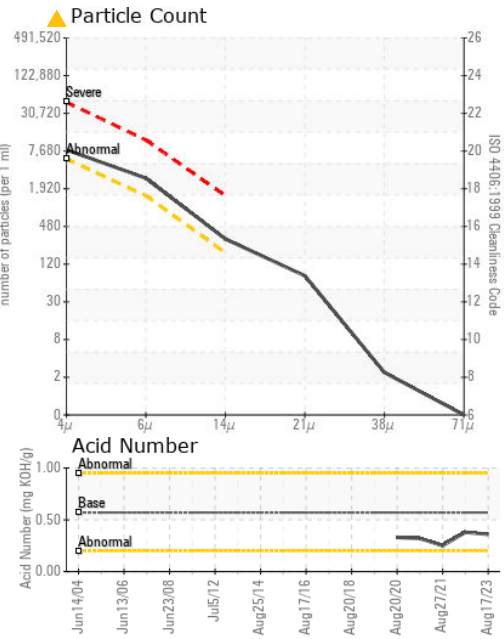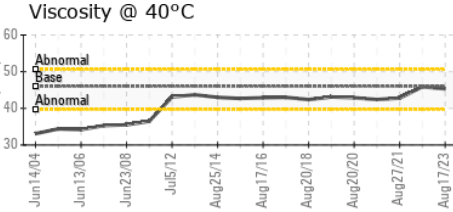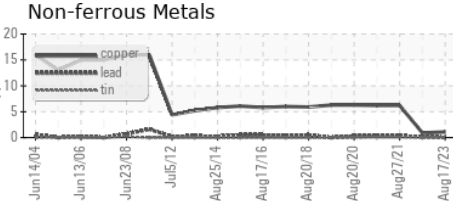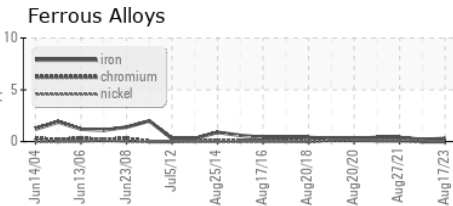

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0076085 **Received** : 24 Aug 2023  
**Lab Number** : 02578303 **Diagnosed** : 28 Aug 2023  
**Unique Number** : 5631363 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

**TRIPLE E RV**  
 BOX # 1230  
 WINKLER, MB  
 CA R6W 4C4  
 Contact: Bob Friesen  
 maintenance@tripleerv.com  
 T: (204)325-4361  
 F: (204)325-5241

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.