


# PROBLEM SUMMARY

Area  
**1460**  
Machine Id  
**1460-5411-4077 - COPPER CONCENTRATE THICKENER U/F PUMP**  
Component  
**Pump**  
Fluid  
**PETRO CANADA SYNDURO SHB ISO 68 (20 Oz)**

Sample Rating Trend

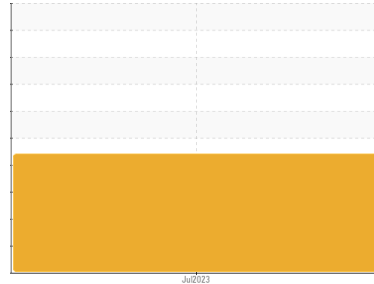


**VISUAL METAL**



## COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

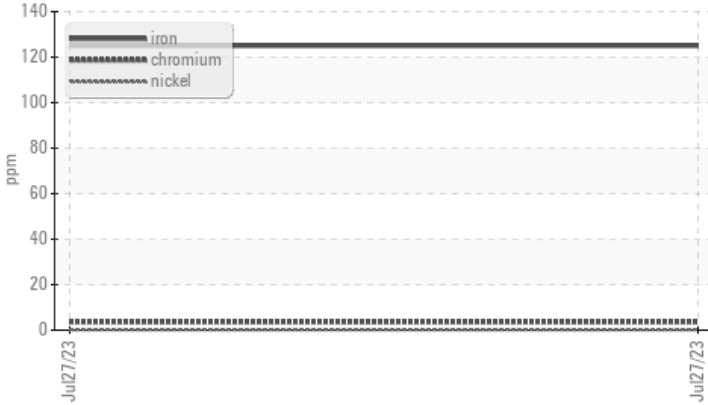

▲ Additives




## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185(m)	>90	▲ 125	---	---
Titanium	ppm	ASTM D5185(m)	>3	▲ 5	---	---
Calcium	ppm	ASTM D5185(m)	5.0	▲ 106	---	---
Phosphorus	ppm	ASTM D5185(m)	100	▲ 472	---	---
Zinc	ppm	ASTM D5185(m)	5.0	▲ 40	---	---
Lithium	ppm	ASTM D5185(m)		▲ 40	---	---
White Metal	scalar	Visual*	NONE	▲ LIGHT	---	---

PrtFilter



no image

no image

Customer Id: INCVOS  
Sample No.: PC0077341  
Lab Number: 02578555  
Test Package: IND 3



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.
Check For Visual Metal	---	---	?	We advise that you check for visible metal particles in the oil.

## HISTORICAL DIAGNOSIS

Area  
**1460**  
Machine Id  
**1460-5411-4077 - COPPER CONCENTRATE THICKENER U/F PUMP**  
Component  
**Pump**  
Fluid  
**PETRO CANADA SYNDURO SHB ISO 68 (20 Oz)**



**DIAGNOSIS**

**Recommendation**  
We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

**Wear**  
Iron and titanium ppm levels are abnormal. Light concentration of visible metal present. Bearing and/or gear wear is indicated. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

**Contamination**  
Lithium (Li) level abnormal at 40ppm., indicates possible grease contamination.

**Fluid Condition**  
Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0077341</b>	---	---
Sample Date	Client Info	<b>27 Jul 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

**WEAR METALS**

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	---	---
Iron	ppm ASTM D5185(m) >90	<b>▲ 125</b>	---	---
Chromium	ppm ASTM D5185(m) >5	<b>4</b>	---	---
Nickel	ppm ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185(m) >3	<b>▲ 5</b>	---	---
Silver	ppm ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185(m) >7	<b>2</b>	---	---
Lead	ppm ASTM D5185(m) >12	<b>0</b>	---	---
Copper	ppm ASTM D5185(m) >30	<b>&lt;1</b>	---	---
Tin	ppm ASTM D5185(m) >9	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

**ADDITIVES**


method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>2</b>	---	---
Barium	ppm ASTM D5185(m) 5.0	<b>2</b>	---	---
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm ASTM D5185(m)	<b>3</b>	---	---
Magnesium	ppm ASTM D5185(m) 5.0	<b>2</b>	---	---
Calcium	ppm ASTM D5185(m) 5.0	<b>▲ 106</b>	---	---
Phosphorus	ppm ASTM D5185(m) 100	<b>▲ 472</b>	---	---
Zinc	ppm ASTM D5185(m) 5.0	<b>▲ 40</b>	---	---
Sulfur	ppm ASTM D5185(m) 1900	<b>1461</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>▲ 40</b>	---	---

**CONTAMINANTS**




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >60	<b>3</b>	---	---
Sodium	ppm ASTM D5185(m)	<b>4</b>	---	---
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	---	---

**FLUID CLEANLINESS**

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>370616</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>57969</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>2560</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>394</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>3</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>26/23/19</b>	---	---

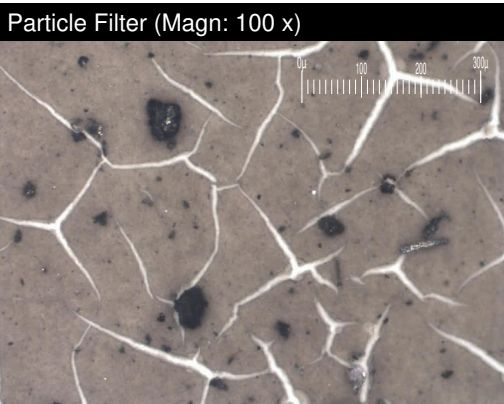

# OIL ANALYSIS REPORT

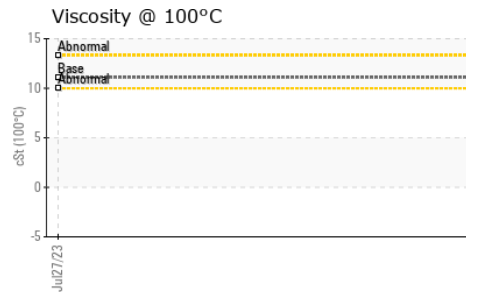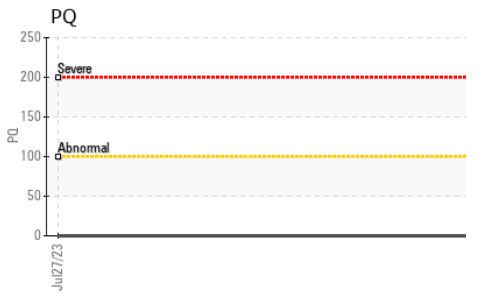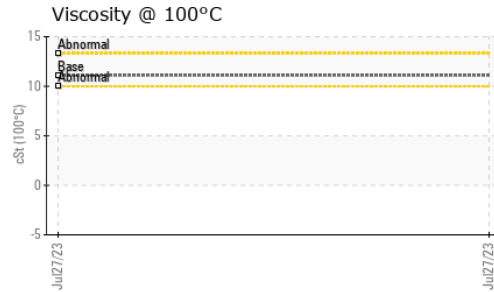






FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.3	<b>0.40</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	▲ <b>LIGHT</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*		<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

## SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

## GRAPHS

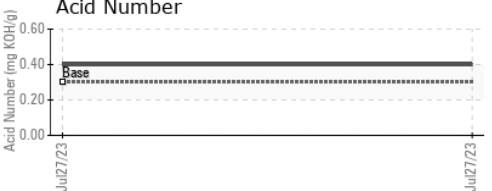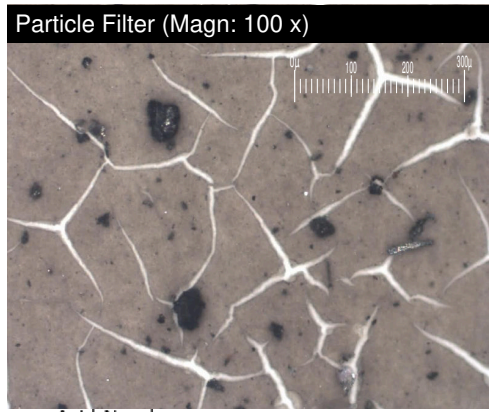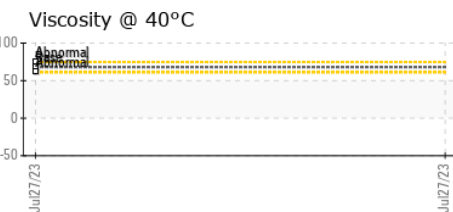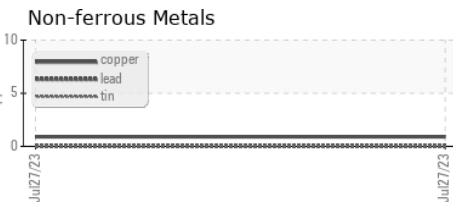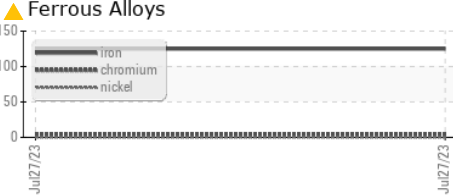

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0077341  
**Lab Number** : 02578555  
**Unique Number** : 5631615  
**Test Package** : IND 3 ( Additional Tests: Bottom, BottomAnalysis, FilterPatch, KV100, PrtCount, PrtFilter, TAN Man )

**Vale - Voisey's Bay**  
 Voisey's Bay Mine Site, P.O. Box 7001, Stn. C Happy Valley  
 Goose Bay, NL  
 CA A0P 1C0  
 Contact: Robert Feltham  
 robert.feltham@vale.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: x