



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

Machine Id
KUBOTA R420 OR88
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 20 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0082111	---	---
Sample Date	Client Info	09 May 2023	---	---
Machine Age	hrs	Client Info	4321	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>20	3	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Copper	ppm	ASTM D5185(m)	>75	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	0	38	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	37	---	---
Manganese	ppm	ASTM D5185(m)	1	<1	---	---
Magnesium	ppm	ASTM D5185(m)	0	537	---	---
Calcium	ppm	ASTM D5185(m)	50	1436	---	---
Phosphorus	ppm	ASTM D5185(m)	330	875	---	---
Zinc	ppm	ASTM D5185(m)	430	962	---	---
Sulfur	ppm	ASTM D5185(m)	760	2357	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS





method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>20	4	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>5000	▲ 21934	---	---
Particles >6µm	ASTM D7647	>1300	▲ 5466	---	---
Particles >14µm	ASTM D7647	>160	▲ 746	---	---
Particles >21µm	ASTM D7647	>40	▲ 241	---	---
Particles >38µm	ASTM D7647	>10	12	---	---
Particles >71µm	ASTM D7647	>3	2	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/17	---	---



OIL ANALYSIS REPORT

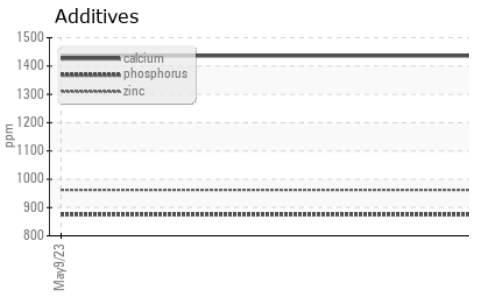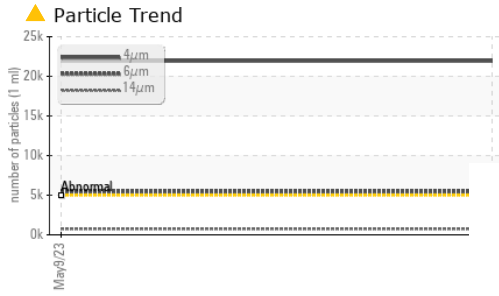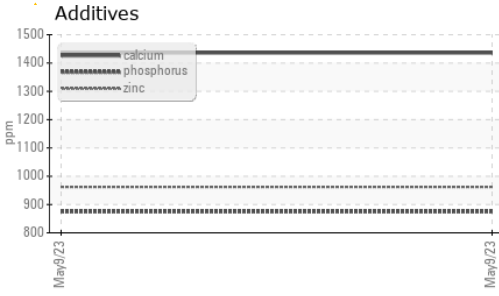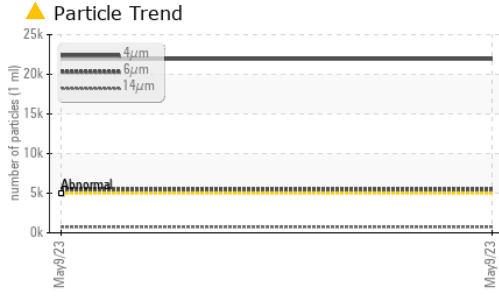





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.9 ▲ 61.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

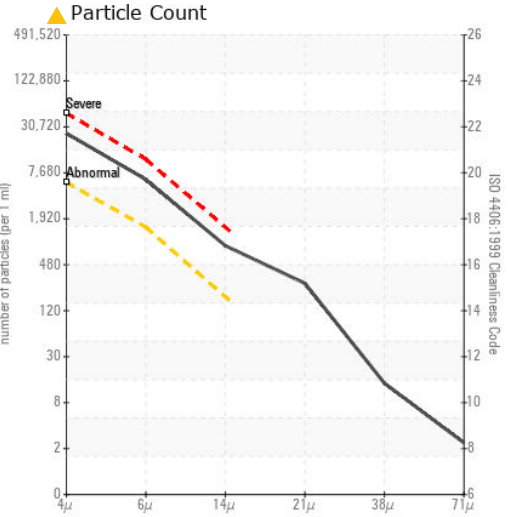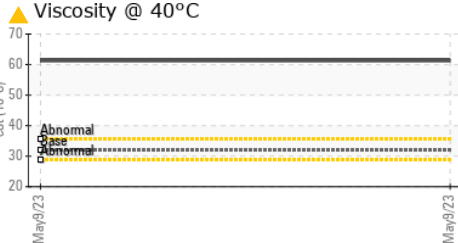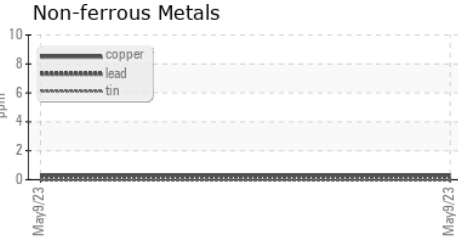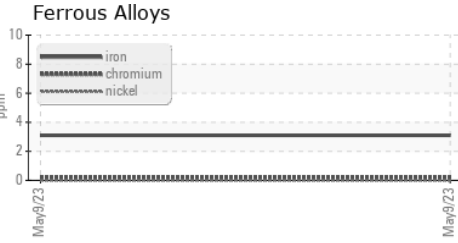

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0082111 **Received** : 30 Aug 2023
Lab Number : 02579376 **Diagnosed** : 31 Aug 2023
Unique Number : 5632436 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PrtCount)

GFL Environmental - 527
 449 Feldman Rd.
 Timmins, ON
 CA P4N 7E2
 Contact: Martin St-Pierre
 martinstpierre@gflenv.com
 T: (705)264-8700
 F: (705)264-8701

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.