




OIL ANALYSIS REPORT

Sample Rating Trend

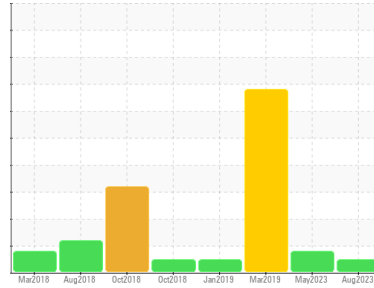

NORMAL



Machine Id
4784

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0090613	GFL0072815	GFL12052002
Sample Date	Client Info	17 Aug 2023	24 May 2023	31 Mar 2019
Machine Age	hrs	3403	896	409967
Oil Age	hrs	0	0	6331
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		NORMAL	ABNORMAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	1.7	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >110	48	56	36
Chromium	ppm ASTM D5185(m) >4	2	2	9
Nickel	ppm ASTM D5185(m) >2	<1	1	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >2	<1	0	0
Aluminum	ppm ASTM D5185(m) >25	5	4	3
Lead	ppm ASTM D5185(m) >45	25	17	0
Copper	ppm ASTM D5185(m) >85	80	341	2
Tin	ppm ASTM D5185(m) >4	3	3	5
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	2	<1	2
Barium	ppm ASTM D5185(m) 0	<1	<1	0
Molybdenum	ppm ASTM D5185(m) 50	55	62	61
Manganese	ppm ASTM D5185(m) 0	<1	1	---
Magnesium	ppm ASTM D5185(m) 950	881	1011	860
Calcium	ppm ASTM D5185(m) 1050	942	1137	962
Phosphorus	ppm ASTM D5185(m) 995	900	1059	953
Zinc	ppm ASTM D5185(m) 1180	1060	1225	1102
Sulfur	ppm ASTM D5185(m) 2600	1898	2044	---
Lithium	ppm ASTM D5185(m)	<1	<1	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >30	7	9	6
Sodium	ppm ASTM D5185(m)	6	8	8
Potassium	ppm ASTM D5185(m) >20	2	2	2

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	1	1.1	0.75
Nitration	Abs/cm ASTM D7624* >20	11.2	10.7	14.1
Sulfation	Abs/.1mm ASTM D7415* >30	26.0	22.9	7.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	25.3	20.3	14.7











OIL ANALYSIS REPORT

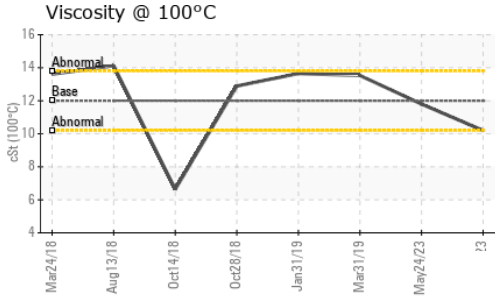

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	10.2	11.8

GRAPHS

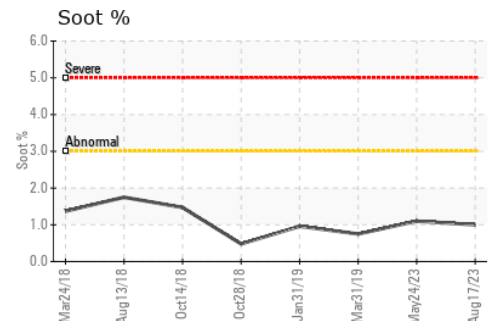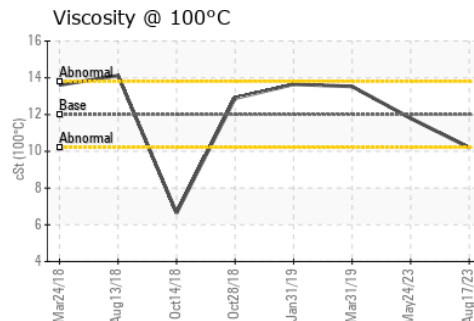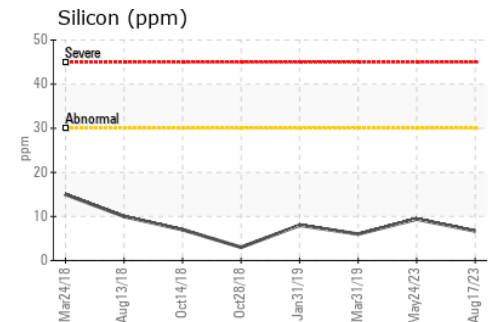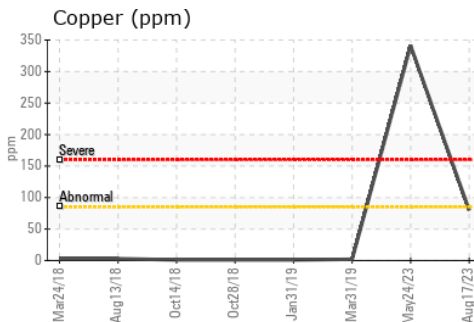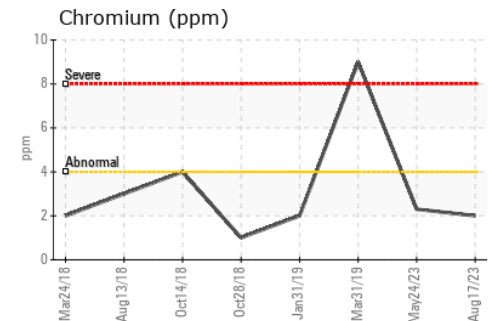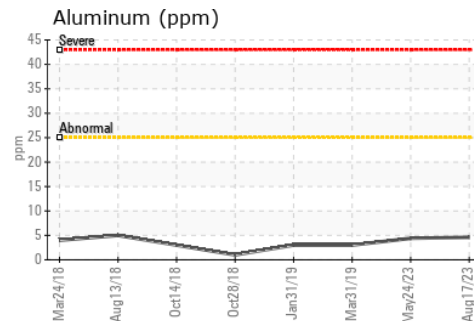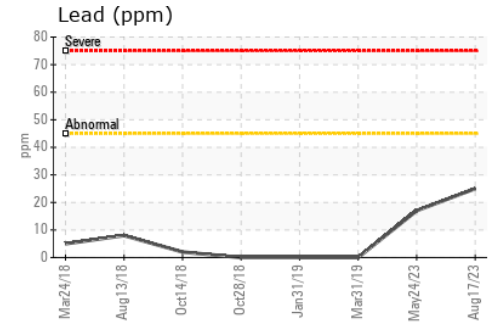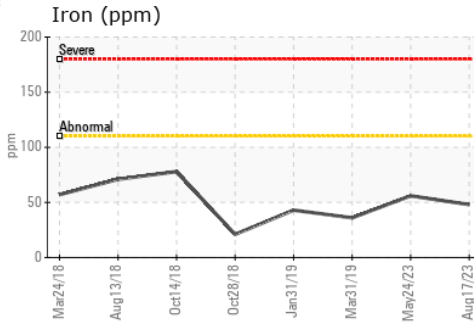

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**
Sample No. : GFL0090613 **Received** : 31 Aug 2023 **8409 - 15th Street NW**
Lab Number : 02579569 **Diagnosed** : 01 Sep 2023 **Edmonton, AB**
Unique Number : 5632629 **Diagnostician** : Kevin Marson **CA T6P 0B8**
Test Package : MOB 1 **Contact: Antonio De Rosa**
aderosa@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (780)509-2640
F: (780)444-8851