




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
CAPLAN
 Machine Id
#813101
 Component
Front Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (30 LTR)

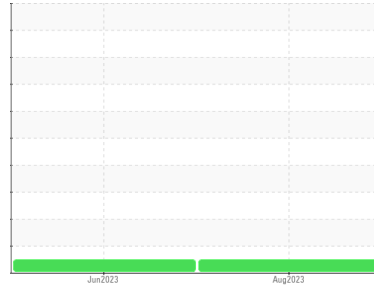

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0079100	GFL0079108	---
Sample Date	Client Info		28 Aug 2023	27 Jun 2023	---
Machine Age	hrs	Client Info	901	585	---
Oil Age	hrs	Client Info	316	585	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	16	45	---
Chromium	ppm	ASTM D5185(m) >20	<1	1	---
Nickel	ppm	ASTM D5185(m) >2	0	<1	---
Titanium	ppm	ASTM D5185(m) >2	<1	<1	---
Silver	ppm	ASTM D5185(m) >2	0	<1	---
Aluminum	ppm	ASTM D5185(m) >20	26	22	---
Lead	ppm	ASTM D5185(m) >40	<1	<1	---
Copper	ppm	ASTM D5185(m) >330	2	14	---
Tin	ppm	ASTM D5185(m) >15	<1	<1	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	24	33	---
Barium	ppm	ASTM D5185(m) 0	<1	5	---
Molybdenum	ppm	ASTM D5185(m) 50	66	43	---
Manganese	ppm	ASTM D5185(m) 0	1	8	---
Magnesium	ppm	ASTM D5185(m) 950	650	587	---
Calcium	ppm	ASTM D5185(m) 1050	1431	1591	---
Phosphorus	ppm	ASTM D5185(m) 995	1009	768	---
Zinc	ppm	ASTM D5185(m) 1180	1117	880	---
Sulfur	ppm	ASTM D5185(m) 2600	2665	1933	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	5	16	---
Sodium	ppm	ASTM D5185(m)	2	5	---
Potassium	ppm	ASTM D5185(m) >20	62	68	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	0.1	0.2	---
Nitration	Abs/cm	ASTM D7624* >20	7.7	9.4	---
Sulfation	Abs/.1mm	ASTM D7415* >30	19.8	22.6	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	14.3	21.5	---











OIL ANALYSIS REPORT

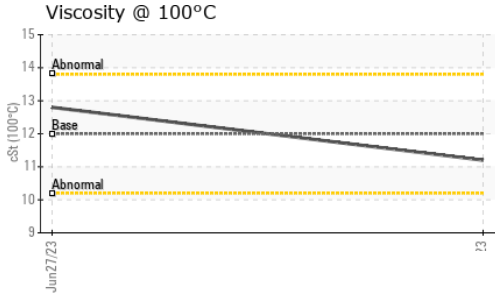

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	12.8

GRAPHS

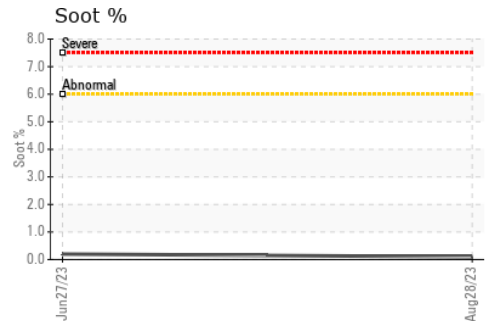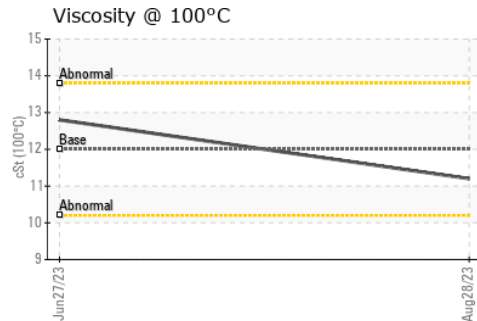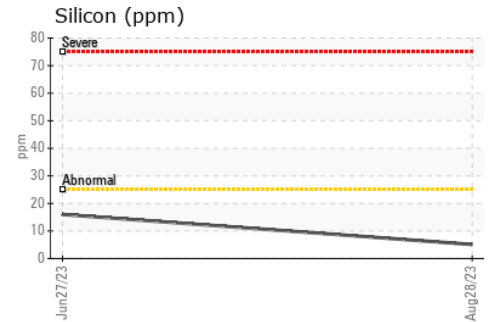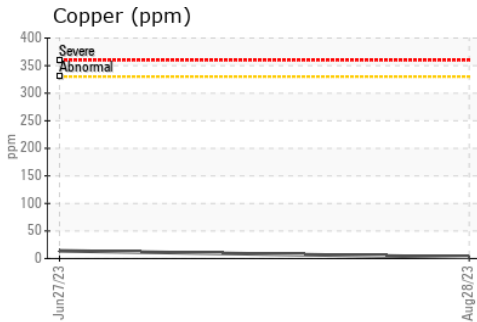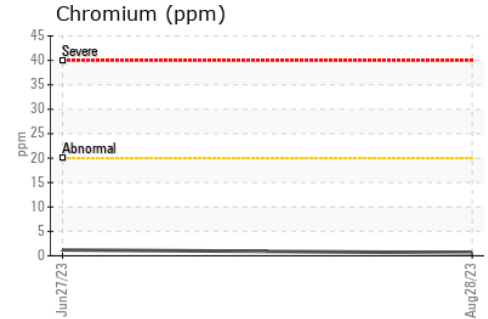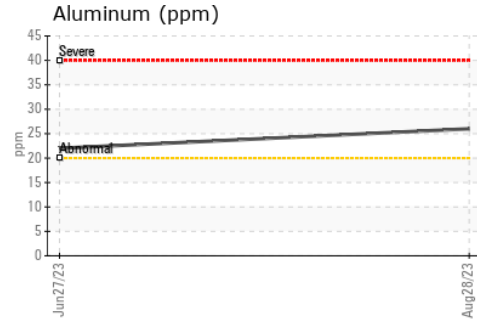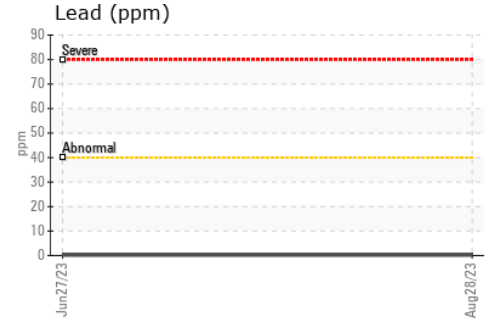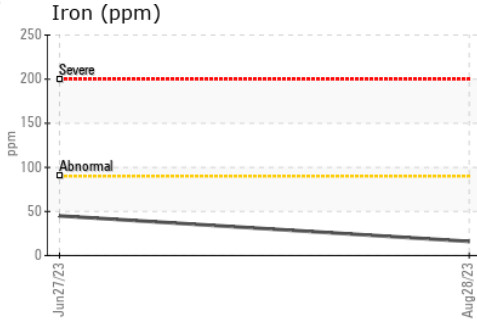

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0079100 **Received** : 31 Aug 2023
Lab Number : 02579653 **Diagnosed** : 31 Aug 2023
Unique Number : 5632713 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Vincent Maltais
 info@foretsstar.com
 T: 4(18)388-2626
 F: (418)388-2038