



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**933011**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090610</b>	---	---
Sample Date	Client Info		<b>24 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>2248</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	<b>19</b>	---	---
Chromium	ppm	ASTM D5185(m) >5	<b>2</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>8</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>1</b>	---	---
Copper	ppm	ASTM D5185(m) >150	<b>2</b>	---	---
Tin	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 1	<b>8</b>	---	---
Barium	ppm	ASTM D5185(m) 1	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 60	<b>57</b>	---	---
Manganese	ppm	ASTM D5185(m) 1	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 1010	<b>625</b>	---	---
Calcium	ppm	ASTM D5185(m) 1070	<b>1744</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>814</b>	---	---
Zinc	ppm	ASTM D5185(m) 1270	<b>968</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2060	<b>1993</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>9</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>11</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>10</b>	---	---
Glycol	%	ASTM D7922*	<b>0.0</b>	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	<b>&gt;20</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	<b>&gt;30</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>&gt;25</b>	---	---











# OIL ANALYSIS REPORT

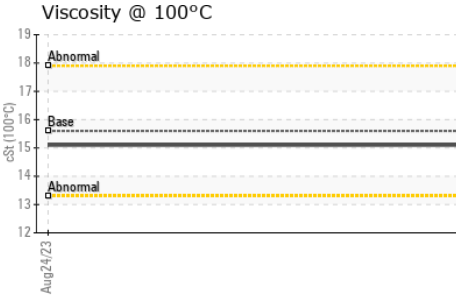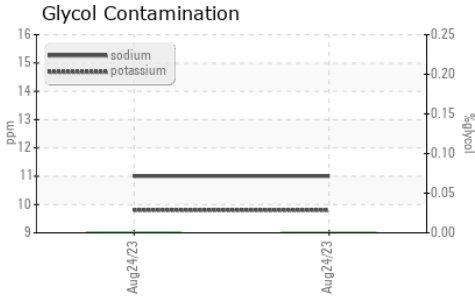

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	15.1	---

## GRAPHS

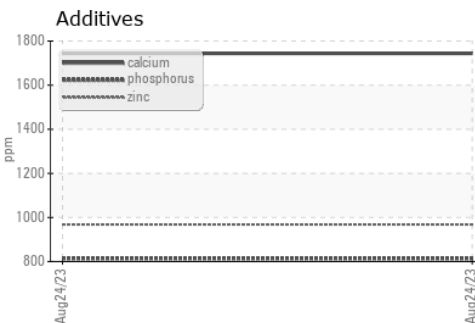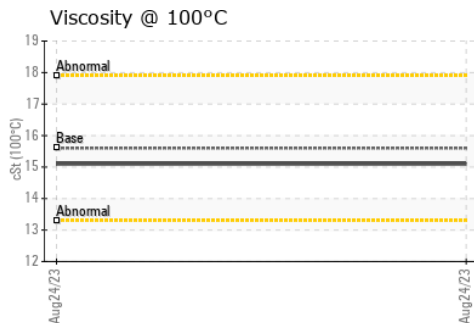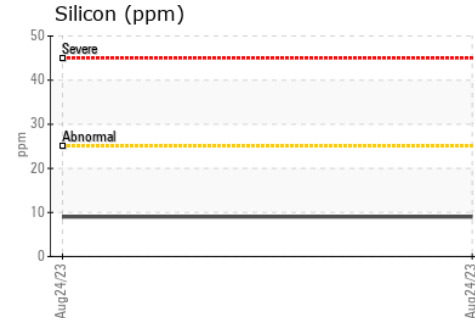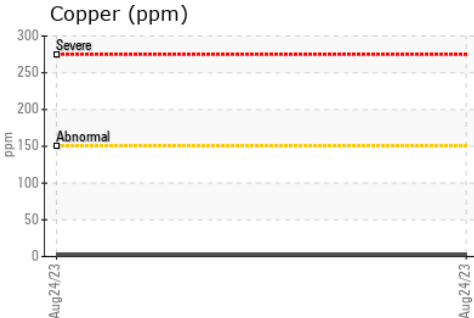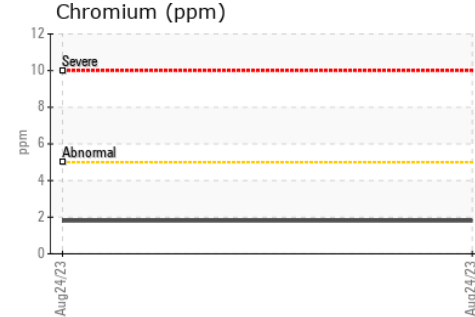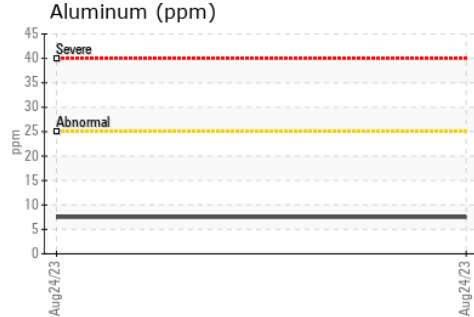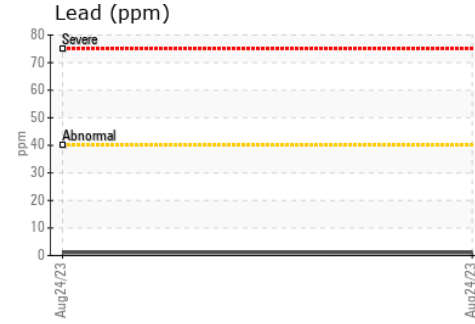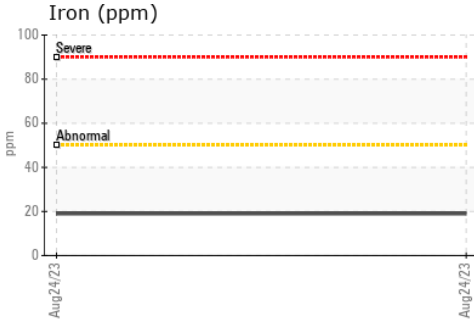

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW  
**Sample No.** : GFL0090610 **Received** : 05 Sep 2023  
**Lab Number** : 02580279 **Diagnosed** : 06 Sep 2023  
**Unique Number** : 5633339 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.