




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
5596
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

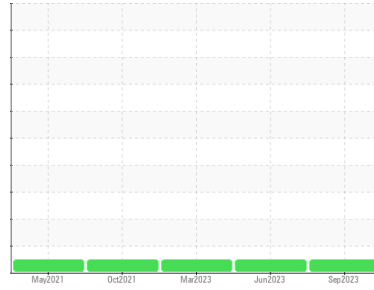

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090606	GFL0085934	GFL0072850
Sample Date	Client Info		10 Sep 2023	20 Jun 2023	19 Mar 2023
Machine Age	hrs	Client Info	5620	73688	4519
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	51	72	37
Chromium	ppm	ASTM D5185(m) >20	1	2	1
Nickel	ppm	ASTM D5185(m) >2	0	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	2	2	2
Lead	ppm	ASTM D5185(m) >40	6	8	4
Copper	ppm	ASTM D5185(m) >330	13	14	12
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	4	5	8
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 50	62	67	66
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	990	1098	1003
Calcium	ppm	ASTM D5185(m) 1050	1121	1244	1303
Phosphorus	ppm	ASTM D5185(m) 995	1049	1136	1109
Zinc	ppm	ASTM D5185(m) 1180	1224	1350	1278
Sulfur	ppm	ASTM D5185(m) 2600	2275	2340	2504
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	5	5	5
Sodium	ppm	ASTM D5185(m)	8	7	6
Potassium	ppm	ASTM D5185(m) >20	1	3	5

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.3	0.7	0.2
Nitration	Abs/cm	ASTM D7624* >20	10.5	11.2	10.3
Sulfation	Abs/.1mm	ASTM D7415* >30	23.6	25.2	23.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	21.3	24.0	20.8











OIL ANALYSIS REPORT

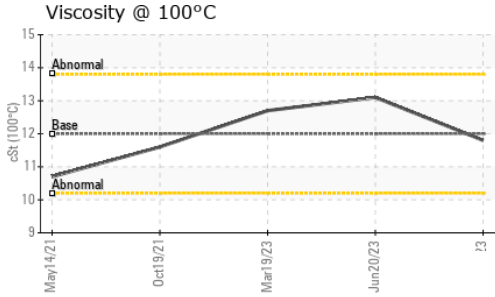

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.8	13.1

GRAPHS

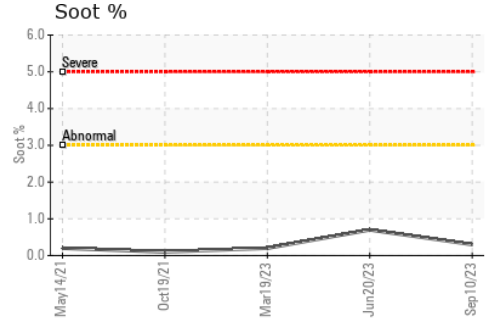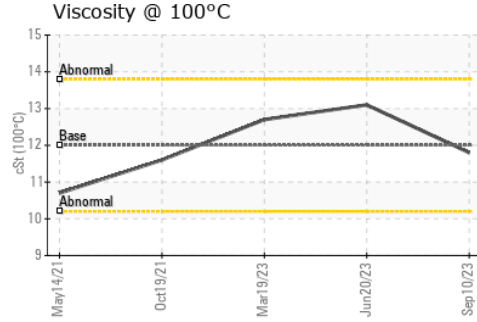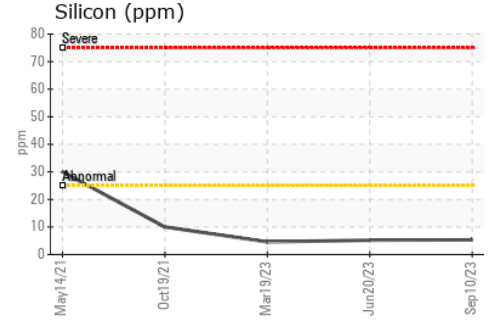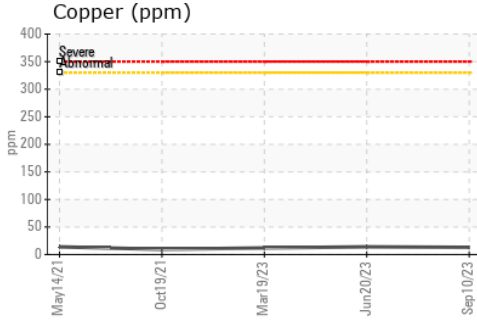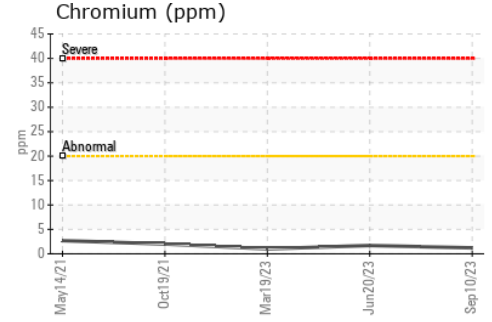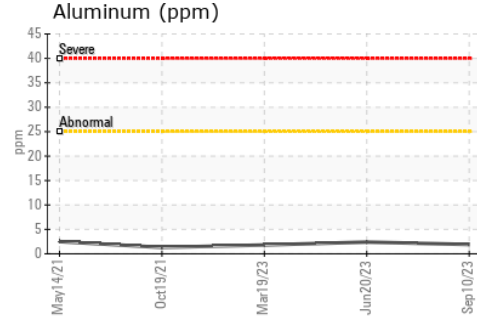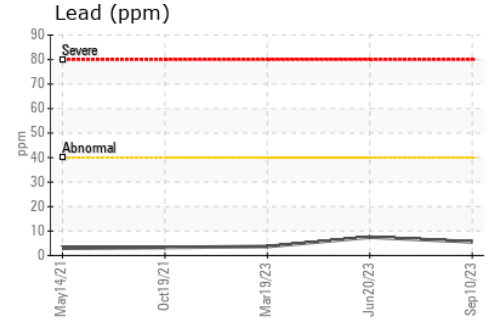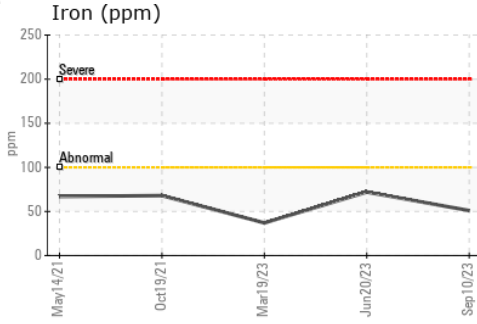

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0090606 **Received** : 05 Sep 2023
Lab Number : 02580284 **Diagnosed** : 11 Sep 2023
Unique Number : 5633344 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T:
 F: