




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

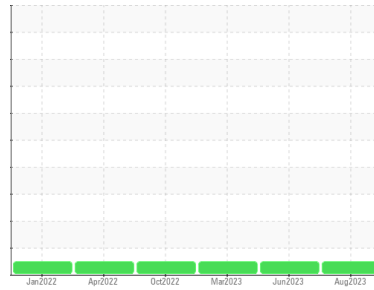

Machine Id
810052

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0062942	GFL0062922	GFL0062919
Sample Date	Client Info	24 Aug 2023	27 Jun 2023	29 Mar 2023
Machine Age	hrs	4176	3795	3277
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	19	24	19
Chromium	ppm ASTM D5185(m) >20	1	2	1
Nickel	ppm ASTM D5185(m) >4	<1	0	<1
Titanium	ppm ASTM D5185(m)	0	0	<1
Silver	ppm ASTM D5185(m) >3	<1	<1	0
Aluminum	ppm ASTM D5185(m) >20	4	4	5
Lead	ppm ASTM D5185(m) >40	<1	<1	<1
Copper	ppm ASTM D5185(m) >330	2	2	2
Tin	ppm ASTM D5185(m) >15	0	<1	<1
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 250	6	12	90
Barium	ppm ASTM D5185(m) 10	0	0	0
Molybdenum	ppm ASTM D5185(m) 100	58	54	12
Manganese	ppm ASTM D5185(m)	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 450	928	828	130
Calcium	ppm ASTM D5185(m) 3000	1078	1180	2113
Phosphorus	ppm ASTM D5185(m) 1150	1031	1003	979
Zinc	ppm ASTM D5185(m) 1350	1167	1159	1134
Sulfur	ppm ASTM D5185(m) 4250	2455	2435	2786
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	6	7	5
Sodium	ppm ASTM D5185(m) >216	7	7	3
Potassium	ppm ASTM D5185(m) >20	6	4	10

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.3	0.4	0.3
Nitration	Abs/cm ASTM D7624* >20	7.7	9.1	9.2
Sulfation	Abs/.1mm ASTM D7415* >30	20.0	20.7	25.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	14.4	17.4	18.7











OIL ANALYSIS REPORT

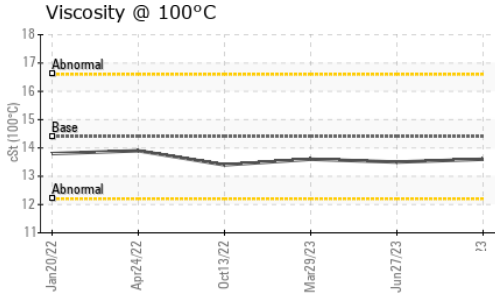

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.6	13.5

GRAPHS

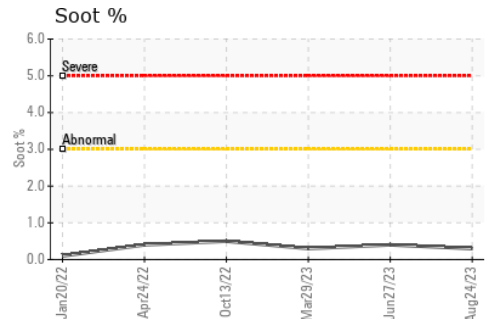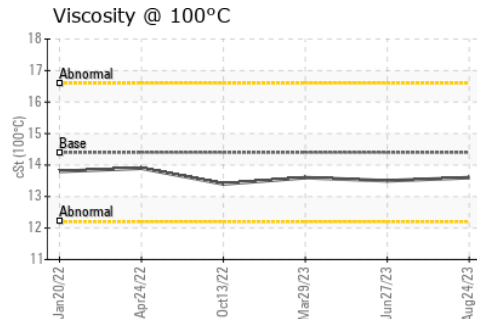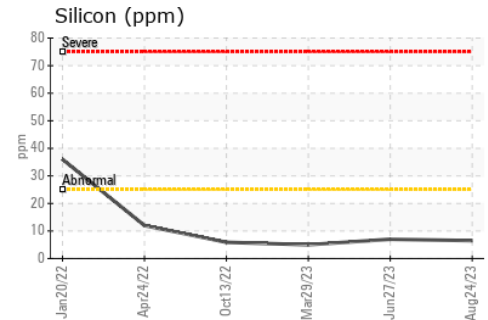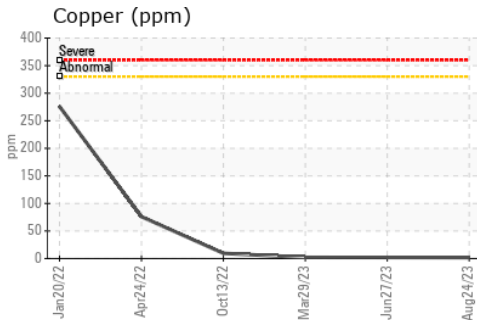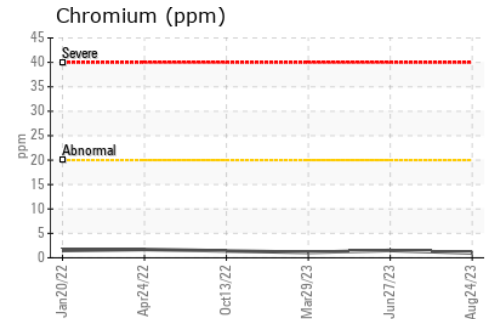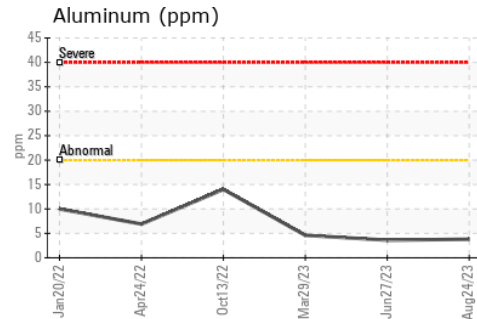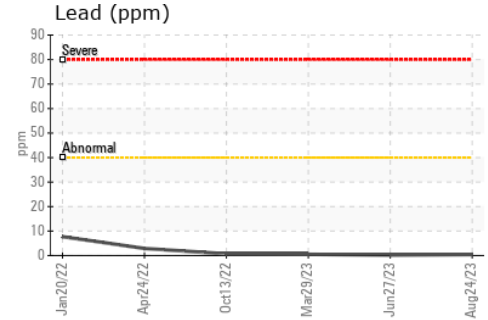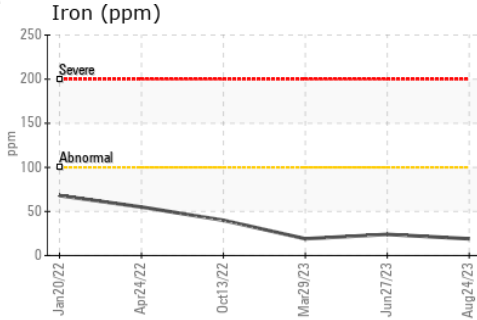

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 777 - Belleville-Municipal waste
Sample No. : GFL0062942 **Received** : 05 Sep 2023 197 Putman Industrial Road
Lab Number : 02580316 **Diagnosed** : 05 Sep 2023 Belleville, ON
Unique Number : 5633376 **Diagnostician** : Kevin Marson CA K8N 4Z6
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Andrea Michael
 amichael@gflenv.com
 T: (613)962-7144
 F: (613)962-1994