

Machine Id  
**WNMU0101VM0002248**  
Component  
**Hydraulic System**  
Fluid  
**FUTERRA HF 46 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the component(unconfirmed).

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078223</b>	PC0078222	---
Sample Date	Client Info			<b>31 Aug 2023</b>	31 Aug 2023	---
Machine Age	hrs	Client Info		<b>1</b>	1	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	4	---
Calcium	ppm	ASTM D5185(m)		<b>3</b>	74	---
Phosphorus	ppm	ASTM D5185(m)		<b>415</b>	369	---
Zinc	ppm	ASTM D5185(m)		<b>16</b>	427	---
Sulfur	ppm	ASTM D5185(m)		<b>717</b>	905	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---









# OIL ANALYSIS REPORT

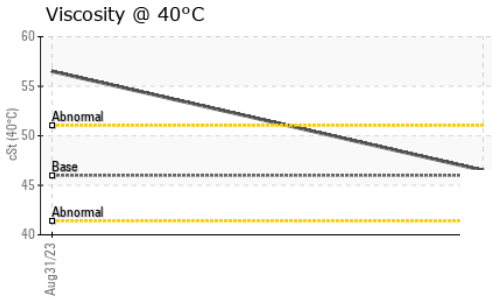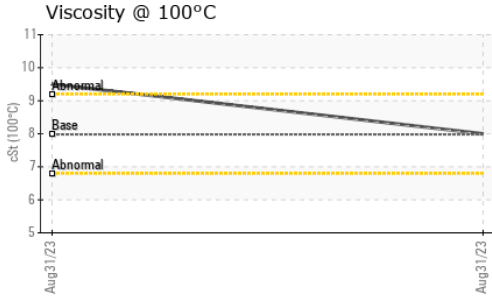

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	<b>46.5</b>	▲ 56.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	7.98	<b>8</b>	▲ 9.5	---
Viscosity Index (VI)	Scale	ASTM D2270*	140	<b>144</b>	151	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image

## GRAPHS

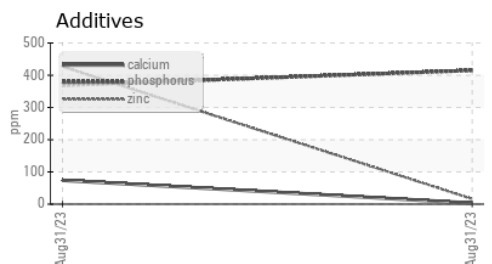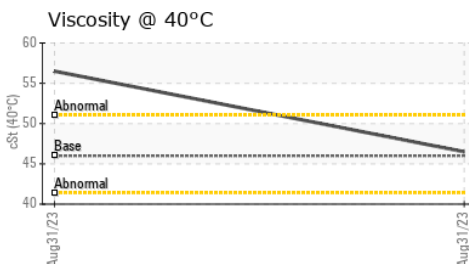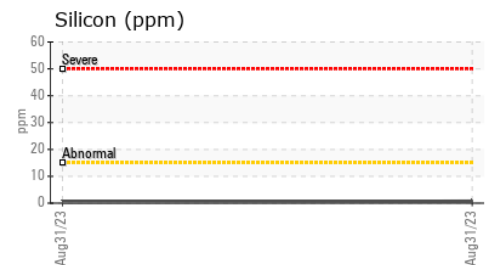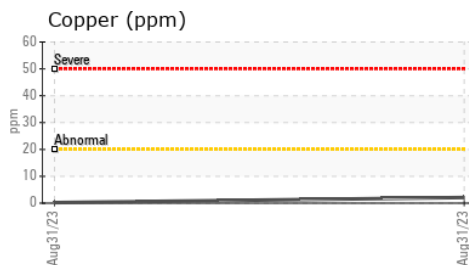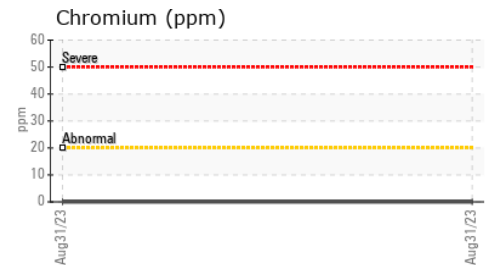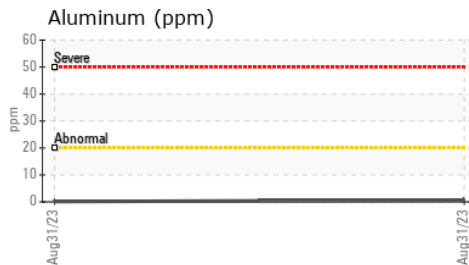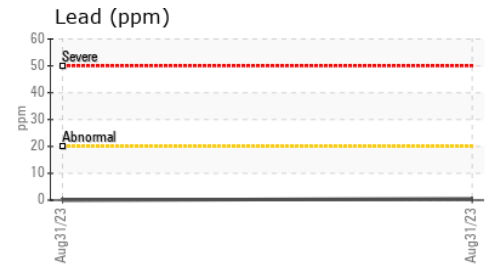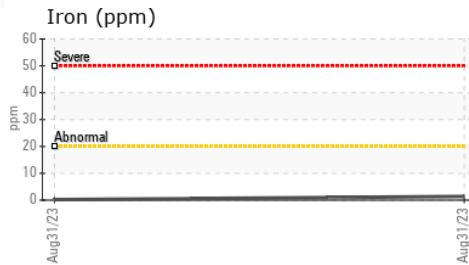

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0078223  
**Lab Number** : 02580407  
**Unique Number** : 5633467  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**J. RENE LAFOND INC**  
 3203 CHEM. CHARLES - LEONARD  
 MIRABEL, QC  
 CA J7N 2Y7  
 Contact: Service Manager  
 epoirier@jrenelafond.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.