




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
4560
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DURADRIIVE HD SYNTHETIC ATF (--- GAL)

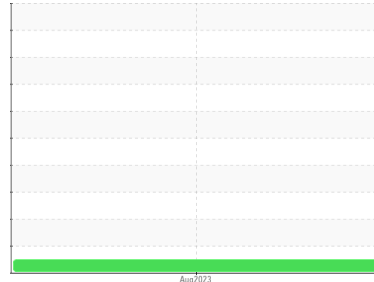

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il n'y a aucun indice de contamination dans le fluide.

Fluid Condition

L'état de le fluide est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088801	---	---
Sample Date	Client Info		24 Aug 2023	---	---
Machine Age	kms	Client Info	470923	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >160	23	---	---
Chromium	ppm	ASTM D5185(m) >5	0	---	---
Nickel	ppm	ASTM D5185(m) >5	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >5	0	---	---
Aluminum	ppm	ASTM D5185(m) >50	11	---	---
Lead	ppm	ASTM D5185(m) >50	4	---	---
Copper	ppm	ASTM D5185(m) >225	6	---	---
Tin	ppm	ASTM D5185(m) >10	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	82	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	<1	---	---
Manganese	ppm	ASTM D5185(m)	<1	---	---
Magnesium	ppm	ASTM D5185(m)	2	---	---
Calcium	ppm	ASTM D5185(m)	125	---	---
Phosphorus	ppm	ASTM D5185(m)	253	---	---
Zinc	ppm	ASTM D5185(m)	6	---	---
Sulfur	ppm	ASTM D5185(m)	1609	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	6	---	---
Sodium	ppm	ASTM D5185(m)	9	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---

VISUAL



	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	NONE	---	---
Yellow Metal	scalar	Visual* NONE	NONE	---	---
Precipitate	scalar	Visual* NONE	NONE	---	---
Silt	scalar	Visual* NONE	VLITE	---	---
Debris	scalar	Visual* NONE	VLITE	---	---
Sand/Dirt	scalar	Visual* NONE	NONE	---	---
Appearance	scalar	Visual* NORML	NORML	---	---
Odor	scalar	Visual* NORML	NORML	---	---
Emulsified Water	scalar	Visual* >0.1	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---











OIL ANALYSIS REPORT

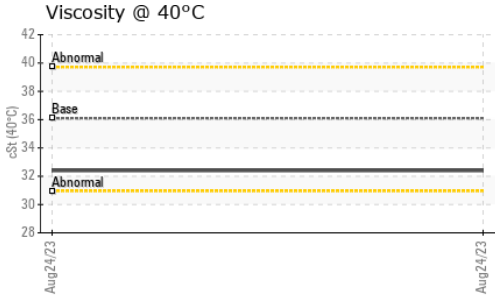

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	32.4	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

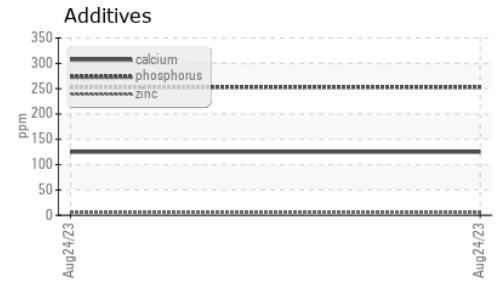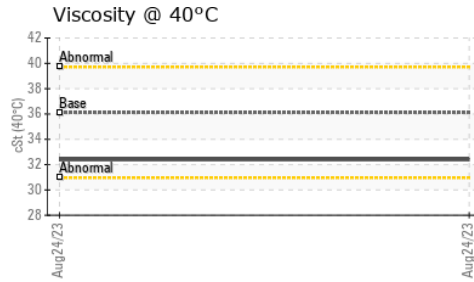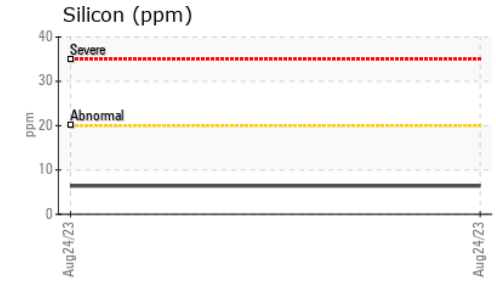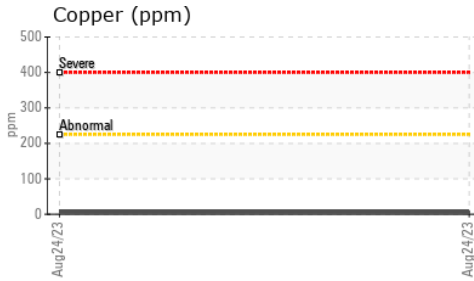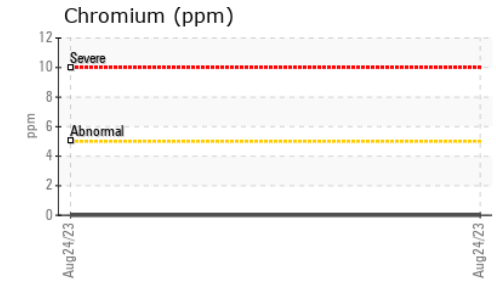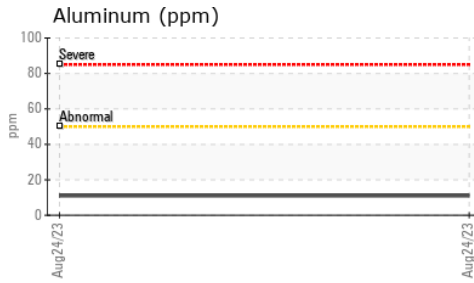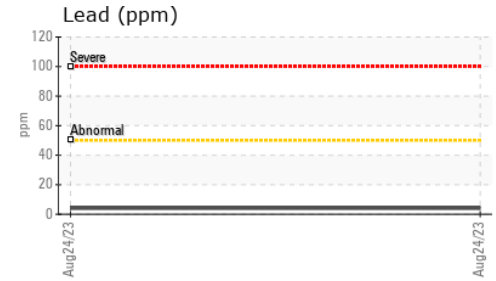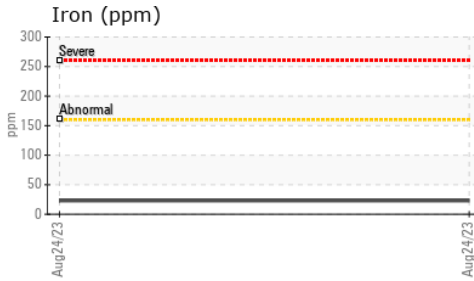

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste
Sample No. : GFL0088801 **Received** : 05 Sep 2023 4365 boul. St-Elzear Ouest, Laval, QC
Lab Number : 02580436 **Diagnosed** : 05 Sep 2023 CA H7P 4J3
Unique Number : 5633496 **Diagnostician** : Kevin Marson Contact: Louis Michaud
Test Package : MOB 1 louis.michaud@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.