




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

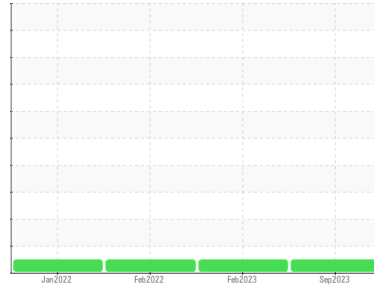

Machine Id  
**831018**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0090582</b>	GFL0064092	GFL0041435
Sample Date	Client Info	<b>07 Sep 2023</b>	16 Feb 2023	14 Feb 2022
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	3075
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>50	<b>19</b>	12	9
Chromium	ppm	ASTM D5185(m)	>4	<b>3</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>3</b>	2	1
Lead	ppm	ASTM D5185(m)	>30	<b>13</b>	6	<1
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	2	1
Tin	ppm	ASTM D5185(m)	>4	<b>1</b>	1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	50	<b>6</b>	5	21
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>55</b>	54	50
Manganese	ppm	ASTM D5185(m)	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	560	<b>605</b>	584	575
Calcium	ppm	ASTM D5185(m)	1510	<b>1661</b>	1681	1450
Phosphorus	ppm	ASTM D5185(m)	780	<b>768</b>	773	772
Zinc	ppm	ASTM D5185(m)	870	<b>927</b>	924	874
Sulfur	ppm	ASTM D5185(m)	2040	<b>1976</b>	2063	2015
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>+100	<b>5</b>	4	5
Sodium	ppm	ASTM D5185(m)		<b>10</b>	4	6
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1

## INFRA-RED


method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.6</b>	10.0	9.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>27.3</b>	24.1	20.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.3</b>	18.3	17.1











# OIL ANALYSIS REPORT

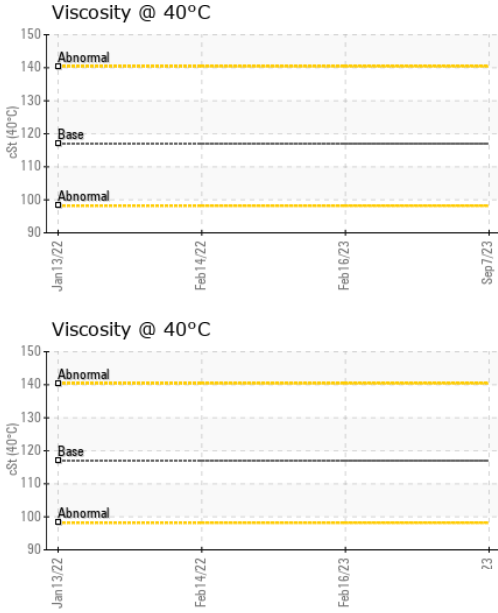

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	117.0	<b>119</b>	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	<b>14.8</b>	14.8
Viscosity Index (VI)	Scale	ASTM D2270*	134	<b>127</b>	---

## GRAPHS

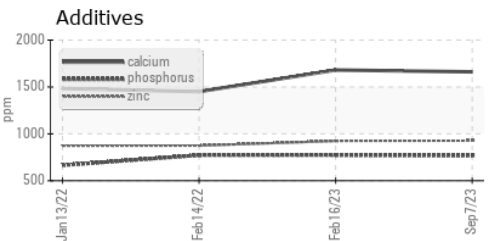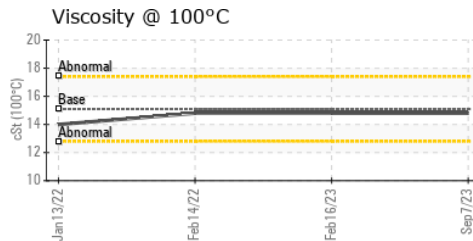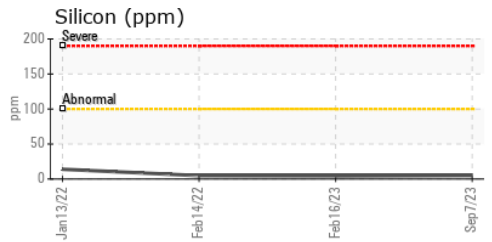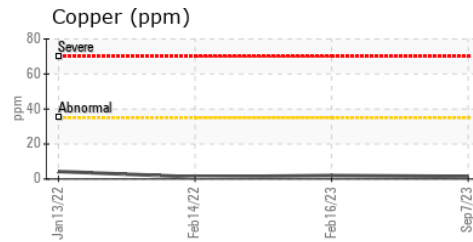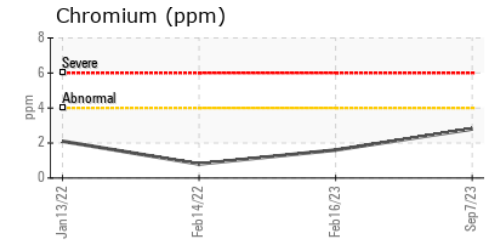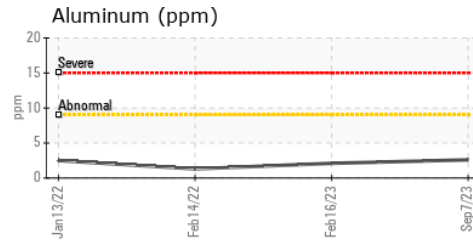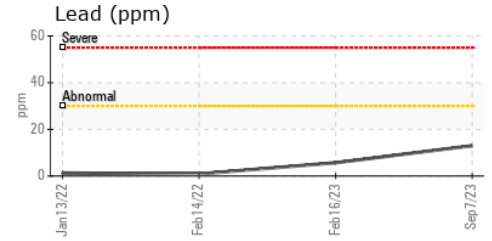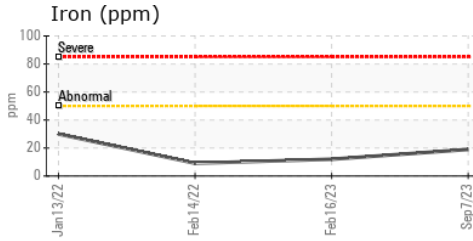

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW  
**Sample No.** : GFL0090582 **Received** : 08 Sep 2023  
**Lab Number** : 02581080 **Diagnosed** : 08 Sep 2023  
**Unique Number** : 5642145 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tim Greig  
 tgreig@gflenv.com

T:  
F: