




OIL ANALYSIS REPORT

Sample Rating Trend

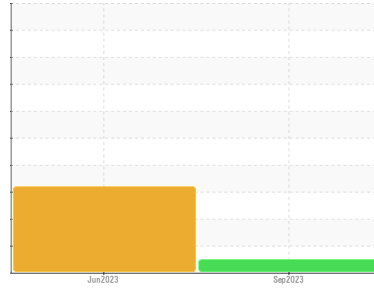

NORMAL



Machine Id
221094

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090584	GFL0085919	---
Sample Date	Client Info		02 Sep 2023	27 Jun 2023	---
Machine Age	hrs	Client Info	9841	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	1.7	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	12	▲ 87	---
Chromium	ppm	ASTM D5185(m)	>20	<1	5	---
Nickel	ppm	ASTM D5185(m)	>4	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	1	17	---
Lead	ppm	ASTM D5185(m)	>40	0	2	---
Copper	ppm	ASTM D5185(m)	>330	<1	22	---
Tin	ppm	ASTM D5185(m)	>15	0	▲ 12	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	<1	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	4	156	---
Barium	ppm	ASTM D5185(m)	0	0	3	---
Molybdenum	ppm	ASTM D5185(m)	50	54	157	---
Manganese	ppm	ASTM D5185(m)	0	<1	2	---
Magnesium	ppm	ASTM D5185(m)	950	918	170	---
Calcium	ppm	ASTM D5185(m)	1050	974	2296	---
Phosphorus	ppm	ASTM D5185(m)	995	991	917	---
Zinc	ppm	ASTM D5185(m)	1180	1118	1003	---
Sulfur	ppm	ASTM D5185(m)	2600	2461	4180	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	3	▲ 70	---
Sodium	ppm	ASTM D5185(m)		1	4	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0.9	---
Nitration	Abs/cm	ASTM D7624*	>20	6.4	10.2	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	21.9	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.9	14.9	---











OIL ANALYSIS REPORT

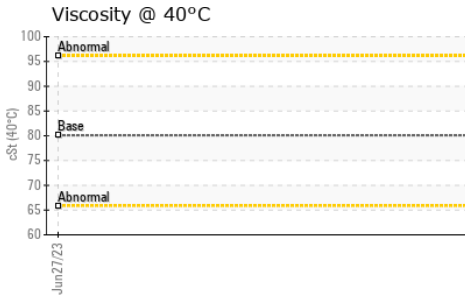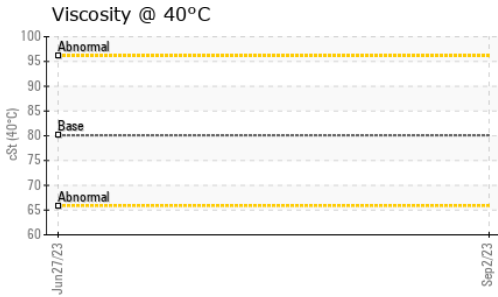

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	71.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.1	9.4
Viscosity Index (VI)	Scale	ASTM D2270*	144	146	---

GRAPHS

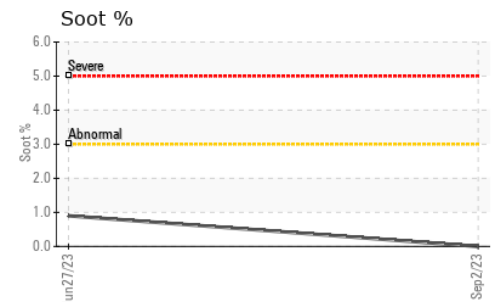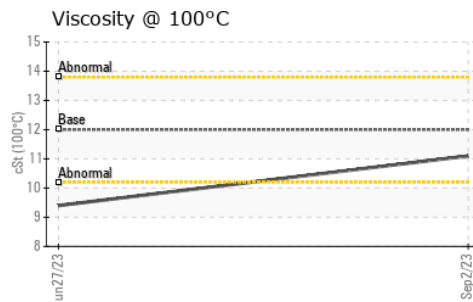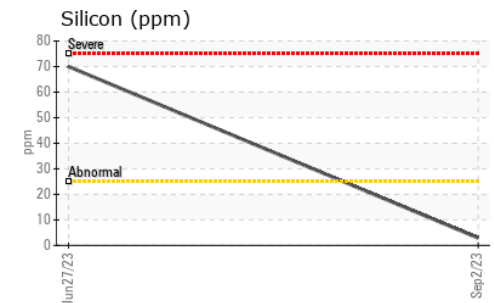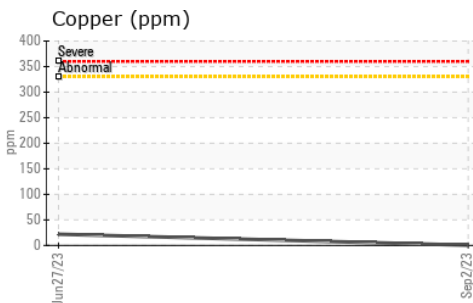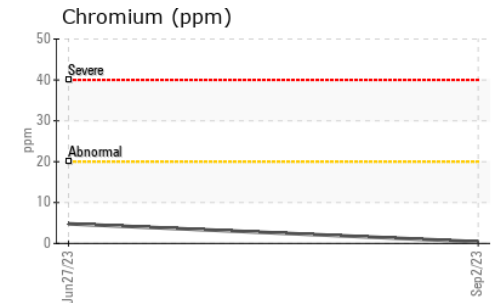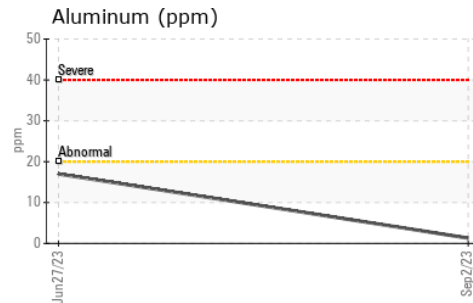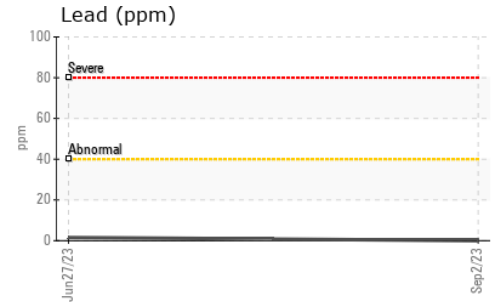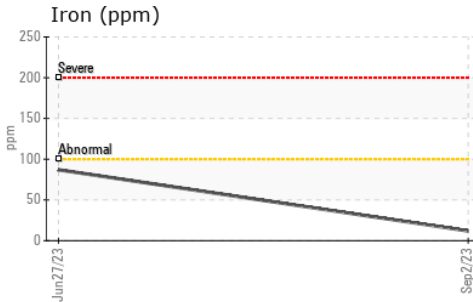

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0090584 **Received** : 08 Sep 2023
Lab Number : 02581081 **Diagnosed** : 08 Sep 2023
Unique Number : 5642146 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, VI)

8409 -15th Street NW
Edmonton, AB
CA T6P 0B8
Contact: Tim Greig
tgreig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: