



OIL ANALYSIS REPORT

Sample Rating Trend


ISO



Machine Id
401099

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

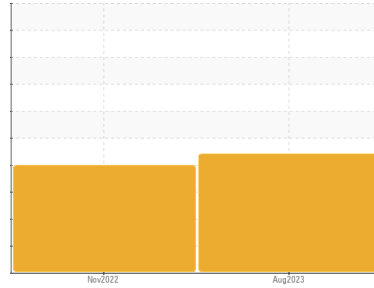

DIAGNOSIS

Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0084121	GFL0057457	---
Sample Date	Client Info	08 Aug 2023	08 Nov 2022	---
Machine Age	hrs	2788	2228	---
Oil Age	hrs	0	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		SEVERE	SEVERE	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >20	15	13	---
Chromium	ppm	ASTM D5185(m) >10	3	2	---
Nickel	ppm	ASTM D5185(m) >10	0	<1	---
Titanium	ppm	ASTM D5185(m)	<1	<1	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >10	3	2	---
Lead	ppm	ASTM D5185(m) >10	<1	0	---
Copper	ppm	ASTM D5185(m) >75	1	<1	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	<1	1	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 0	<1	<1	---
Manganese	ppm	ASTM D5185(m) 1	<1	<1	---
Magnesium	ppm	ASTM D5185(m) 0	5	5	---
Calcium	ppm	ASTM D5185(m) 50	57	60	---
Phosphorus	ppm	ASTM D5185(m) 330	337	349	---
Zinc	ppm	ASTM D5185(m) 430	410	397	---
Sulfur	ppm	ASTM D5185(m) 760	743	776	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS




method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >20	2	3	---
Sodium	ppm	ASTM D5185(m)	1	1	---
Potassium	ppm	ASTM D5185(m) >20	<1	<1	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	149812	99426	---
Particles >6µm	ASTM D7647 >1300	48274	27205	---
Particles >14µm	ASTM D7647 >160	581	275	---
Particles >21µm	ASTM D7647 >40	142	25	---
Particles >38µm	ASTM D7647 >10	3	0	---
Particles >71µm	ASTM D7647 >3	0	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	24/23/16	24/22/15	---




OIL ANALYSIS REPORT

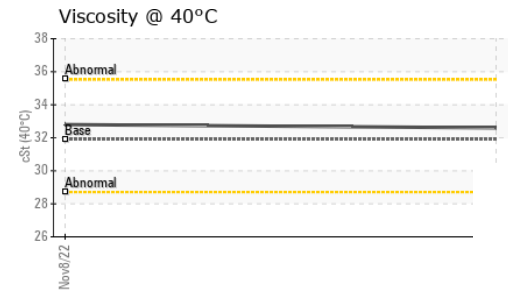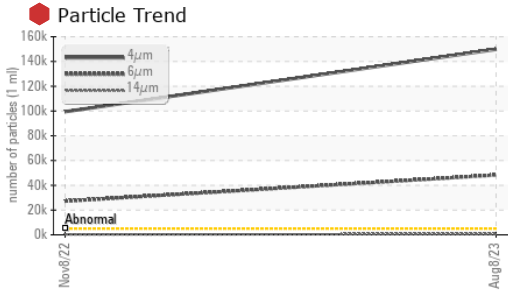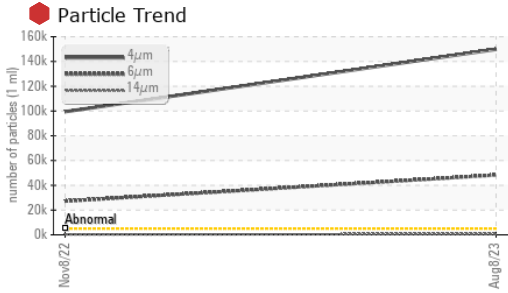





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	32.6	32.8

SAMPLE IMAGES

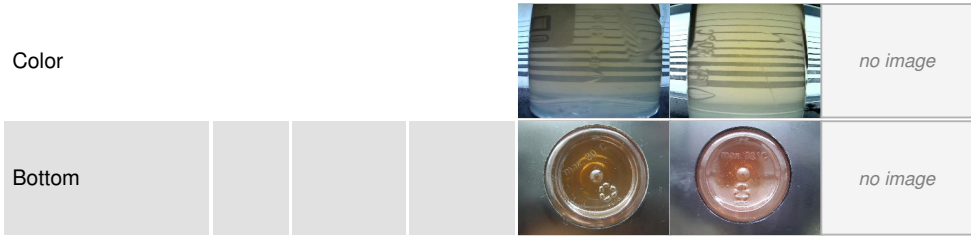

GRAPHS

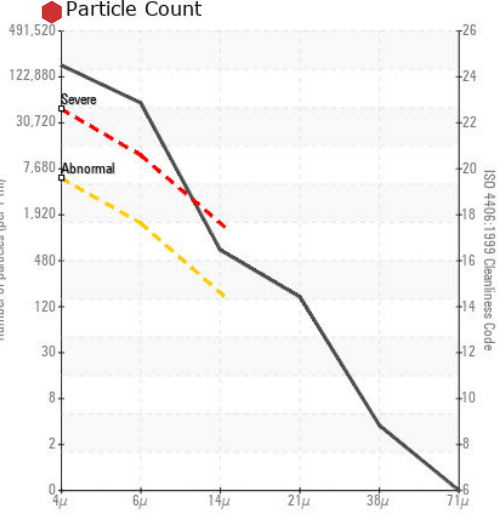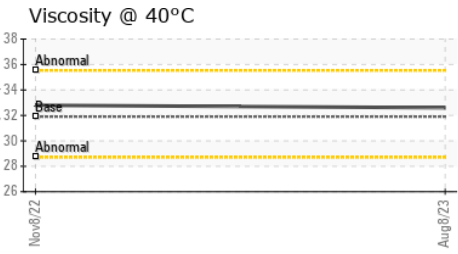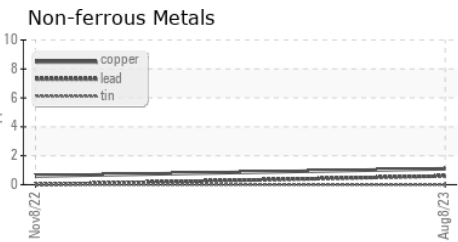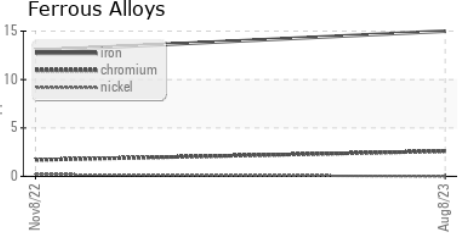

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 573 - Vancouver Hauling
Sample No. : GFL0084121 **Received** : 08 Sep 2023 70 Golden Drive,
Lab Number : 02581175 **Diagnosed** : 11 Sep 2023 Coquitlam, BC
Unique Number : 5642240 **Diagnostician** : Wes Davis CA V3K 6B5
Test Package : MOB 1 (Additional Tests: PrtCount) Contact: Catia Klagenberg Alves
cklagenbergalves@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.