




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

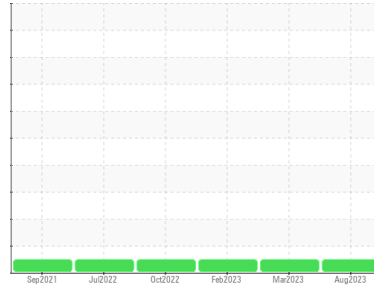

Machine Id  
**830013**  
 Component  
**Transmission (Auto)**  
 Fluid  
**ALLISON TES 295 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0084176</b>	GFL0073198	GFL0063642
Sample Date	Client Info		<b>14 Aug 2023</b>	31 Mar 2023	02 Feb 2023
Machine Age	hrs	Client Info	<b>6378</b>	5572	14245
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >160	<b>14</b>	21	41
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >50	<b>3</b>	3	13
Lead	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	1	4
Copper	ppm	ASTM D5185(m) >225	<b>6</b>	7	10
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	<1	1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 150	<b>67</b>	71	81
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 0	<b>2</b>	1	1
Calcium	ppm	ASTM D5185(m) 40	<b>123</b>	124	136
Phosphorus	ppm	ASTM D5185(m) 320	<b>224</b>	240	266
Zinc	ppm	ASTM D5185(m) 5	<b>9</b>	7	4
Sulfur	ppm	ASTM D5185(m) 1050	<b>1450</b>	1491	1510
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>3</b>	4	9
Sodium	ppm	ASTM D5185(m)	<b>2</b>	3	5
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	1	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG




# OIL ANALYSIS REPORT








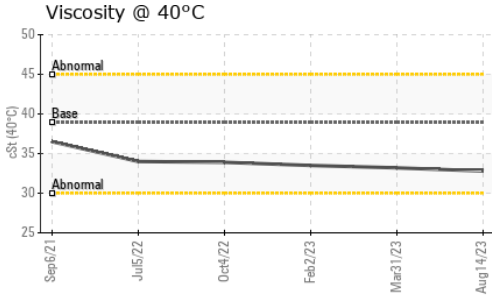


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	<b>32.8</b>	33.2	33.5

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

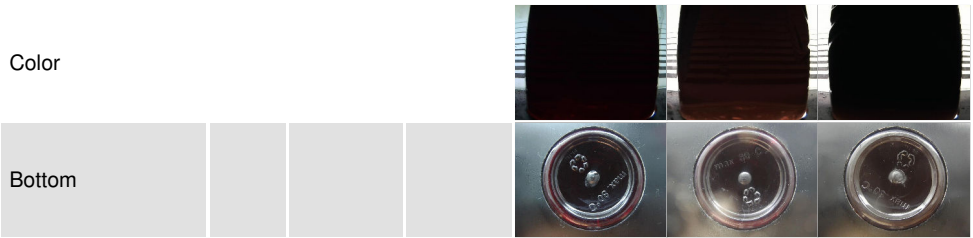

## GRAPHS

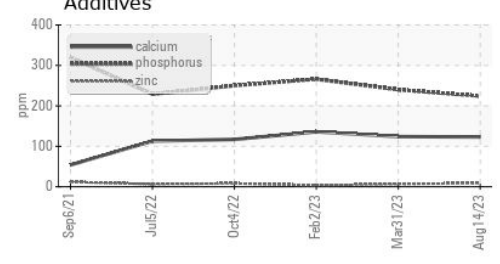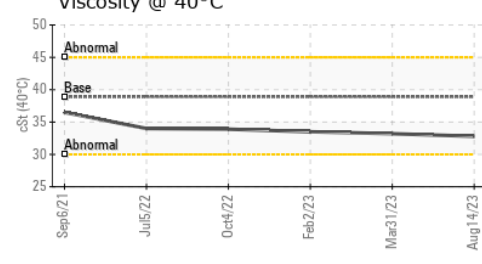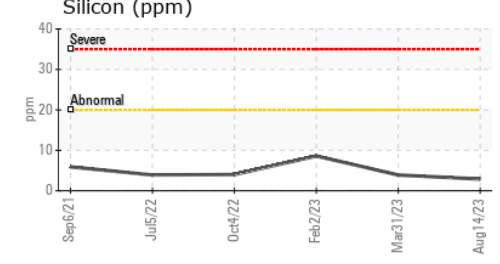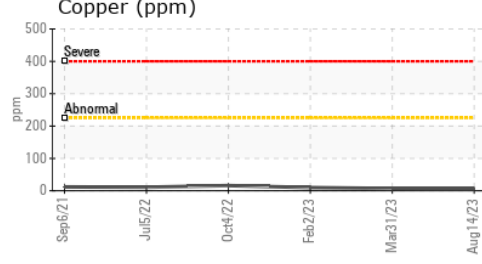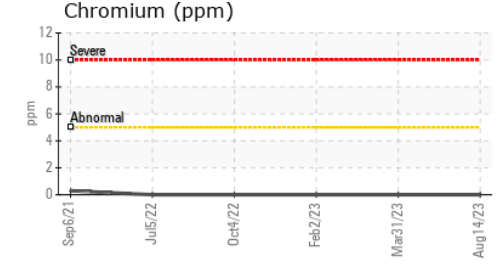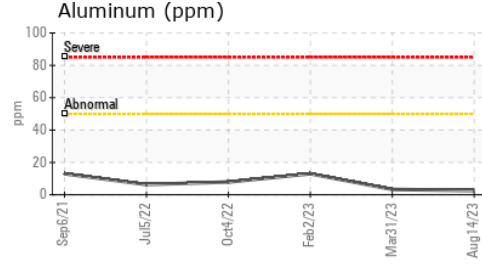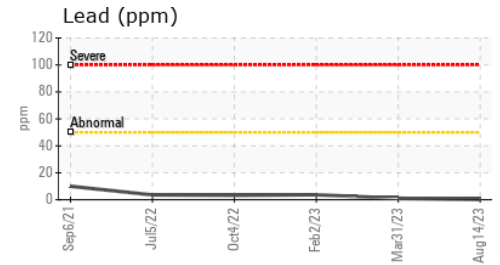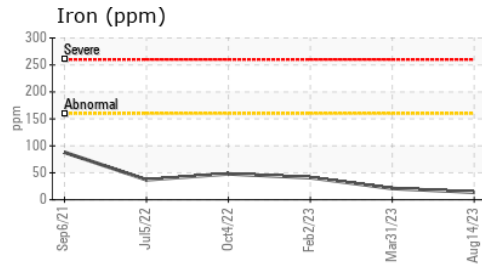

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 573 - Vancouver Hauling  
**Sample No.** : GFL0084176 **Received** : 08 Sep 2023 70 Golden Drive,  
**Lab Number** : 02581178 **Diagnosed** : 08 Sep 2023 Coquitlam, BC  
**Unique Number** : 5642243 **Diagnostician** : Wes Davis CA V3K 6B5  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Catia Klagenberg Alves  
 cklagenbergalves@gflenv.com  
 T:  
 F: