




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

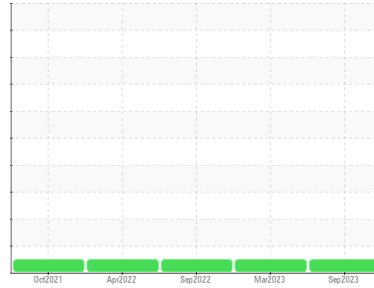

Machine Id  
**731056**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0085887</b>	GFL0071075	GFL0054874
Sample Date	Client Info		<b>07 Sep 2023</b>	07 Mar 2023	13 Sep 2022
Machine Age	hrs	Client Info	<b>5546</b>	4415	3290
Oil Age	hrs	Client Info	<b>1200</b>	1200	1000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>11</b>	11	11
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	3
Lead	ppm	ASTM D5185(m)	>30	<b>6</b>	5	1
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	50	<b>7</b>	14	8
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>61</b>	64	54
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	560	<b>646</b>	665	584
Calcium	ppm	ASTM D5185(m)	1510	<b>1679</b>	1826	1720
Phosphorus	ppm	ASTM D5185(m)	780	<b>793</b>	882	763
Zinc	ppm	ASTM D5185(m)	870	<b>991</b>	1028	977
Sulfur	ppm	ASTM D5185(m)	2040	<b>2113</b>	2281	2127
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>4</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>9</b>	9	8
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.1</b>	10.5	9.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.8</b>	25.9	21.0

## FLUID DEGRADATION


	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.8</b>	17.4	15.5

## VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG











# OIL ANALYSIS REPORT

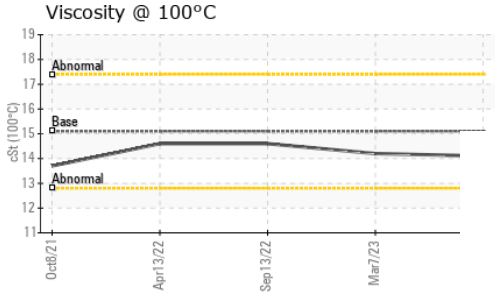

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.1	14.2	14.6

## GRAPHS

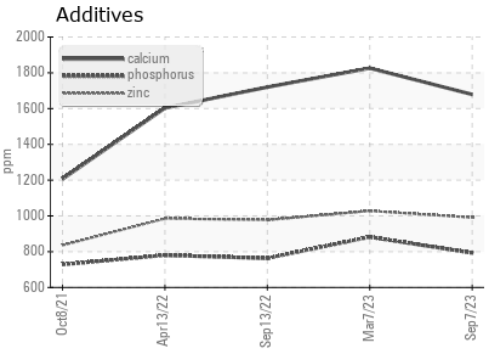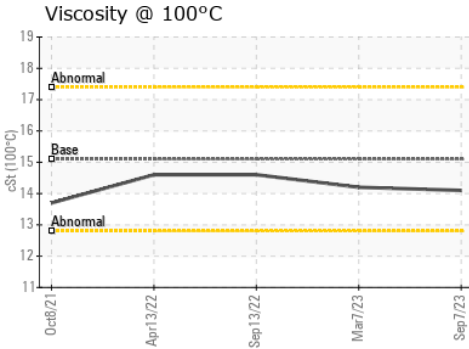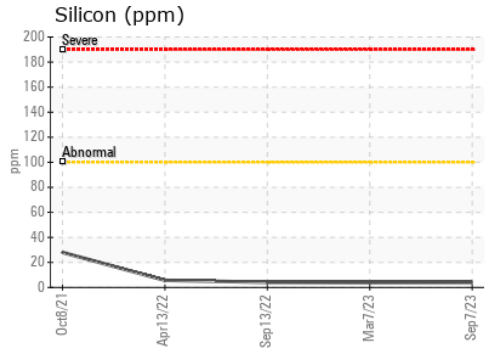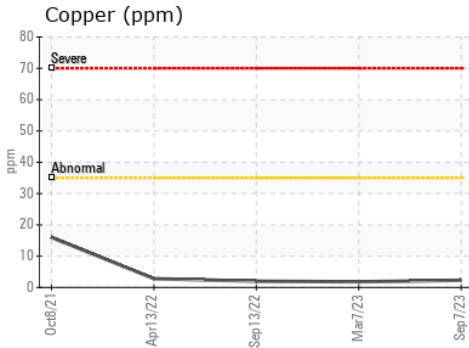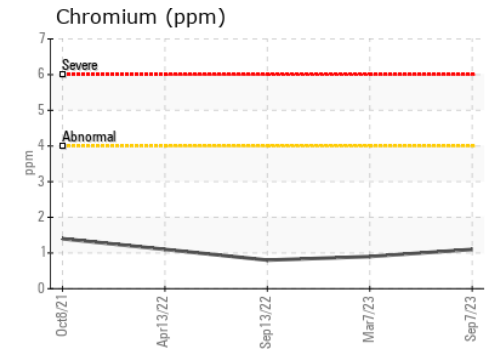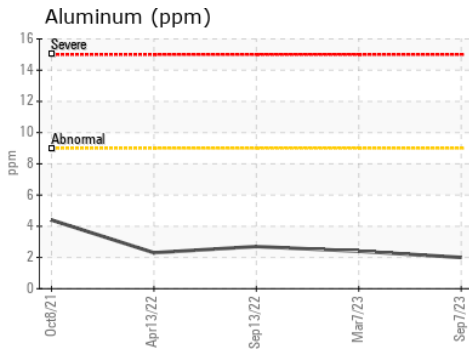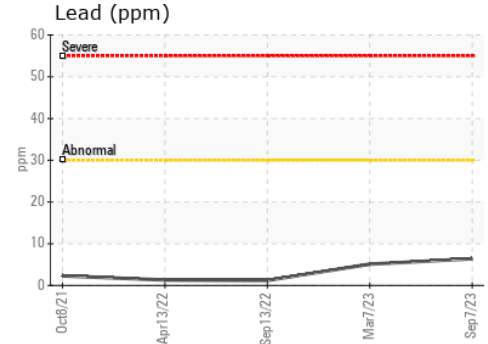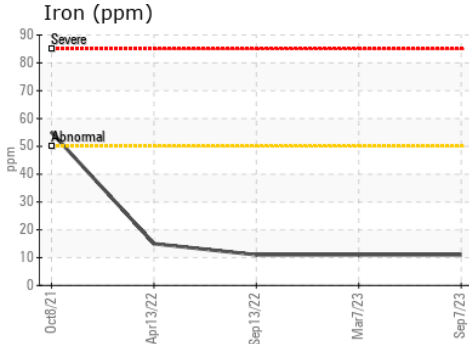

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 209 - Hamilton**  
**Sample No.** : GFL0085887 **Received** : 11 Sep 2023 560 Seaman Street  
**Lab Number** : 02581320 **Diagnosed** : 11 Sep 2023 Stoney Creek, ON  
**Unique Number** : 5642385 **Diagnostician** : Wes Davis CA L8E 3X7  
**Test Package** : MOB 1 Contact: Fred Carleton

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

fred.carleton@gflenv.com  
 T: (289)925-6693  
 F: (905)664-9008