

Area
SHARP BUS LINES
Machine Id
INTERNATIONAL 1362
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)



DIAGNOSIS

Recommendation
Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
All component wear rates are normal.

Contamination
Water treatment chemicals present, indicating slow coolant leak. Test for glycol is negative. There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service (see recommendation).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0081285	---	---
Sample Date	Client Info			01 Sep 2023	---	---
Machine Age	kms Client Info			241819	---	---
Oil Age	kms Client Info			1820	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ATTENTION	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>2.0	<1.0	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	42	---	---
Chromium	ppm	ASTM D5185(m)	>20	1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	6	---	---
Lead	ppm	ASTM D5185(m)	>40	1	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	5	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	63	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1010	899	---	---
Calcium	ppm	ASTM D5185(m)	1070	967	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	994	---	---
Zinc	ppm	ASTM D5185(m)	1270	1095	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2474	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Sodium	ppm	ASTM D5185(m)		▲ 250	---	---
Potassium	ppm	ASTM D5185(m)	>20	17	---	---
Glycol	%	ASTM D7922*		0.0	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	2.8	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.5	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.7	---	---











OIL ANALYSIS REPORT

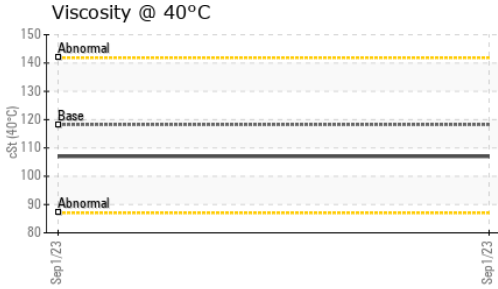

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	107	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	15.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	139	147	---	---

GRAPHS

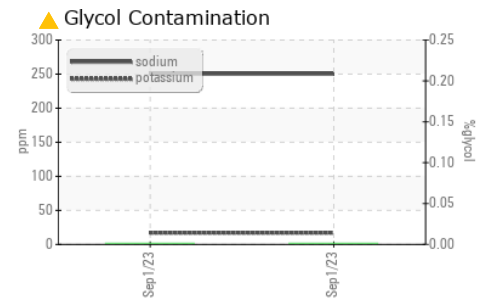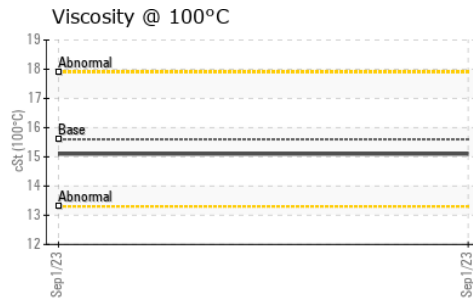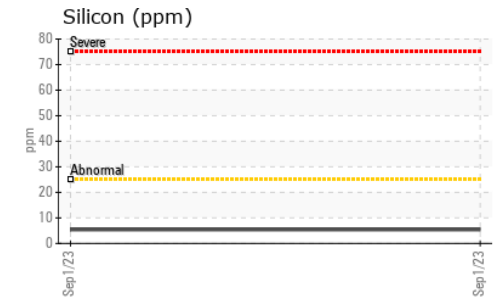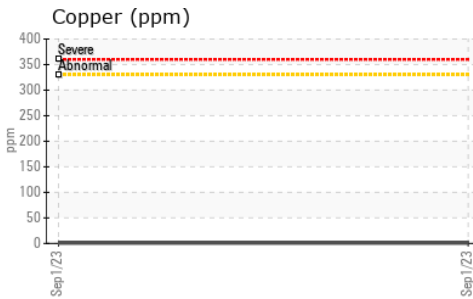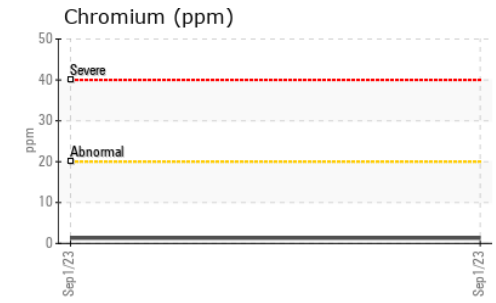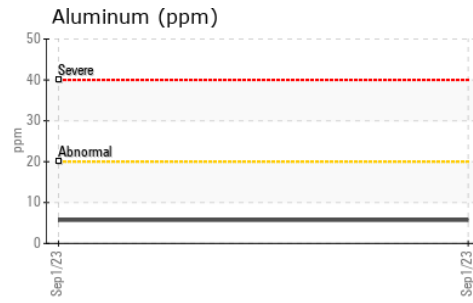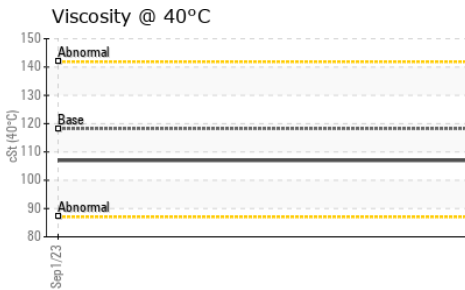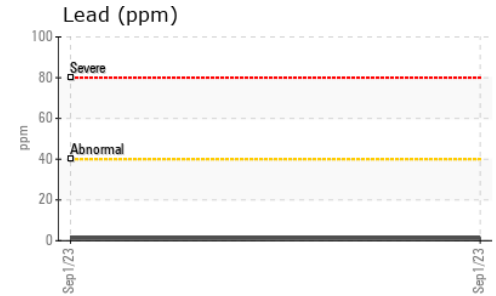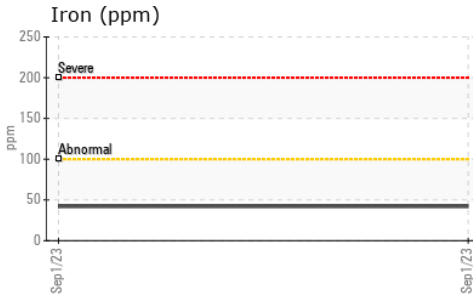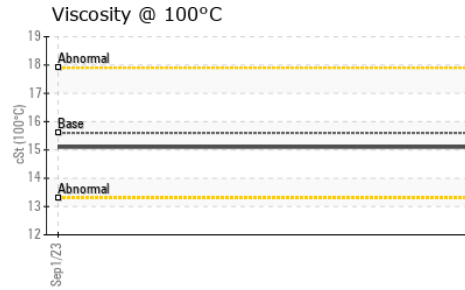

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081285 **Received** : 12 Sep 2023
Lab Number : 02581680 **Diagnosed** : 13 Sep 2023
Unique Number : 5642745 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol, KV40, VI)

ICSB - Brantford
 567 Oak Park Rd.
 Brantford, ON
 CA N3T 5L8
 Contact: Doug Hall
 Djhall@sharpbus.com
 T: (519)751-3434
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.