




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

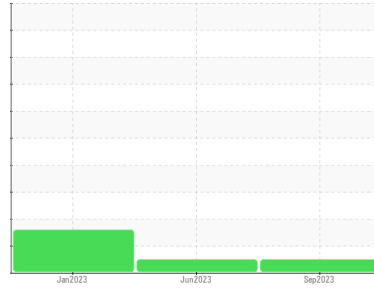

Machine Id
424072
Component
Diesel Engine
Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0084342	GFL0070664	GFL0044548
Sample Date	Client Info		04 Sep 2023	15 Jun 2023	27 Jan 2023
Machine Age	hrs	Client Info	15841	15558	445934
Oil Age	hrs	Client Info	287	600	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	23	22	37
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	3	3	4
Lead	ppm	ASTM D5185(m)	>40	<1	<1	2
Copper	ppm	ASTM D5185(m)	>330	4	2	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	1	3	6	25
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	60	59	53
Manganese	ppm	ASTM D5185(m)	1	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	1014	949	701
Calcium	ppm	ASTM D5185(m)	1070	1101	1211	1739
Phosphorus	ppm	ASTM D5185(m)	1150	1069	1037	947
Zinc	ppm	ASTM D5185(m)	1270	1234	1201	1080
Sulfur	ppm	ASTM D5185(m)	2060	2594	2417	2284
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	9	▲ 29
Sodium	ppm	ASTM D5185(m)		7	2	4
Potassium	ppm	ASTM D5185(m)	>20	3	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	7.3	9.0	7.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.1	21.2	19.5



OIL ANALYSIS REPORT







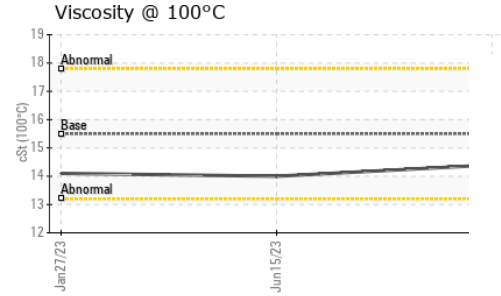
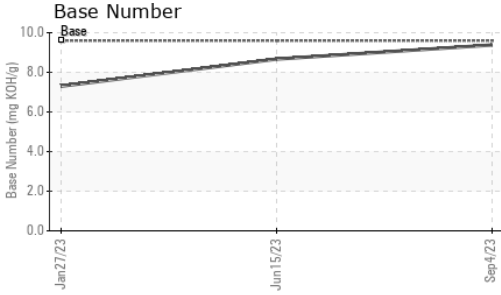


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.5	19.0	14.4
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	9.38	8.67	7.30

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	14.4	14.0	14.1

GRAPHS

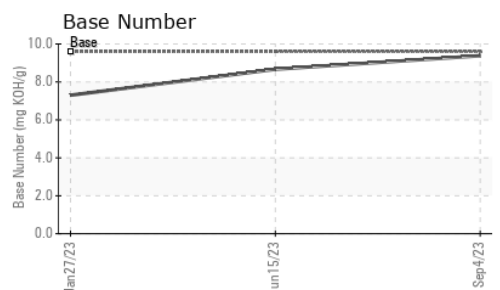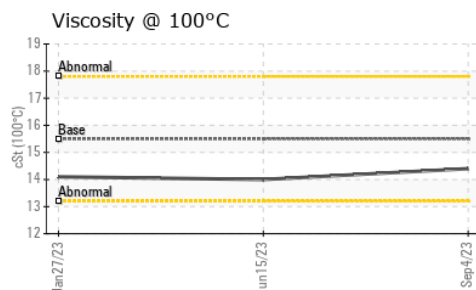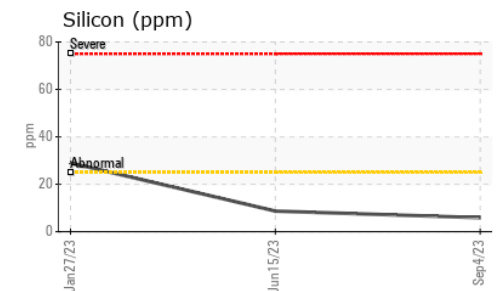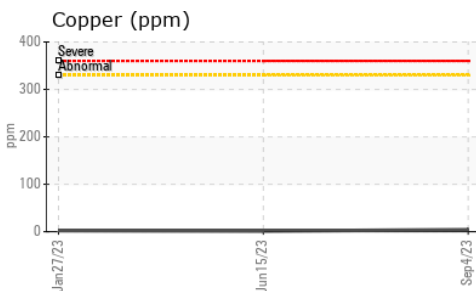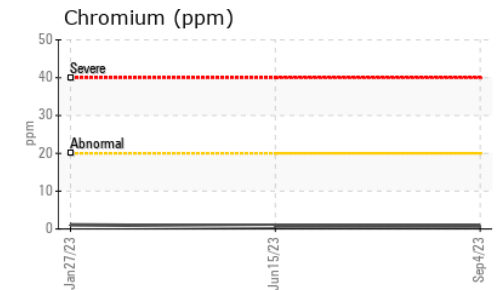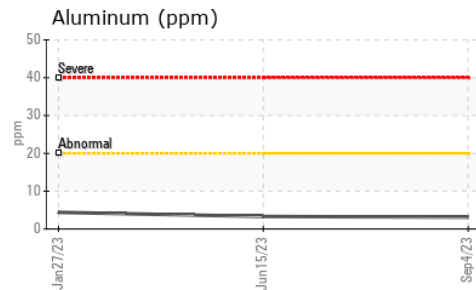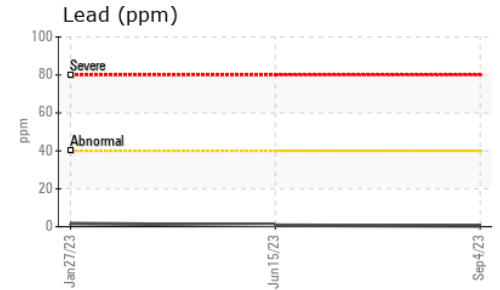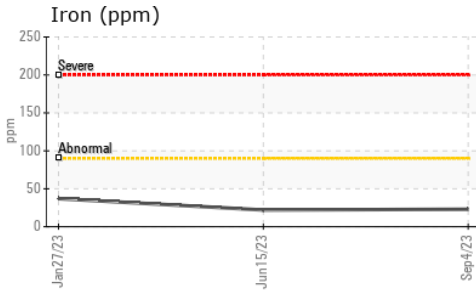

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0084342 **Received** : 12 Sep 2023
Lab Number : 02581706 **Diagnosed** : 14 Sep 2023
Unique Number : 5642771 **Diagnostician** : Wes Davis
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tim Greig
 tgreig@gflenv.com

T:
 F: