



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
CAPLAN
 Machine Id
#8330

Component
Front Center Transmission (Auto)
 Fluid
NOT GIVEN (20 LTR)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il n'y a aucun indice de contamination dans le fluide.

Fluid Condition

L'état de le fluide est acceptable pour la durée de service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0079095	---	---
Sample Date	Client Info	07 Sep 2023	---	---
Machine Age	hrs Client Info	15383	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185(m) >230	33	---	---
Chromium ppm	ASTM D5185(m) >2	0	---	---
Nickel ppm	ASTM D5185(m) >5	0	---	---
Titanium ppm	ASTM D5185(m) >2	<1	---	---
Silver ppm	ASTM D5185(m) >5	0	---	---
Aluminum ppm	ASTM D5185(m) >65	11	---	---
Lead ppm	ASTM D5185(m) >55	<1	---	---
Copper ppm	ASTM D5185(m) >85	6	---	---
Tin ppm	ASTM D5185(m) >5	1	---	---
Antimony ppm	ASTM D5185(m)	0	---	---
Vanadium ppm	ASTM D5185(m)	0	---	---
Beryllium ppm	ASTM D5185(m)	0	---	---
Cadmium ppm	ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185(m)	43	---	---
Barium ppm	ASTM D5185(m)	0	---	---
Molybdenum ppm	ASTM D5185(m)	0	---	---
Manganese ppm	ASTM D5185(m)	<1	---	---
Magnesium ppm	ASTM D5185(m)	<1	---	---
Calcium ppm	ASTM D5185(m)	126	---	---
Phosphorus ppm	ASTM D5185(m)	223	---	---
Zinc ppm	ASTM D5185(m)	7	---	---
Sulfur ppm	ASTM D5185(m)	1421	---	---
Lithium ppm	ASTM D5185(m)	1	---	---

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185(m) >20	7	---	---
Sodium ppm	ASTM D5185(m)	84	---	---
Potassium ppm	ASTM D5185(m) >20	<1	---	---
Glycol %	ASTM D7922*	0.0	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal scalar	Visual* NONE	NONE	---	---
Yellow Metal scalar	Visual* NONE	NONE	---	---
Precipitate scalar	Visual* NONE	NONE	---	---
Silt scalar	Visual* NONE	NONE	---	---
Debris scalar	Visual* NONE	VLITE	---	---
Sand/Dirt scalar	Visual* NONE	NONE	---	---
Appearance scalar	Visual* NORML	NORML	---	---
Odor scalar	Visual* NORML	NORML	---	---
Emulsified Water scalar	Visual* >0.1	NEG	---	---
Free Water scalar	Visual*	NEG	---	---











OIL ANALYSIS REPORT

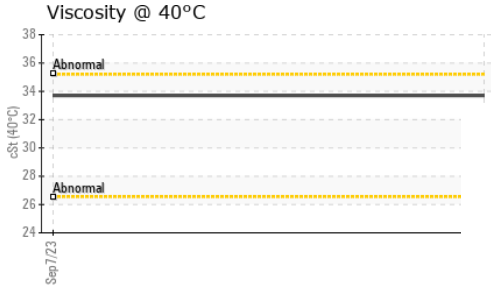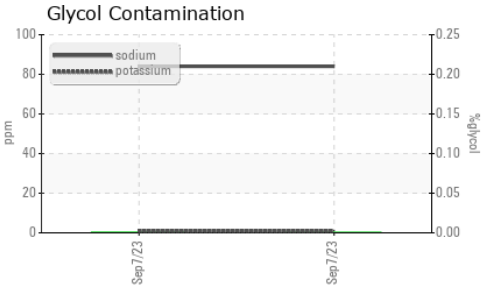

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	33.7	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

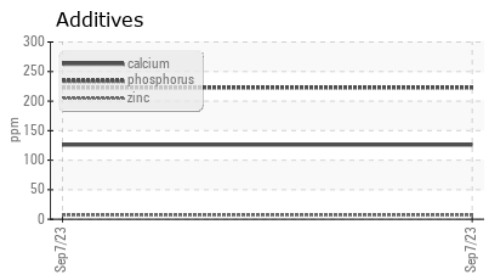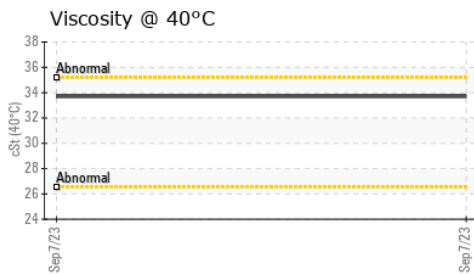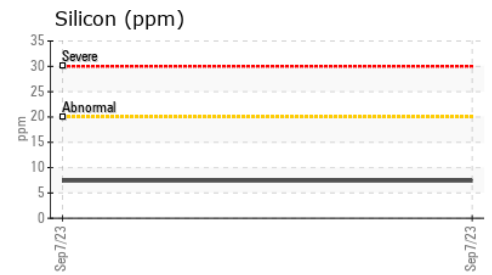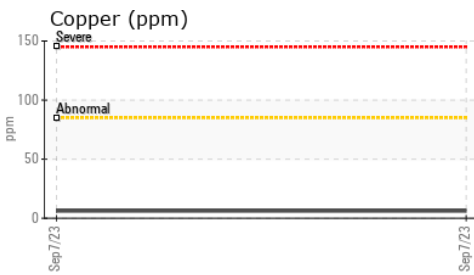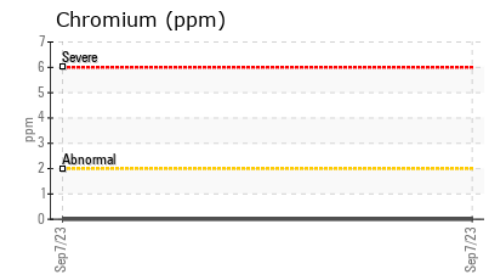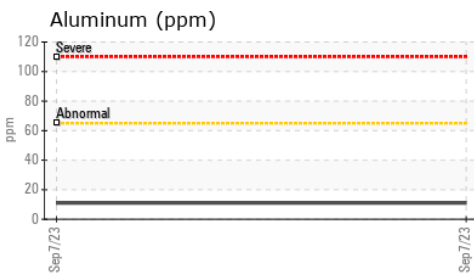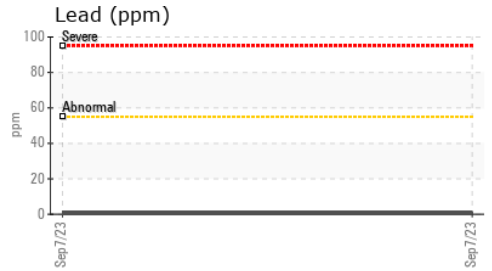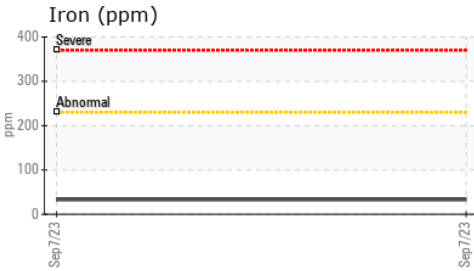

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0079095 **Received** : 12 Sep 2023
Lab Number : 02581871 **Diagnosed** : 14 Sep 2023
Unique Number : 5642936 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Vincent Maltais
 info@foretsstar.com
 T: 4(18)388-2626
 F: (418)388-2038