


PROBLEM SUMMARY


Area
Cranes
Machine Id
Crane - Mid - Hydraulic System (Reservoir) (S/N Sample Tag MA-04002-S4)
Component
Hydraulic System
Fluid
PETRO CANADA ATF DEXRON III/MERCON (800 LTR)

Sample Rating Trend

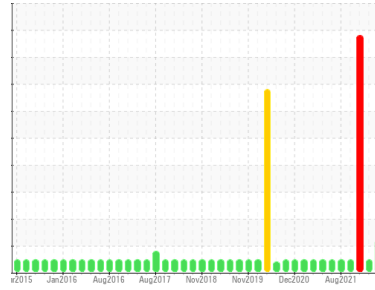

COMPONENT CONDITION SUMMARY

▲ Particle Trend

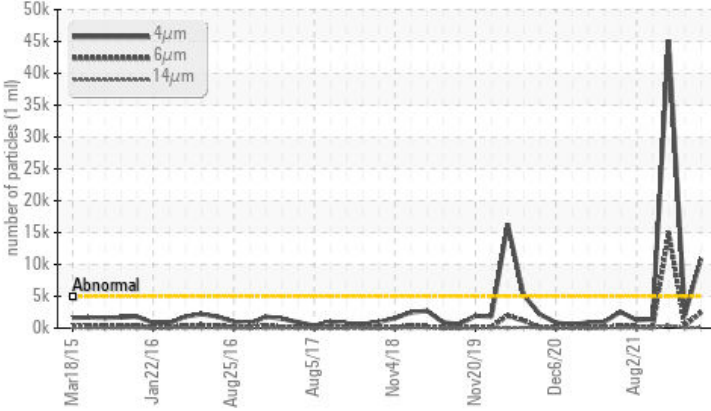

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	SEVERE
Particles >4µm	ASTM D7647	>5000	▲ 10892	2088	● 45175
Particles >6µm	ASTM D7647	>1300	▲ 2456	423	● 15067
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/18/14	18/16/13	● 23/21/16
PrtFilter				no image	no image

Customer Id: TERHAM
Sample No.: PC0052589
Lab Number: 02582136
Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1
(289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

14 Jun 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



ISO



02 May 2023 Diag: Kevin Marson

We advise that you check for the source of water entry. Check seals and/or filters for points of contaminant entry. We advise that you check all areas where dirt can enter the system. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this oil. We advise that you follow the water drain-off procedure for this component. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. Free water present. Elemental level of silicon (Si) above normal indicating ingress of seal material and/or dirt. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The white residue present in the sample is oil additive precipitate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



NORMAL



05 Oct 2021 Diag: Kevin Marson

Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area

Cranes

Machine Id


Crane - Mid - Hydraulic System (Reservoir) (S/N Sample Tag MA-04002-S4)

Component

Hydraulic System

Fluid

PETRO CANADA ATF DEXRON III/MERCON (800 LTR)

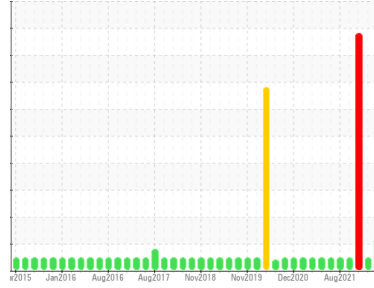

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0052589	PC0052198	PC0052679
Sample Date	Client Info	12 Aug 2023	14 Jun 2023	02 May 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	NORMAL	SEVERE

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm	ASTM D5185(m) >20	2	2
Chromium	ppm	ASTM D5185(m) >10	0	0
Nickel	ppm	ASTM D5185(m) >10	0	<1
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	0	0
Aluminum	ppm	ASTM D5185(m) >10	<1	<1
Lead	ppm	ASTM D5185(m) >20	2	1
Copper	ppm	ASTM D5185(m) >20	3	3
Tin	ppm	ASTM D5185(m) >10	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 130	82	81
Barium	ppm	ASTM D5185(m) 1.0	8	7
Molybdenum	ppm	ASTM D5185(m) 0.0	0	0
Manganese	ppm	ASTM D5185(m)	0	0
Magnesium	ppm	ASTM D5185(m) 1.0	<1	<1
Calcium	ppm	ASTM D5185(m) 20	35	35
Phosphorus	ppm	ASTM D5185(m) 280	318	290
Zinc	ppm	ASTM D5185(m) 10	140	128
Sulfur	ppm	ASTM D5185(m) 440	814	776
Lithium	ppm	ASTM D5185(m)	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	2	1
Sodium	ppm	ASTM D5185(m)	2	2
Potassium	ppm	ASTM D5185(m) >20	1	<1






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 10892	2088	● 45175
Particles >6µm	ASTM D7647 >1300	▲ 2456	423	● 15067
Particles >14µm	ASTM D7647 >160	126	43	▲ 420
Particles >21µm	ASTM D7647 >40	26	13	▲ 65
Particles >38µm	ASTM D7647 >10	0	1	4
Particles >71µm	ASTM D7647 >3	0	0	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/18/14	18/16/13	● 23/21/16

Particle Filter (Magn: 100 x)



OIL ANALYSIS REPORT

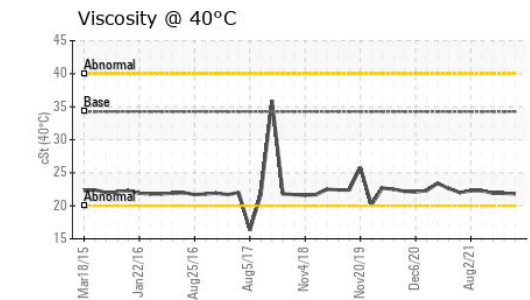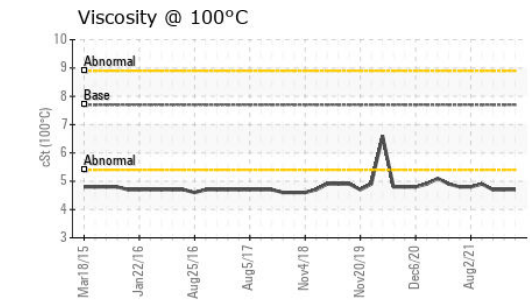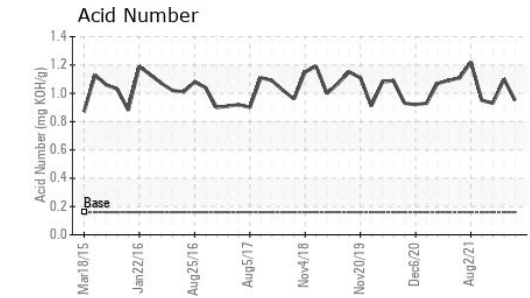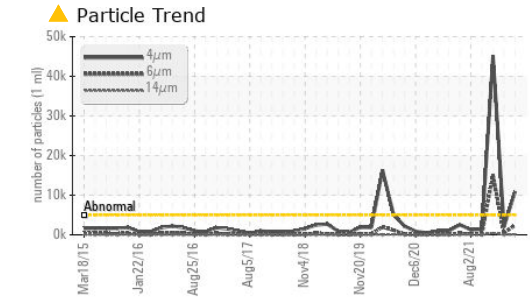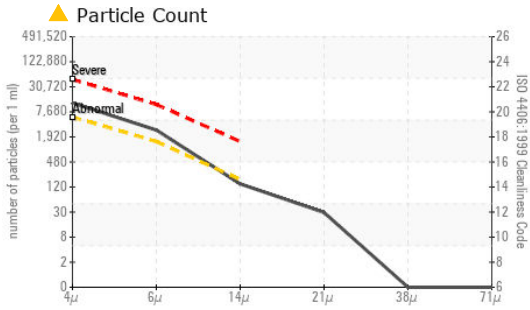

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0052589 **Received** : 13 Sep 2023
Lab Number : **02582136** **Diagnosed** : 18 Sep 2023
Unique Number : 5643201 **Diagnostician** : Bill Quesnel
Test Package : MAR 2 (Additional Tests: Bottom, BottomAnalysis, FilterPatch, KV100, PQ, PrtFilter, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.16	0.95	1.10	0.93
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	▲ LIGHT
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	.5%
Free Water	scalar	Visual*		NEG	NEG	▲ 5%

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	34.26	21.8	21.9	21.9
Visc @ 100°C	cSt	ASTM D7279(m)	7.7	4.7	4.7	4.7
Viscosity Index (VI)	Scale	ASTM D2270*	210	138	136	136

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						
PrtFilter					no image	no image