


Area
Cranes [450185705]
 Machine Id
Crane - Mid - Hoisting Winch (S/N Sample Tag MA-04002-S5)
 Component
Gearbox
 Fluid
PETRO CANADA GEARLUBE TOS 80W90 (26 LTR)

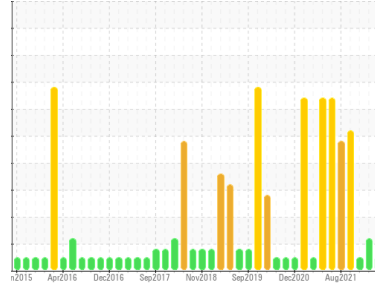

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0052247	PC0040135	PC0051997
Sample Date	Client Info	12 Sep 2023	05 Aug 2023	02 May 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ABNORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	0	0	0	
Iron	ppm	ASTM D5185(m) >150	5	4	2
Chromium	ppm	ASTM D5185(m) >10	0	0	0
Nickel	ppm	ASTM D5185(m) >10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	<1	<1	<1
Silver	ppm	ASTM D5185(m)	0	0	<1
Aluminum	ppm	ASTM D5185(m) >5	<1	<1	<1
Lead	ppm	ASTM D5185(m) >65	0	0	<1
Copper	ppm	ASTM D5185(m) >80	<1	<1	0
Tin	ppm	ASTM D5185(m) >8	0	0	0
Antimony	ppm	ASTM D5185(m) >5	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 240	229	236	245
Barium	ppm	ASTM D5185(m) 1	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m) 2	2	2	1
Calcium	ppm	ASTM D5185(m) 6	6	8	5
Phosphorus	ppm	ASTM D5185(m) 1000	1073	1068	1090
Zinc	ppm	ASTM D5185(m) 3	19	35	20
Sulfur	ppm	ASTM D5185(m) 19400	19689	21916	24329
Lithium	ppm	ASTM D5185(m)	<1	<1	<1






CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >20	6	5	4
Sodium	ppm	ASTM D5185(m)	<1	<1	<1
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>20000	128391	109767	63266
Particles >6µm	ASTM D7647	>5000	48921	41608	13600
Particles >14µm	ASTM D7647	>640	546	▲ 1891	367
Particles >21µm	ASTM D7647	>160	58	▲ 439	53
Particles >38µm	ASTM D7647	>40	9	12	1
Particles >71µm	ASTM D7647	>10	8	0	1
Oil Cleanliness	ISO 4406 (c)	>21/19/16	24/23/16	▲ 24/23/18	23/21/16

OIL ANALYSIS REPORT

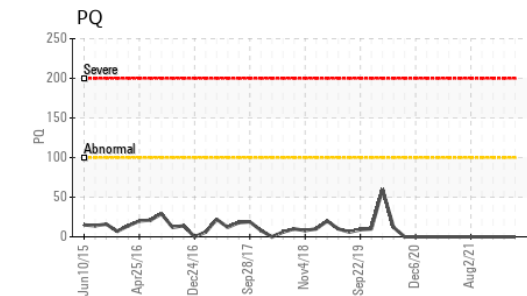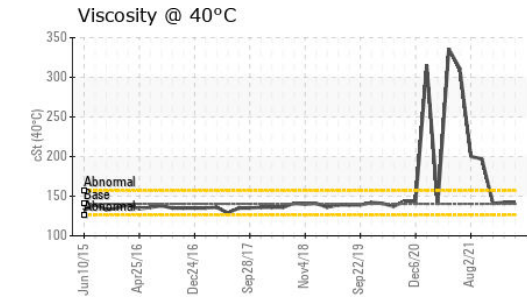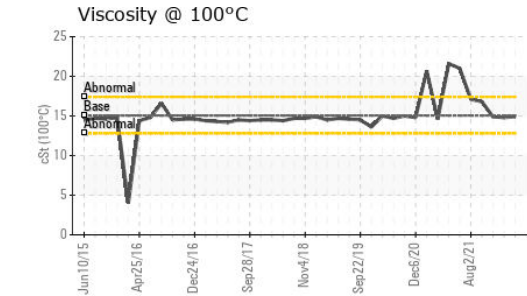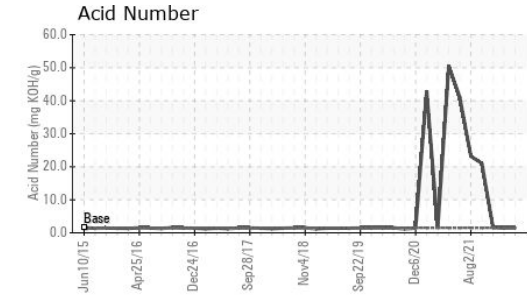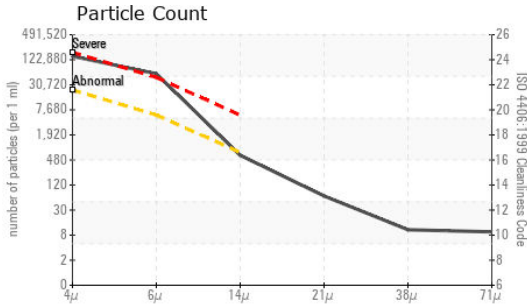


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.5	1.42	1.45	1.64

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	.2%	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	140.3	142	142	141
Visc @ 100°C	cSt	ASTM D7279(m)	15.05	14.9	14.8	14.9
Viscosity Index (VI)	Scale	ASTM D2270*	109	105	104	106

SAMPLE IMAGES

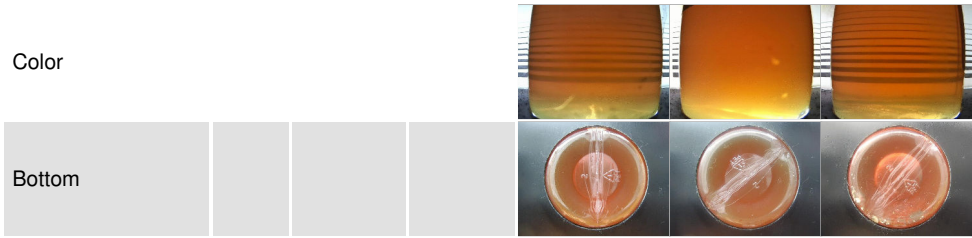

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0052247 **Received** : 13 Sep 2023
Lab Number : **02582285** **Diagnosed** : 15 Sep 2023
Unique Number : 5643350 **Diagnostician** : Kevin Marson
Test Package : MAR 2 (Additional Tests: KV100, PQ, PrtCount, VI)

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.