


# PROBLEM SUMMARY

Sample Rating Trend




ISO

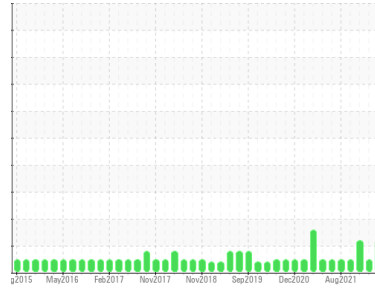

Area  
**Cranes**  
Machine Id  
**Crane - Mid Ship Slewing Gearbox #1 (S/N Sample Tag MA-04002-S7)**  
Component  
**Gearbox**  
Fluid  
**PETRO CANADA GEARLUBE TOS 80W90 (33 LTR)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

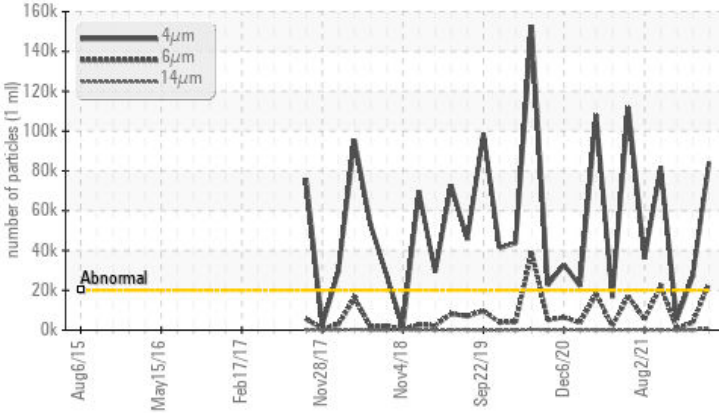

## RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | ATTENTION  | NORMAL   | ABNORMAL |
|-----------------|--------------|-----------|------------|----------|----------|
| Particles >14µm | ASTM D7647   | >640      | ▲ 1030     | 41       | 31       |
| Particles >21µm | ASTM D7647   | >160      | ▲ 232      | 8        | 7        |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | ▲ 24/22/17 | 22/19/13 | 20/17/12 |

Customer Id: TERHAM  
Sample No.: PC0061639  
Lab Number: 02582287  
Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Filter | ---    | ---  | ?       | We recommend you service the filters on this component.   |
| Resample      | ---    | ---  | ?       | We recommend an early resample to monitor this condition. |

## HISTORICAL DIAGNOSIS

### 14 Jun 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 02 May 2023 Diag: Kevin Marson

DEGRADATION



We recommend that you drain the oil from the component if this has not already been done. Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is above the recommended limit. The oil is no longer serviceable.

view report



### 05 Oct 2021 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area

**Cranes**

Machine Id


**Crane - Mid Ship Slewing Gearbox #1 (S/N Sample Tag MA-04002-S7)**

Component

**Gearbox**

Fluid

**PETRO CANADA GEARLUBE TOS 80W90 (33 LTR)**

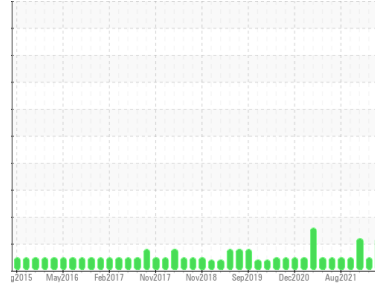

**DIAGNOSIS**

**Recommendation**

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

**Wear**

All component wear rates are normal.

**Contamination**

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>PC0061639</b>   | PC0052200   | PC0052678   |
| Sample Date        | Client Info |             |            | <b>12 Aug 2023</b> | 14 Jun 2023 | 02 May 2023 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>ATTENTION</b>   | NORMAL      | ABNORMAL    |






| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| PQ          |     | ASTM D8184*   |            | <b>0</b>     | 0        | 0        |
| Iron        | ppm | ASTM D5185(m) | >150       | <b>3</b>     | 2        | 2        |
| Chromium    | ppm | ASTM D5185(m) | >10        | <b>0</b>     | 0        | 0        |
| Nickel      | ppm | ASTM D5185(m) | >10        | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | 0        |
| Aluminum    | ppm | ASTM D5185(m) | >5         | <b>0</b>     | <1       | <1       |
| Lead        | ppm | ASTM D5185(m) | >65        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185(m) | >80        | <b>&lt;1</b> | <1       | 0        |
| Tin         | ppm | ASTM D5185(m) | >8         | <b>0</b>     | 0        | 0        |
| Antimony    | ppm | ASTM D5185(m) | >5         | <b>0</b>     | 0        | 0        |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) | 240        | <b>253</b>   | 252      | 217      |
| Barium     | ppm | ASTM D5185(m) | 1          | <b>&lt;1</b> | <1       | 0        |
| Molybdenum | ppm | ASTM D5185(m) | 0.0        | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | <1       |
| Magnesium  | ppm | ASTM D5185(m) | 2          | <b>&lt;1</b> | 1        | <1       |
| Calcium    | ppm | ASTM D5185(m) | 6          | <b>26</b>    | 26       | 44       |
| Phosphorus | ppm | ASTM D5185(m) | 1000       | <b>1093</b>  | 1035     | 1030     |
| Zinc       | ppm | ASTM D5185(m) | 3          | <b>19</b>    | 11       | 34       |
| Sulfur     | ppm | ASTM D5185(m) | 19400      | <b>22115</b> | 21560    | 22983    |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |

| CONTAMINANTS |     | method        | limit/base | current      | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >20        | <b>4</b>     | 3        | 3        |
| Sodium       | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | <1       | <1       |

| FLUID CLEANLINESS |  | method       | limit/base | current           | history1 | history2 |
|-------------------|--|--------------|------------|-------------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   | >20000     | <b>84298</b>      | 27236    | 5338     |
| Particles >6µm    |  | ASTM D7647   | >5000      | <b>23554</b>      | 3855     | 957      |
| Particles >14µm   |  | ASTM D7647   | >640       | <b>▲ 1030</b>     | 41       | 31       |
| Particles >21µm   |  | ASTM D7647   | >160       | <b>▲ 232</b>      | 8        | 7        |
| Particles >38µm   |  | ASTM D7647   | >40        | <b>5</b>          | 0        | 1        |
| Particles >71µm   |  | ASTM D7647   | >10        | <b>1</b>          | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >21/19/16  | <b>▲ 24/22/17</b> | 22/19/13 | 20/17/12 |

# OIL ANALYSIS REPORT

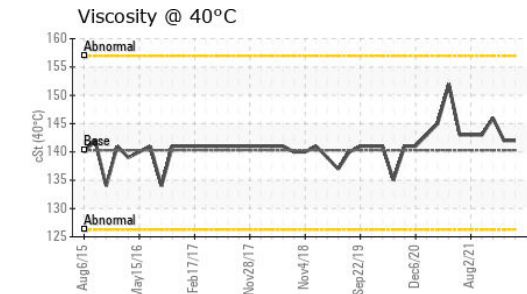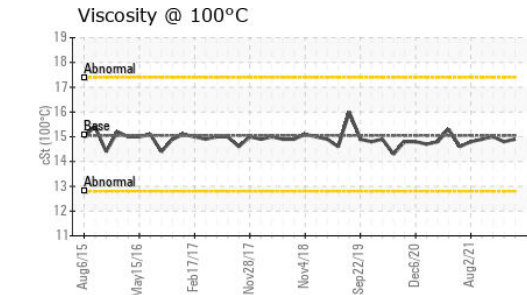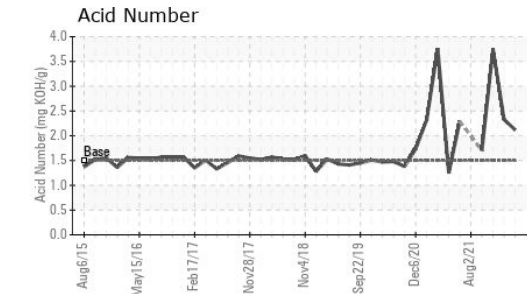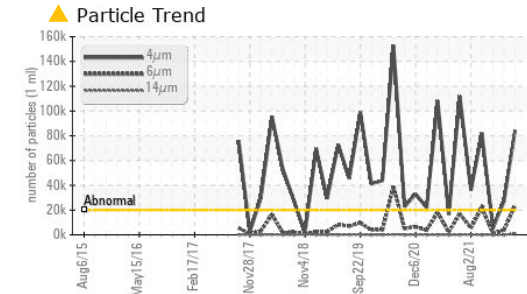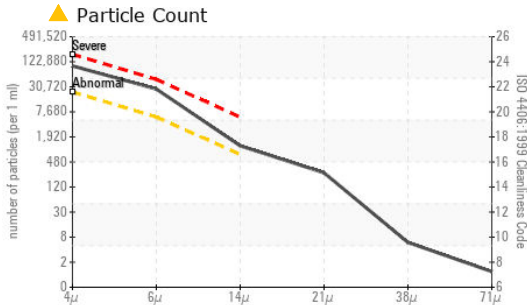


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | 1.5        | <b>2.12</b> | 2.33     | ▲ 3.75   |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>VLITE</b> | NONE     | NONE     |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | Visual* | NONE       | <b>VLITE</b> | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.2       | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES     |       | method        | limit/base | current     | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 140.3      | <b>142</b>  | 142      | 146      |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 15.05      | <b>14.9</b> | 14.8     | 15.0     |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 109        | <b>105</b>  | 104      | 102      |

## SAMPLE IMAGES

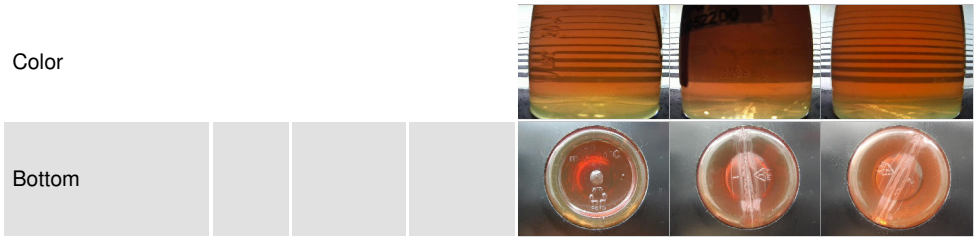

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0061639 **Received** : 13 Sep 2023  
**Lab Number** : **02582287** **Diagnosed** : 15 Sep 2023  
**Unique Number** : 5643352 **Diagnostician** : Kevin Marson  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, PrtCount, VI )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Street  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.