

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id MA-04001

Component

Unknown Component

NOT GIVEN (--- GAL)

-	I A	\sim	10	0	10
D	ГΔ		MC.	15	

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

				Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0039825		
Sample Date		Client Info		12 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS	3	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		9		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		4		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	IIIIII basc	235		
Barium		ASTM D5165(III) ASTM D5185(m)		235		
	ppm	1 /		0		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)				
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		26		
Phosphorus	ppm	ASTM D5185(m)		1119		
Zinc	ppm	ASTM D5185(m)		269		
Sulfur	ppm	ASTM D5185(m)		23915		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		3		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRAD	ATI <u>ON</u>	method	limit/base	current	history1	history2
		A OTA A DOZ4*		0.00		


2.02

Acid Number (AN)

mg KOH/g ASTM D974*



OIL ANALYSIS REPORT

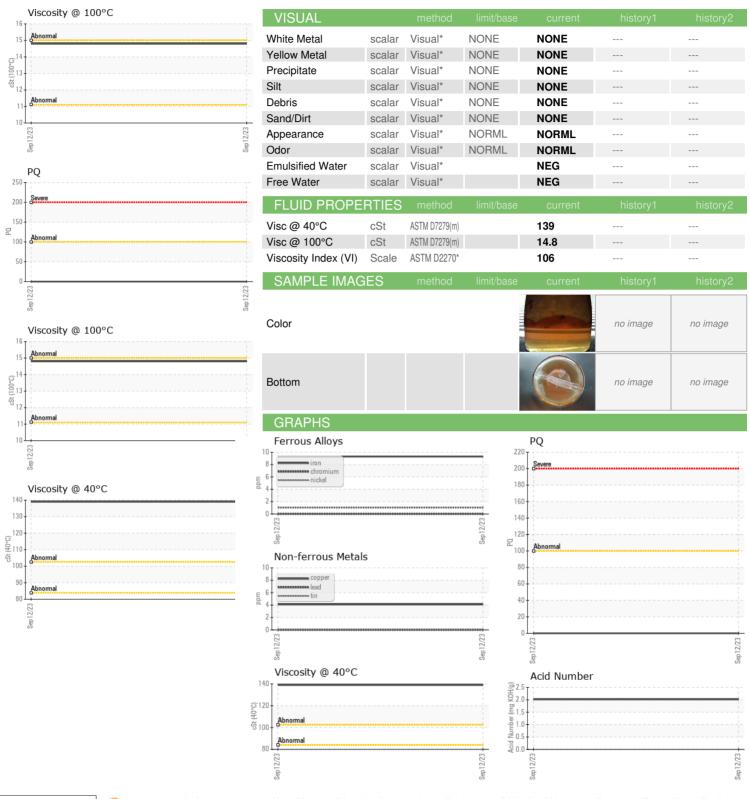



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PC0039825

: 5643355

Received : 02582290

Diagnosed : 15 Sep 2023 Diagnostician : Kevin Marson

: 13 Sep 2023

Test Package : MAR 2 (Additional Tests: KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects

Scotia Centre, 235 Water Strret St. John's, NL CA A1C 1B6

Contact: Deanne Badcock dbadcock@suncor.com T: (709)778-3843

F: (709)724-2784