


OIL ANALYSIS REPORT



NORMAL



MA-04001 AFT CRANE

Component

Unknown Component

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the sample.


Fluid Condition

Viscosity of sample indicates oil is within SAE 80W90 range, advise investigate. The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

			S	iep 2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0039818		
Sample Date		Client Info		12 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		8		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		2		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		<1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		220		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		1		
Calcium	ppm	ASTM D5185(m)		5		
Phosphorus	ppm	ASTM D5185(m)		1051		
Zinc	ppm	ASTM D5185(m)		67		
Sulfur	ppm	ASTM D5185(m)		17675		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		2		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRAD	OATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.64		



OIL ANALYSIS REPORT

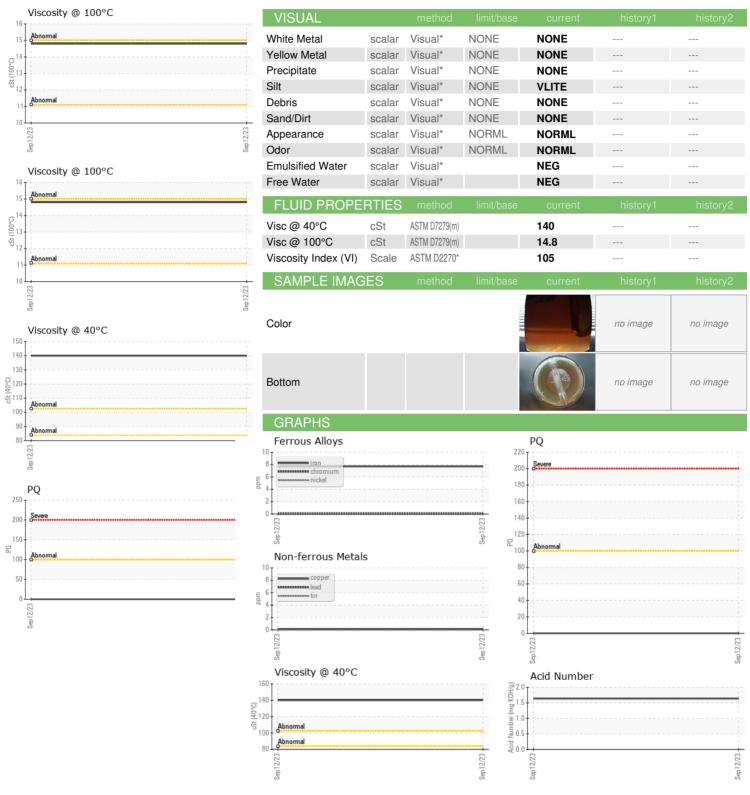



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 02582291

: PC0039818 : 5643356

Received Diagnosed

: 14 Sep 2023 Diagnostician : Kevin Marson Test Package : MAR 2 (Additional Tests: KV100, TAN Man, VI)

: 13 Sep 2023

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects Scotia Centre, 235 Water Strret

St. John's, NL CA A1C 1B6 Contact: Josh Hynes joshynes@suncor.com

> T: (709)778-3575 F: (709)724-2835