


PROBLEM SUMMARY


Area
Aft Machinery Space [450188488]
 Machine Id
Thruster Aft Center - Seal Oil System (S/N Sample Tag CL-06001-S3)
 Component
Sealing System
 Fluid
PETRO CANADA ENERGOL GR-XP ISO 150 (65 LTR)

Sample Rating Trend

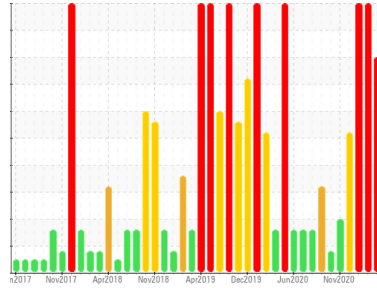

COMPONENT CONDITION SUMMARY

Particle Trend

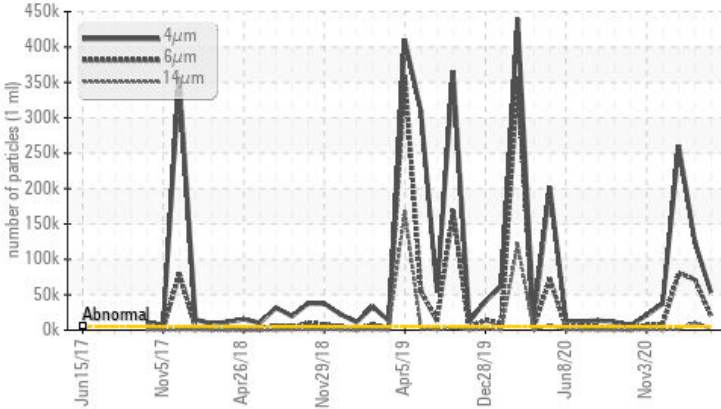

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	SEVERE
Particles >4µm	ASTM D7647	>5000	53288	124763	260851
Particles >6µm	ASTM D7647	>1300	20211	71826	80435
Particles >14µm	ASTM D7647	>160	2241	10767	1873
Particles >21µm	ASTM D7647	>40	710	3153	282
Particles >38µm	ASTM D7647	>10	20	126	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	23/22/18	24/23/21	25/24/18

Customer Id: TERHAM
 Sample No.: PC
 Lab Number: 02582296
 Test Package: MAR 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

31 Mar 2023 Diag: Kevin Marson

ISO



We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the fluid. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



26 Feb 2023 Diag: Kevin Marson

ISO



Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. We advise that you follow the water drain-off procedure for this component. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this fluid. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Particles >14µm are severely high. Particles >6µm are severely high. Oil Cleanliness are severely high. Particles >4µm are severely high. Particles >4µm are severely high.. Silicon ppm levels are abnormally high. Silicon ppm levels are abnormally high.. Particles >21µm are abnormally high. Water contamination levels are marginally high. Water contamination levels are marginally high.. ppm Water contamination levels are marginally high. There is a moderate concentration of water present in the fluid. Excessive free water present. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



22 Nov 2020 Diag: Kevin Marson

WATER




The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. Particles >14µm are abnormally high. Particles >21µm are abnormally high. Particles >4µm are abnormally high. Particles >6µm are abnormally high. Particles >38µm are notably high. Water contamination levels are marginally high. Water contamination levels are marginally high.. Water contamination levels are marginally high... ppm Water contamination levels are marginally high. There is a trace of moisture present in the fluid. Free water present. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report



Area
Aft Machinery Space [450188488]
Machine Id
Thruster Aft Center - Seal Oil System (S/N Sample Tag CL-06001-S3)
Component
Sealing System
Fluid
PETRO CANADA ENERGOL GR-XP ISO 150 (65 LTR)

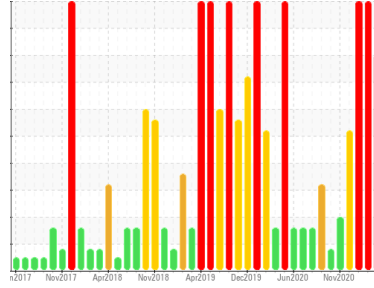

DIAGNOSIS

Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC	PC	PC0052229
Sample Date	Client Info	14 Aug 2023	31 Mar 2023	26 Feb 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		SEVERE	SEVERE	SEVERE

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm	ASTM D5185(m) >100	30	21
Chromium	ppm	ASTM D5185(m) >3	0	0
Nickel	ppm	ASTM D5185(m) >8	<1	<1
Titanium	ppm	ASTM D5185(m) 0	0	0
Silver	ppm	ASTM D5185(m) <1	0	0
Aluminum	ppm	ASTM D5185(m) >3	<1	<1
Lead	ppm	ASTM D5185(m) 0	0	0
Copper	ppm	ASTM D5185(m) >3	<1	1
Tin	ppm	ASTM D5185(m) 0	0	0
Antimony	ppm	ASTM D5185(m) 0	0	<1
Vanadium	ppm	ASTM D5185(m) 0	0	0
Beryllium	ppm	ASTM D5185(m) 0	0	0
Cadmium	ppm	ASTM D5185(m) 0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 3	3	1
Barium	ppm	ASTM D5185(m) 0	0	0
Molybdenum	ppm	ASTM D5185(m) <1	<1	<1
Manganese	ppm	ASTM D5185(m) <1	<1	<1
Magnesium	ppm	ASTM D5185(m) <1	<1	6
Calcium	ppm	ASTM D5185(m) 4	4	9
Phosphorus	ppm	ASTM D5185(m) 314	328	287
Zinc	ppm	ASTM D5185(m) 12	12	18
Sulfur	ppm	ASTM D5185(m) 9717	9763	8574
Lithium	ppm	ASTM D5185(m) <1	<1	<1






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	10	▲ 42
Sodium	ppm	ASTM D5185(m) 1	2	13
Potassium	ppm	ASTM D5185(m) >20	<1	1

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000 53288	124763	260851
Particles >6µm	ASTM D7647	>1300 20211	71826	80435
Particles >14µm	ASTM D7647	>160 2241	10767	1873
Particles >21µm	ASTM D7647	>40 710	3153	▲ 282
Particles >38µm	ASTM D7647	>10 20	126	1
Particles >71µm	ASTM D7647	>3 1	▲ 10	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14 23/22/18	24/23/21	25/24/18

OIL ANALYSIS REPORT

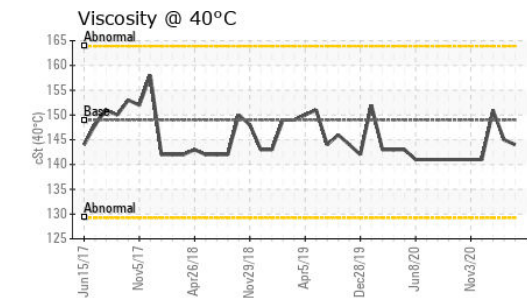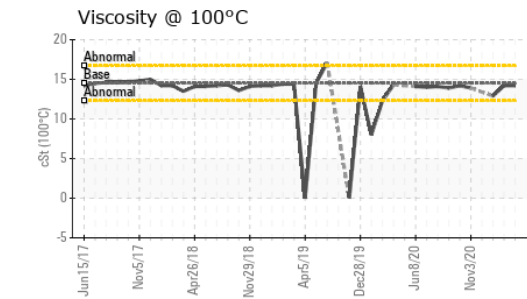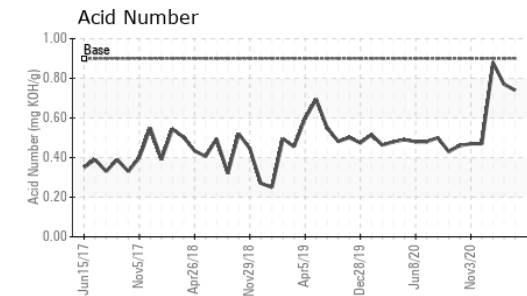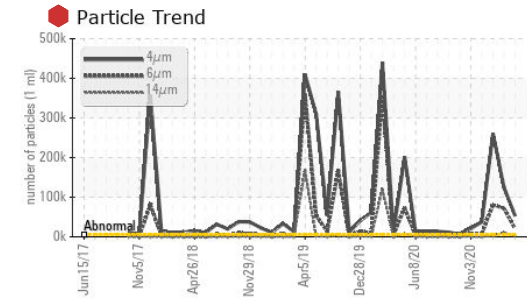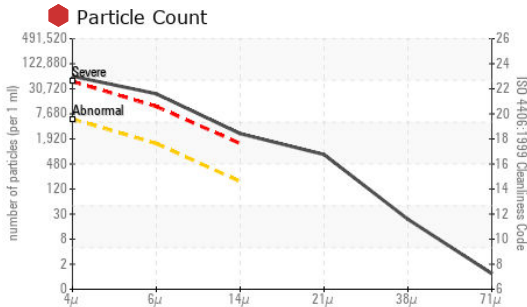

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN) mg KOH/g	ASTM D974*	0.9	0.74	0.77	0.88


VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	VLITE	VLITE	NONE
Debris	scalar Visual*	NONE	VLITE	LIGHT	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	▲ LAYRD
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	NEG	NEG	▲ .5%	
Free Water	scalar Visual*	NEG	NEG	▲ >10%	

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D7279(m)	149	144	145	151
Visc @ 100°C	cSt ASTM D7279(m)	14.5	14.2	14.2	12.9
Viscosity Index (VI)	Scale ASTM D2270*		95	94	71

SAMPLE IMAGES

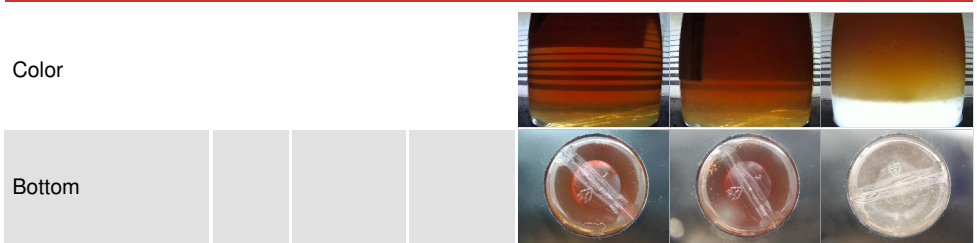

Color

Bottom



ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC
Lab Number : 02582296
Unique Number : 5643361
Test Package : MAR 2 (Additional Tests: KV100, PQ, PrtCount, TAN Man, VI)

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.