




OIL ANALYSIS REPORT

Sample Rating Trend

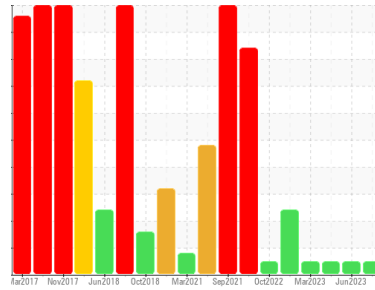

NORMAL



Machine Id
4587

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0090590	GFL0085916	GFL0072814
Sample Date	Client Info	17 Sep 2023	25 Jun 2023	04 Jun 2023
Machine Age	hrs	Client Info	1663	1477
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >110	56	31	58
Chromium	ppm ASTM D5185(m) >4	3	2	4
Nickel	ppm ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >2	<1	<1	0
Aluminum	ppm ASTM D5185(m) >25	3	2	3
Lead	ppm ASTM D5185(m) >45	17	4	10
Copper	ppm ASTM D5185(m) >85	4	2	6
Tin	ppm ASTM D5185(m) >4	1	<1	2
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	2	2	2
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 50	59	58	62
Manganese	ppm ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 950	966	956	978
Calcium	ppm ASTM D5185(m) 1050	1053	1029	1086
Phosphorus	ppm ASTM D5185(m) 995	1033	1054	1065
Zinc	ppm ASTM D5185(m) 1180	1201	1169	1184
Sulfur	ppm ASTM D5185(m) 2600	2325	2435	2373
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >30	8	5	7
Sodium	ppm ASTM D5185(m)	9	6	7
Potassium	ppm ASTM D5185(m) >20	1	<1	1

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	1	0.5	0.8
Nitration	Abs/cm ASTM D7624* >20	12.2	8.5	10.6
Sulfation	Abs/.1mm ASTM D7415* >30	25.6	21.0	22.7

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	25.0	17.6	20.3











OIL ANALYSIS REPORT

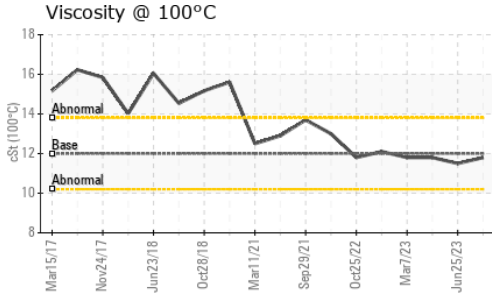

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	---	NONE
Precipitate	scalar	Visual*	NONE	NONE	---	NONE
Silt	scalar	Visual*	NONE	NONE	---	NONE
Debris	scalar	Visual*	NONE	NONE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	---	NONE
Appearance	scalar	Visual*	NORML	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.8	11.5	11.8

GRAPHS

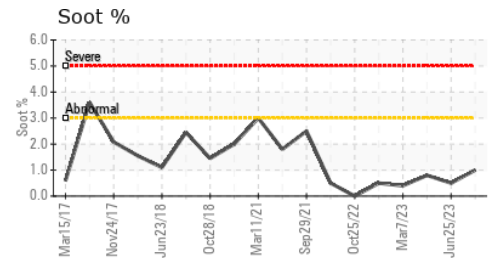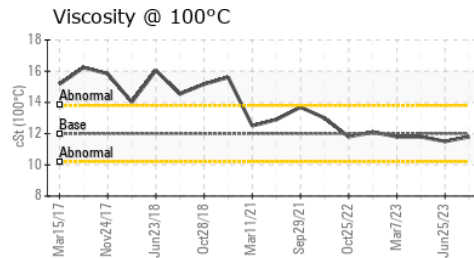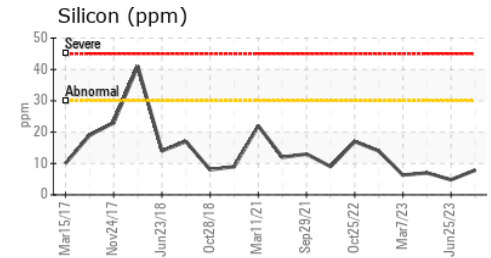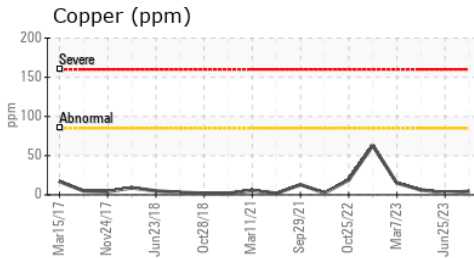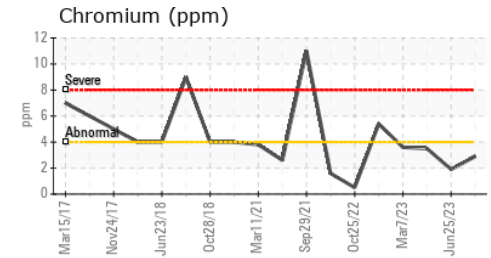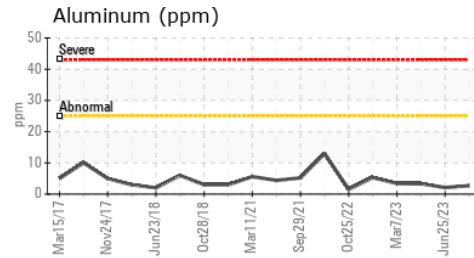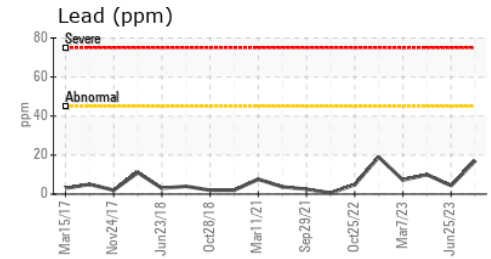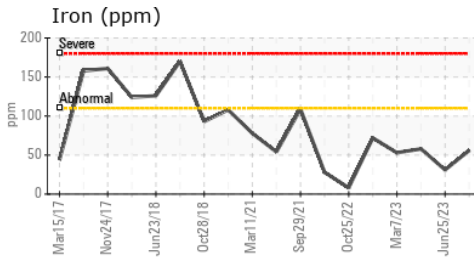

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0090590 **Received** : 18 Sep 2023
Lab Number : 02583111 **Diagnosed** : 19 Sep 2023
Unique Number : 5644176 **Diagnostician** : Bill Quesnel
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T:
 F: