




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

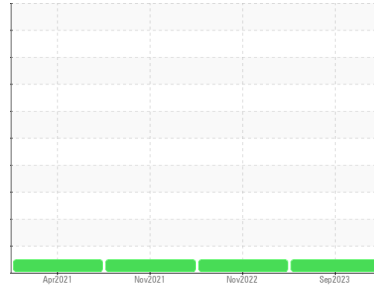

Machine Id
831005

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090591	GFL0059954	GFL0039022
Sample Date	Client Info		10 Sep 2023	20 Nov 2022	05 Nov 2021
Machine Age	hrs	Client Info	5961	4104	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	10	9	14
Chromium	ppm	ASTM D5185(m) >4	<1	<1	2
Nickel	ppm	ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	<1	0
Silver	ppm	ASTM D5185(m) >3	0	0	<1
Aluminum	ppm	ASTM D5185(m) >9	2	2	3
Lead	ppm	ASTM D5185(m) >30	1	1	2
Copper	ppm	ASTM D5185(m) >35	1	1	3
Tin	ppm	ASTM D5185(m) >4	<1	<1	1
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	8	9	8
Barium	ppm	ASTM D5185(m) 5	0	0	<1
Molybdenum	ppm	ASTM D5185(m) 50	54	52	58
Manganese	ppm	ASTM D5185(m) 0	<1	<1	2
Magnesium	ppm	ASTM D5185(m) 560	580	569	541
Calcium	ppm	ASTM D5185(m) 1510	1672	1625	1567
Phosphorus	ppm	ASTM D5185(m) 780	750	782	754
Zinc	ppm	ASTM D5185(m) 870	929	923	949
Sulfur	ppm	ASTM D5185(m) 2040	1979	2020	1987
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	4	4	5
Sodium	ppm	ASTM D5185(m)	10	3	9
Potassium	ppm	ASTM D5185(m) >20	<1	0	3

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	12.1	11.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.4	25.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.9	20.6




OIL ANALYSIS REPORT

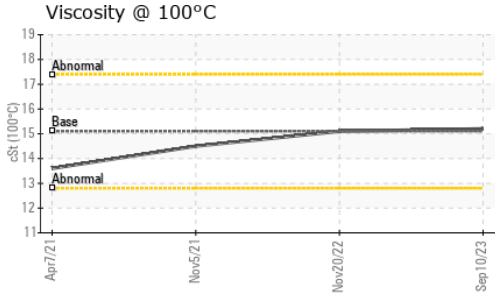

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	15.2	15.1	14.5

GRAPHS

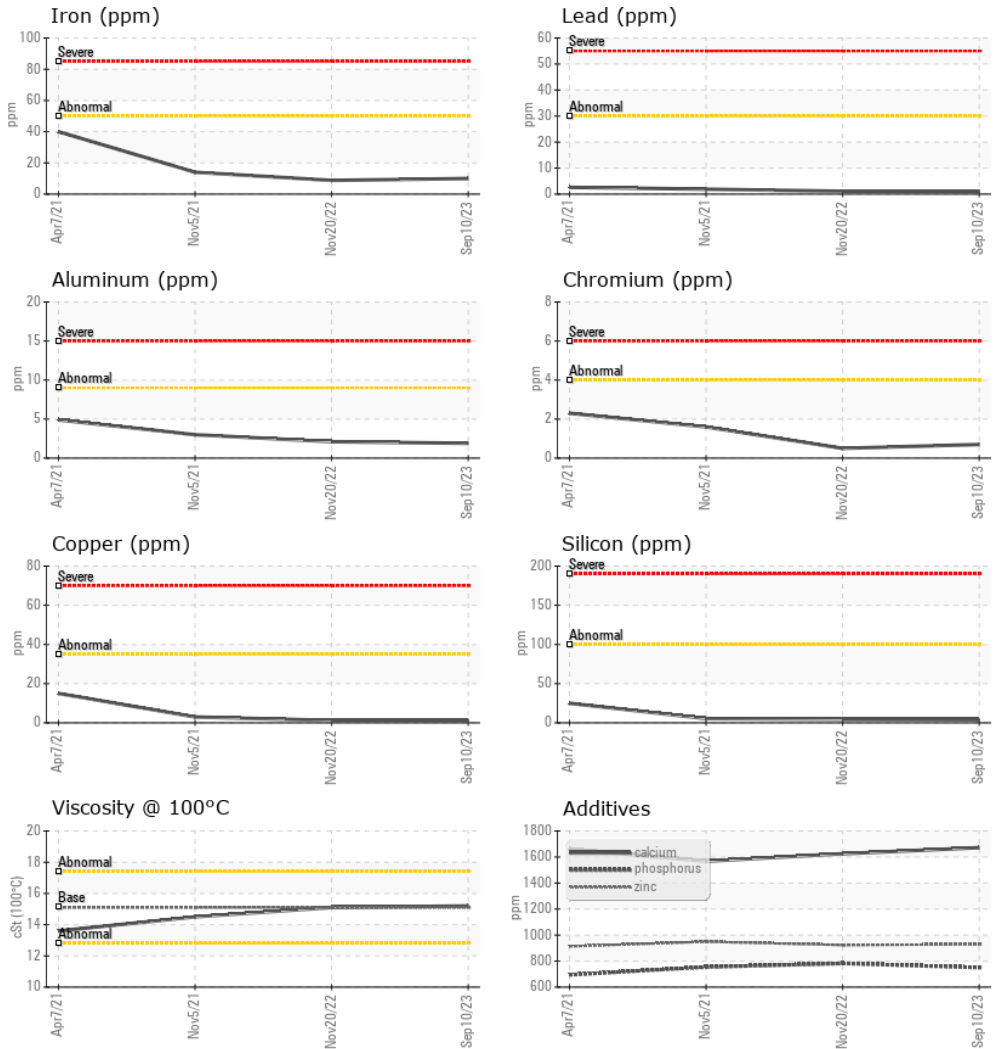

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0090591 **Received** : 18 Sep 2023
Lab Number : 02583112 **Diagnosed** : 18 Sep 2023
Unique Number : 5644177 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: